National Highways Authority of India

(Ministry of Road Transport & Highways)
Government of India

Construction work of 4-laning of Shahganj bypass end to Badi (Package-IV) of NH-146B from design km 102.000 to design km 142.357 (Design length 40.357 km) under NH (O) in the State of Madhya Pradesh on Hybrid Annuity Mode

CONCESSION AGREEMENT

between

National Highways Authority of India

G - 5&6, Sector – 10, Dwarka, New Delhi – 110 075

and

Shahganj Badi Highways Private Limited

MCC, Opp. Nasrani Petrol Pump, Village Pal, Jodhpur, Rajasthan -342001

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India V3.0-HS2307130516179(Pradeep

August, 2024

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

National Highways Authority of India

(Ministry of Road Transport & Highways)
Government of India

Construction work of 4-laning of Shahganj bypass end to Badi (Package-IV) of NH-146B from design km 102.000 to design km 142.357 (Design length 40.357 km) under NH (O) in the State of Madhya Pradesh on Hybrid Annuity Mode

INDEX

No.	DESCRIPTION
Vol. I	Concession Agreement (Including Schedules), Corrigendum And Financial Bid
Vol. II	NIT, RFP, Technical Bid & SPV Documents
Vol. III	Drawings

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India V3.0-HS2307130516179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

National Highways Authority of India

(Ministry of Road Transport & Highways)
Government of India

Construction work of 4-laning of Shahganj bypass end to Badi (Package-IV) of NH-146B from design km 102.000 to design km 142.357 (Design length 40.357 km) under NH (O) in the State of Madhya Pradesh on Hybrid Annuity Mode

CONCESSION AGREEMENT

Between

National Highways Authority of India

G - 5&6, Sector – 10, Dwarka, New Delhi – 110 075

And

Shahganj Badi Highways Private Limited

MCC, Opp. Nasrani Petrol Pump, Village Pal, Jodhpur, Rajasthan-342001

VOLUME – I

(Concession Agreement (Including Schedules), Corrigendum And Financial Bid)

August, 2024

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India V3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed,
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

INDEX FOR VOLUME – I - CONCESSION AGREEMENT WITH SCHEDULES

SL. NO.	DESCRIPTION
1.	Concession Agreement
2.	Schedules (A to S)
3.	Integrity Pact executed between Authority and Concessionaire
4.	**Annexure:**
5.	**Corrigendum & Reply to Pre Bid Queries**
	• Corrigendum I dated 25.01.2024 w.r.t Extension of Bid Due Date & amendment in DCA
	• Corrigendum II dated 5.02.2024 w.r.t Extension of Bid Due Date
	• Addendum-I dated 09.02.2024 Reply to the Pre-Bid Queries
	• Corrigendum III dated 09.02.2024 w.r.t amendment in NIB, RFP, DCA, Schedules & Drawings
	• Corrigendum IV dated 14.02.2024 w.r.t Extension of Bid Due Date
	• Corrigendum V dated 20.02.2024 w.r.t Extension of Bid Due Date
	• Corrigendum VI dated 20.02.2024 w.r.t Extension of Bid Due Date, Revised Technical Schedules A to D & Reply to Pre-Bid Query
	• Addendum II dated 23.02.2024 wr.t Reply to the Additional Pre Bid Queries
6.	Copy of Financial Bid along with Appendix-IB (Letter Comprising the Financial Bid)
7.	Letter of Award (LOA) issued by NHAI vide Letter No.: NHAI-HQ/MP/Bhudhni-Badi/pkg-4/HAM/2023 dated 15.03.2024
8.	Acceptance of Letter of Award by Selected Bidder

Note: This Agreement shall be read in conjunction with all the amendments mentioned above.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Concession Agreement

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Index

PART I		
Concession Agreement		
1	**Definitions and Interpretation**	
	1.1	Definitions
	1.2	Interpretation
	1.3	Measurements and arithmetic conventions
	1.4	Priority of agreements, clauses and schedules
PART II		
The Concession		
2	**Scope of the Project**	
	2.1	Scope of the Project
3	**Grant of Concession**	
	3.1	The Concession
4	**Conditions Precedent**	
	4.1	Conditions Precedent
	4.2	Damages for delay by the Authority
	4.3	Damages for delay by the Concessionaire
	4.4	Commencement of Concession Period
	4.5	Deemed termination upon delay
5	**Obligations of the Concessionaire**	
	5.1	Obligations of the Concessionaire
	5.2	Obligations relating to Project Agreements
	5.3	Obligations relating to Change in Ownership
	5.4	Obligations relating to employment of foreign nationals
	5.5	Obligations relating to employment of trained personnel
	5.6	Facilities for differently abled and elderly persons
	5.7	Branding of Project
	5.8	Sole purpose of the Concessionaire
	5.9	Obligations relating to Local Content
6	**Obligations of the Authority**	
	6.1	Obligations of the Authority
	6.2	Maintenance obligations prior to Appointed Date
	6.3	Obligations relating to refinancing
7	**Representations and Warranties**	
	7.1	Representations and warranties of the Concessionaire

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051617 9(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

	7.2	Representations and warranties of the Authority
	7.3	Disclosure
8	**Disclaimer**	
	8.1	Disclaimer
PART III		
Development and Operations		
9	**Performance Security**	
	9.1	Performance Security
	9.2	Appropriation of Performance Security
	9.3	Release of Performance Security
	9.4	Deleted
	9.5	Deleted
	9.6	References to Performance Security
	9.7	Additional Performance Security
	9.8	Appropriation and Release of Additional Performance Security
10	**Right of Way**	
	10.1	The Site
	10.2	License, Access and Right of Way
	10.3	Procurement of the Site
	10.4	Site to be free from Encumbrances
	10.5	Protection of Site from Encumbrances
	10.6	Special/temporary right of way
	10.7	Access to the Authority and Independent Engineer
	10.8	Geological and archaeological finds
	10.9	Land for wayside amenities
11	**Utilities, Associated Roads and Trees**	
	11.1	Existing utilities and roads
	11.2	Shifting of obstructing utilities
	11.3	New utilities and roads
	11.4	Felling of Trees
12	**Construction of the Project**	
	12.1	Obligations prior to commencement of construction
	12.2	Drawings
	12.3	Construction of the Project
	12.4	Maintenance during Construction Period
	12.5	Deleted

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051617 9(Pradeep

Signature Not Verified
Digitally Signed,
Name: PROXKey (v 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

13	**Monitoring of Construction**	
	13.1	Monthly progress reports
	13.2	Inspection
	13.3	Tests
	13.4	Delays during construction
	13.5	Suspension of unsafe Construction Works
	13.6	Video recording
14	**Completion Certificate**	
	14.1	Tests
	14.2	Completion Certificate
	14.3	Provisional Certificate
	14.4	Completion of Punch List items
	14.5	Withholding of Provisional or Completion Certificate
	14.6	Rescheduling of Tests
15	**Entry into Commercial Service**	
	15.1	Commercial Operation Date (COD)
	15.2	Damages for delay
16	**Change of Scope**	
	16.1	Change of Scope
	16.2	Procedure for Change of Scope
	16.3	Payment for Change of Scope
	16.4	Restrictions on certain works
	16.5	Power of the Authority to undertake works
	16.6	Reduction in Scope of the Project
	16.7	Effect of Change in Scope on the O&M Costs.
17	**Operation and Maintenance**	
	17.1	O&M obligations of the Concessionaire
	17.2	Maintenance Requirements
	17.3	Maintenance Manual
	17.4	Maintenance Program
	17.5	Safety, breakdowns and accidents
	17.6	De-commissioning due to Emergency
	17.7	Project closure
	17.8	Damages for breach of maintenance obligations
	17.9	Authority's right to take remedial measures
	17.10	Overriding powers of the Authority
	17.11	Restoration of loss or damage to the Project

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051617 9(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

	17.12	Modifications to the Project
	17.13	Excuse from performance of obligations
	17.14	Deleted
	17.15	Installation and operation of CCTV
	17.16	Advertising on the site
18	**Safety Requirements**	
	18.1	Safety Requirements
	18.2	Expenditure on Safety Requirements
19	**Monitoring of Operation and Maintenance**	
	19.1	Monthly status reports
	19.2	Inspection
	19.3	Tests
	19.4	Remedial measures
	19.5	Reports of unusual occurrence
20	**Regulation and Management**	
	20.1	Traffic regulation by the Concessionaire
	20.2	Police assistance
	20.3	Buildings for Traffic Aid Posts
	20.4	Medical Aid Posts
	20.5	Buildings for Medical Aid Posts
	20.6	Computer systems and network
	20.7	Recurring expenditure on Police assistance
	20.8	Recurring expenditure on Medical Aid Posts
21	**Independent Engineer**	
	21.1	Appointment of Independent Engineer
	21.2	Duties and functions
	21.3	Remuneration
	21.4	Termination of appointment
	21.5	Authorized signatories
	21.6	Dispute resolution
	21.7	Interim arrangement
PART IV		
Financial Covenants		
22	**Financial Close**	
	22.1	Financial Close
	22.2	Termination due to failure to achieve Financial Close

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051617 9(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

23	**Payment of Bid Project Cost**
23.1	Bid Project Cost
23.2	Adjusted Bid Project Cost
23.3	Payment of Bid Project Cost
23.4	Payment during Construction Period
23.5	Bonus on early completion
23.6	Annuity Payments during Operation Period
23.7	O&M Payments
23.8	Mobilization advance
23.9	Treatment of incomplete works
24	**Article 24**
	Deleted
25	**Escrow Account**
25.1	Escrow Account
25.2	Deposits into Escrow Account
25.3	Withdrawals during Concession Period
25.4	Withdrawals upon Termination
26	**Insurance**
26.1	Insurance during Concession Period
26.2	Insurance Cover
26.3	Notices to the Authority
26.4	Evidence of insurance Cover
26.5	Remedy for failure to insure
26.6	Waiver of subrogation
26.7	Concessionaire's waiver
26.8	Application of insurance proceeds
26.9	Compliance with conditions of insurance policies
27	**Accounts And Audit**
27.1	Audited Accounts
27.2	Appointment of Auditors
27.3	Certification of claims by Statutory Auditors
27.4	Set-off
27.5	Dispute resolution
Part-V	
Force Majeure and Termination	
28	**Force Majeure**

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051617 9(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

	28.1	Force Majeure
	28.2	Non-Political Event
	28.3	Indirect Political Event
	28.4	Political Event
	28.5	Duty to report Force Majeure Event
	28.6	Effect of Force Majeure Event on the Concession
	28.7	Allocation of costs arising out of Force Majeure
	28.8	Termination Notice for Force Majeure Event
	28.9	Termination Payment for Force Majeure Event
	28.10	Dispute resolution
	28.11	Excuse from performance of obligations
	28.12	Deleted
29	**Compensation for Breach of Agreement**	
	29.1	Compensation for default by the Concessionaire
	29.2	Compensation for default by the Authority
	29.3	Deleted
	29.4	Mitigation of costs and damage
30	**Suspension of Concessionaire's Rights**	
	30.1	Suspension upon Concessionaire Default
	30.2	Authority to act on behalf of Concessionaire
	30.3	Revocation of Suspension
	30.4	Substitution of Concessionaire
	30.5	Termination
31	**Termination**	
	31.1	Termination for Concessionaire Default
	31.2	Termination for Authority Default
	31.3	Termination Payment
	31.4	Certain limitations on Termination Payment
	31.5	Other rights and obligations of the Authority
	31.6	Survival of rights
32	**Divestment of Rights and Interest**	
	32.1	Divestment Requirements
	32.2	Inspection and cure
	32.3	Cooperation and assistance on transfer of Project
	32.4	Vesting Certificate
	32.5	Divestment costs etc.
33	**Defects Liability after Termination**	

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051617 9(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

	33.1	Liability for defects after Termination
	33.2	Retention in Escrow Account
Part VI		
Other Provisions		
34	**Assignment and Charges**	
	34.1	Restrictions on assignment and charges
	34.2	Permitted assignment and charges
	34.3	Substitution Agreement
	34.4	Assignment by the Authority
35	**Change In Law**	
	35.1	Increase in Costs
	35.2	Reduction in costs
	35.3	Protection of NPV
	35.4	Restriction on cash compensation
	35.5	Deleted
36	**Liability And Indemnity**	
	36.1	General indemnity
	36.2	Indemnity by the Concessionaire
	36.3	Notice and contest of claims
	36.4	Defense of claims
	36.5	No Consequential claims
	36.6	Survival on Termination
37	**Rights and Title over The Site**	
	37.1	Licensee rights
	37.2	Access rights of the Authority and others
	37.3	Property taxes
	37.4	Restriction on sub-letting
38	**Dispute Resolution**	
	38.1	Dispute resolution
	38.2	Conciliation
	38.3	Arbitration
	38.4	Adjudication by Regulatory Authority, Tribunal or Commission
39	**Disclosure**	
	39.1	Disclosure of Specified Documents
	39.2	Disclosure of Documents relating to Safety
	39.3	Withholding of Disclosure of Protected Documents

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey v 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

40	**Redressal of Public Grievances**
40.1	Complaints Register
40.2	Redressal of Complaints
41	**Miscellaneous**
41.1	Governing law and jurisdiction
41.2	Waiver of immunity
41.3	Depreciation
41.4	Delayed payments
41.5	Waiver
41.6	Liability for review of Documents and Drawings
41.7	Exclusion of implied warranties etc.
41.8	Survival
41.9	Entire Agreement
41.10	Severability
41.11	No partnership
41.12	Third parties
41.13	Successors and assigns
41.14	Notices
41.15	Language
41.16	Counterparts
41.17	State Support Agreement
42	**Definitions**
42.1	Definitions

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Part I

Preliminary

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 1

DEFINITIONS AND INTERPRETATION

1.1 **Definitions**

The words and expressions beginning with capital letters and defined in this Agreement (including those in Article 42) shall, unless the context otherwise requires, have the meaning ascribed thereto herein, and the words and expressions defined in the Schedules and used therein shall have the meaning ascribed thereto in the Schedules.

1.2 **Interpretation**

1.2.1 In this Agreement, unless the context otherwise requires,

(a) references to any legislation or any provision thereof shall include amendment or re-enactment or consolidation of such legislation or any provision thereof so far as such amendment or re-enactment or consolidation applies or is capable of applying to any transaction entered into hereunder;

(b) references to laws of India or Indian law or regulation having the force of law shall include the laws, acts, ordinances, rules, regulations, bye laws or notifications which have the force of law in the territory of India and as from time to time may be amended, modified, supplemented, extended or re-enacted;

(c) references to a "**person**" and words denoting a natural person shall be construed as a reference to any individual, firm, company, corporation, society, trust, government, state or agency of a state or any association or partnership (whether or not having separate legal personality) of two or more of the above and shall include successors and assigns;

(d) the table of contents, headings or sub-headings in this Agreement are for convenience of reference only and shall not be used in, and shall not affect, the construction or interpretation of this Agreement;

(e) the words **"include" and "including**" are to be construed without limitation and shall be deemed to be followed by **"without limitation"** or **"but not limited to"** whether or not they are followed by such phrases;

(f) references to **"construction"** or **"building"** include, unless the context otherwise requires, investigation, design, engineering, procurement, delivery, transportation, installation, processing, fabrication, testing, commissioning and other activities incidental to the construction, and **"construct"** or **"build"** shall be construed accordingly;

(g) references to "**development**" include, unless the context otherwise requires, construction, renovation, refurbishing, augmentation, upgradation and other activities incidental thereto, and **"develop"** shall be construed accordingly;

(h) any reference to any period of time shall mean a reference to that according to Indian Standard Time;

(i) any reference to day shall mean a reference to a calendar day;

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

(j) Reference to a **"business day"** shall be construed as reference to a day (other than a Sunday) on which banks in the State are generally open for business;

(k) any reference to month shall mean a reference to a calendar month as per the Gregorian calendar;

(l) references to any date, period or Project Milestone shall mean and include such date, period or Project Milestone as-may be extended pursuant to this Agreement;

(m) any reference to any period commencing **"from"** a specified day or date and **"till"** or **"until"** a specified day or date shall include both such days or dates; provided that if the last day of any period computed under this Agreement is not a business day, then the period shall run until the end of the next business day;

(n) the words importing singular shall include plural and vice versa;

(o) References to any gender shall include the other and the neutral gender;

(p) "**lakh**" means a hundred thousand (100,000) and "crore" means ten million (10,000,000);

(q) **"Indebtedness**" shall be construed so as to include any obligation (whether incurred as principal or surety) for the payment or repayment of money, whether present or future, actual or contingent;

(r) references to the **"winding-up**", **"dissolution", "insolvency", or "reorganisation**" of a company or corporation shall be construed so as to include any equivalent or analogous proceedings under the law of the jurisdiction in which such company or corporation is incorporated or any jurisdiction in which such company or corporation carries on business including the seeking of liquidation, winding-up, reorganisation, dissolution, arrangement, protection or relief of debtors;

(s) save and except as otherwise provided in this Agreement, any reference, at any time, to any agreement, deed, instrument, license or document of any description shall be construed as reference to that agreement, deed, instrument, license or other document as amended, varied, supplemented, modified or suspended at the time of such reference; provided that this Sub-clause (s) shall not operate so as to increase liabilities or obligations of the Authority hereunder or pursuant hereto in any manner whatsoever;

(t) any agreement, consent, approval, authorization, notice, communication, information report or any other correspondence required under or pursuant to this Agreement from or by any Party or the Independent Engineer shall be valid and effective only if it is routed through NHAI Data Lake (unless the law requires to send such notice, communication, etc, through physical/any other specified mode only) under the hand of a duly authorized representative of such Party or the Independent Engineer, as the case may be, in this behalf and not otherwise;

(u) the Schedules and Recitals to this Agreement and the Request for Proposals (**"RFP"**) forms an integral part of this Agreement and will be in full force and effect as though they were expressly set out in the body of this Agreement; and

(v) references to Recitals, Articles, Clauses, Sub-clauses, Provisos or Schedules in this Agreement shall, except where the context otherwise requires, mean references to

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed
Name: IPROXKey vc3.0 WD25611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Recitals, Articles, Clauses, Sub-clauses, Provisos and Schedules of or to this Agreement; reference to an Annex shall, subject to anything to the contrary specified therein, be construed as a reference to an Annex to the Schedule in which such reference occurs; and reference to a Paragraph shall, subject to anything to the contrary specified therein, be construed as a reference to a Paragraph of the Schedule or Annex, as the case may be, in which such reference appears;

(w) the damages payable by either Party to the other of them, as set forth in this Agreement, whether on per diem basis or otherwise, are mutually agreed genuine pre-estimated loss and damage likely to be suffered and incurred by the Party entitled to receive the same and are not by way of penalty (the **"Damages"**); and

(x) Time shall be of the essence in the performance of the Parties' respective obligations. If any time period specified herein is extended, such extended time shall also be of the essence.

1.2.2 Unless expressly provided otherwise in this Agreement, any Documentation required to be provided or furnished by the Concessionaire to the Authority and/ or the Independent Engineer shall be provided free of cost and in three copies, and if the Authority and/or the Independent Engineer is required to return any such Documentation with their comments and/or approval, they shall be entitled to retain two copies thereof.

1.2.3 The rule of construction, if any, that a contract should be interpreted against the parties responsible for the drafting and preparation thereof, shall not apply.

1.2.4 Any word or expression used in this Agreement shall, unless otherwise defined or construed in this Agreement, bear its ordinary English meaning and, for these purposes, the General Clauses Act 1897 shall not apply.

1.3 **Measurements and arithmetic conventions**

All measurements and calculations shall be in the metric system and calculations done to 2 (two) decimal places, with the third digit of 5 (five) or above being rounded up and below 5 (five) being rounded down.

1.4 **Priority of agreements, clauses and schedules**

1.4.1 This Agreement, and all other agreements and documents forming part of or referred to in this agreement are to be taken as mutually explanatory and, unless otherwise expressly provided elsewhere in this Agreement, the priority of this Agreement and other documents and agreements forming part hereof or referred to herein shall, in the event of any conflict between them, be in the following order:

(a) this Agreement; and

(b) all other agreements and documents forming part hereof or referred to herein,

i.e. the Agreement at (a) above shall prevail over the agreements and documents at (b) above.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

1.4.2 Subject to provisions of Clause 1.4.1, in case of ambiguities or discrepancies within this Agreement, the following shall apply:

Signature Not Verified
Digitally Signed by PROXKey V 3.0-WD05611496(WD PROXKey)
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

(a) between two or more Clauses of this Agreement, the provisions of a specific Clause relevant to the issue under consideration shall prevail over those in other Clauses;

(b) between the Clauses of this Agreement and the Schedules, the Clauses shall prevail and between Schedules and Annexes, the Schedules shall prevail;

(c) between any two Schedules, the Schedule relevant to the issue shall prevail;

(d) between the written description on the Drawings and the Specifications and Standards, the latter shall prevail;

(e) between the dimension scaled from the Drawing and its specific written dimension, the latter shall prevail; and

(f) between any value written in numerals and that in words, the latter shall prevail.

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619(Pradeep

Signature Not Verified
Digitally Signed,
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Part II

The Concession

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051616179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 2

SCOPE OF THE PROJECT

2.1 Scope of the Project

The scope of the Project (the **"Scope of the Project"**) shall mean and include, during the Concession Period:

(a) construction of the Project on the Site set forth in Schedule-A and as specified in Schedule-B together with provision of Project Facilities as specified in Schedule-C, and in conformity with the Specifications and Standards set forth in Schedule-D;

(b) operation and maintenance of-the Project in accordance with the provisions of this Agreement; and

(c) performance and fulfillment of all other obligations of the Concessionaire in accordance with the provisions of this Agreement and matters incidental thereto or necessary for the performance of any or all of the obligations of the Concessionaire under this Agreement

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051 6179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 3

GRANT OF CONCESSION

3.1 **The Concession**

3.1.1 Subject to and in accordance with the provisions of this Agreement, Applicable Laws and Applicable Permits, the Authority hereby grants to the Concessionaire the concession set forth herein including the exclusive right, license and authority to construct, operate and maintain the Project (the "**Concession**") during the Construction Period of 730 (seven hundred and thirty) days and Operation Period of 15 (Fifteen) years commencing from COD, and the Concessionaire hereby accepts the Concession and agrees to implement the Project subject to and in accordance with the terms and conditions set forth herein.

3.1.2 Subject to and in accordance with the provisions of this Agreement, the Concession hereby granted shall oblige or entitle (as the case may be) the Concessionaire to:

(a) Right of Way, access and license to the Site for the purpose of and to the extent conferred by the provisions of this Agreement;
(b) finance and construct the Project;
(c) manage, operate and maintain the Project;
(d) perform and fulfill all of the Concessionaire's obligations under and in accordance with this Agreement;
(e) save as otherwise expressly provided in this Agreement, bear and pay all costs, expenses and charges in connection with or incidental to the performance of the obligations of the Concessionaire under this Agreement; and
(f) neither assign, transfer or sublet or create any lien or encumbrance on this Agreement, or the Concession hereby granted or on the whole or any part of the Project nor transfer, lease or part possession thereof, save and except as expressly permitted by this Agreement or the Substitution Agreement.

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619179(Pradeep

Signature Not Verified
Digitally Signed,
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 4

CONDITIONS PRECEDENT

4.1 Conditions Precedent

4.1.1 Save and except as expressly provided in Articles 4, 5, 6, 7, 8, 9, 10, 22, 28,38 and 41, or unless the context otherwise requires, the respective rights and obligations of the Parties under this Agreement shall be subject to the satisfaction in full of the conditions precedent specified in this Clause 4.1 (the "**Conditions Precedent**").

4.1.2 The Concessionaire may, upon providing the Performance Security to the Authority in accordance with Article 9, at any time after 30 (thirty) days from the date of this Agreement or on an earlier day acceptable to the Authority, by notice require the Authority to satisfy all of the Conditions Precedent set forth in this Clause 4.1.2 within a period of 120 (one hundred and twenty) days thereafter. The Conditions Precedent required to be satisfied by the Authority shall be deemed to have been fulfilled when the Authority shall have:

(a) procured for the Concessionaire the Right of Way to the Site in accordance with the provisions of Clauses 10.3.1 and 10.3.2;

(b) procured all Applicable Permits relating to environmental protection, and conservation in respect land forming part of the Right of Way under Clause 10.3.1 and 10.3.2;

(c) procured forest clearance for and in respect land forming part of the Right of Way under Clause 10.3.1 and 10.3.2, save and except permission for cutting trees; and

(d) procured approval of the General Arrangement Drawings for the road over bridges/under bridges at level crossings on the Project.

Provided that the Authority shall be entitled to an additional period, not exceeding 90 (ninety) days beyond the period of 150 days without being liable for payment of any damages, for fulfillment of the Conditions Precedent set forth in this Clause.

4.1.3 The Conditions Precedent required to be satisfied by the Concessionaire within a period of 150 (one hundred and fifty) days from the date of this Agreement shall be deemed to have been fulfilled when the Concessionaire shall have:

(a) provided Performance Security to the Authority alongwith the Additional Performance Security, if required in terms of Clause 9.1 and Clause 9.7 of this Agreement. For the avoidance of doubt it is clarified and agreed that the Concessionaire is required to provide the Performance Security and the Additional Performance Security, if required, within 30 days of signing of this Agreement;

(b) executed and procured execution of the Escrow Agreement;

(c) executed and procured execution of the Substitution Agreement;

(d) procured all the Applicable Permits specified in Part-I of Schedule-E unconditionally or if subject to conditions, then all such conditions required to be fulfilled by the date specified therein shall have been satisfied in full and such Applicable Permits are in full force and effect;

(e) executed the Financing Agreements and delivered to the Authority a [illegible] copies thereof, duly attested by a Director of the Concessionaire;

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29 Aug 2024 20:06:49

(f) delivered to the Authority 3 (three) true copies of the Financial Package and the Financial Model, duly attested by a Director of the Concessionaire, along with 3 (three) soft copies of the Financial Model in MS Excel version or any substitute thereof, which is acceptable to the Senior Lenders; and

(g) delivered to the Authority {from the Consortium Members, their respective} confirmation of the correctness of the representations and warranties set forth in Sub-clauses (k), (l) and (m) of Clause 7.1 of this Agreement.

4.1.4 Each Party shall make all reasonable endeavours to satisfy the Conditions Precedent within the time stipulated and shall provide the other Party with such reasonable cooperation as may be required to assist that Party in satisfying the Conditions Precedent for which that Party is responsible. Subject only to payment of Damages, it is agreed between the Parties that the obligation to fulfill each parties' Conditions Precedent is an independent obligation of the respective Party.

4.1.5 The Parties shall notify each other in writing at least once a month on the progress made in satisfying the Conditions Precedent. Each Party shall promptly inform the other Party when any Condition Precedent for which it is responsible has been satisfied.

4.2 Damages for delay by the Authority

In the event that (i) the Authority does not procure fulfillment of any or all of the Conditions Precedent set forth in Clause 4.1.2 within the period specified in respect thereof, and (ii) the delay has not occurred as a result of breach of this Agreement by the Concessionaire or due to Force Majeure, the Authority shall pay to the Concessionaire Damages in an amount calculated at the rate of 0.2% (zero point two per cent) of the Performance Security for each day's delay until the fulfillment of such Conditions Precedent, subject to the maximum limit equal to the amount of the Bid Security and upon reaching such limit, the Concessionaire may, in its sole discretion terminate the Agreement. The Damages payable hereunder shall be the sole remedy available to the Concessionaire for delay by the Authority.

Provided further that in the event of delay by the Concessionaire in procuring fulfillment of the Conditions Precedent specified in Clause 4.1.3, no Damages shall be due or payable by the Authority under this Clause 4.2 until the date on which the Concessionaire shall have procured fulfillment of the Conditions Precedent specified in Clause 4.1.3.

4.3 Damages for delay by the Concessionaire

In the event that (i) the Concessionaire does not procure fulfillment of any or all of the Conditions Precedent set forth in Clause 4.1.3 within the period specified in respect thereof, and (ii) the delay has not occurred as a result of failure to fulfill the obligations under Clause 4.1.2 or other breach of this Agreement by the Authority, or due to Force Majeure, the Concessionaire shall pay to the Authority Damages in an amount calculated at the rate of 0.3% (zero point three per cent) of the Performance Security for each day's delay until the fulfillment of such Conditions Precedent. Provided, however, that the Damages payable hereunder shall be subject to the maximum limit equal to the amount of the Performance Security and upon reaching such limit, the Authority may, in its sole discretion and subject to the provisions of Clause 9.2, terminate the Agreement. Provided further that in the event of delay by the Authority in procuring fulfillment of the Conditions Precedent specified in Clause 4.1.2, no Damages shall be due or payable by the Concessionaire under this Clause

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey v 3.0-WD05611496(WD PROXKey)
Date: 29 Aug 2016 20:06:49

4.3 until the date on which the Authority shall have procured fulfillment of the Conditions Precedent specified in Clause 4.1.2.

4.4 Commencement of Concession Period

The date on which Financial Close is achieved and all the Conditions Precedent specified in Clause 4.1 are satisfied shall be the Appointed Date which shall be the date of commencement of the Concession Period. For the avoidance of doubt, the Parties agree that the Concessionaire may, upon occurrence of the Appointed Date hereunder, by notice convey the particulars thereof to the Authority, and shall thereupon be entitled to commence construction on the Project.

4.5 Deemed Termination upon delay

Without prejudice to the provisions of Clauses 4.2 and 4.3, and subject to the provisions of Clause 9.2, the Parties expressly agree that in the event the Appointed Date does not occur, for any reason whatsoever, before the 1st (first) anniversary of the date of this Agreement or the extended period provided in accordance with this Agreement, all rights, privileges, claims and entitlements of the Concessionaire under or arising out of this Agreement shall be deemed to have been waived by, and to have ceased with the concurrence of the Concessionaire, and the Concession Agreement shall be deemed to have been terminated by mutual agreement of the Parties. Provided, however, that in the event the non-occurrence of the Appointed Date is for reasons attributable to the Concessionaire, the Performance Security and the Additional Performance Security, if any, of the Concessionaire shall be encashed and appropriated by the Authority as Damages thereof.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 5

OBLIGATIONS OF THE CONCESSIONAIRE

5.1 Obligations of the Concessionaire

5.1.1 Subject to and on the terms and conditions of this Agreement, the Concessionaire shall, at its own cost and expense, procure finance for and undertake the design, engineering, procurement, construction, operation and maintenance of the Project and observe, fulfill, comply with and perform all its obligations set out in this Agreement or arising hereunder.

5.1.2 The Concessionaire shall comply with all Applicable Laws and Applicable Permits (including renewals as required) in the performance of its obligations under this Agreement.

5.1.3 Save and except as otherwise provided in this Agreement or Applicable Laws, as the case may be, the Concessionaire shall, in discharge of all its obligations under this Agreement, conform with and adhere to Good Industry Practice at all times.

5.1.4 The Concessionaire shall, at its own cost and expense, in addition to and not in derogation of its obligations elsewhere set out in this Agreement:

(a) make, or cause to be made, necessary applications to the relevant Government Instrumentalities with such particulars and details as may be required for obtaining Applicable Permits, other than those set forth in Clause 4.1.2, and obtain and keep in force and effect such Applicable Permits in conformity with Applicable Laws;

(b) procure, as required, the appropriate proprietary rights, licenses, agreements and permissions for materials, methods, processes, know-how and systems used or incorporated into the Project;

(c) perform and fulfill its obligations under the Financing Agreements;

(d) make reasonable efforts to maintain harmony and good industrial relations among the personnel employed by it or its Contractors in connection with the performance of its obligations under this Agreement;

(e) upon written request from the Authority, make reasonable efforts to facilitate the acquisition of land and procuring of environmental and forest clearances required for the purposes of the Agreement;

(f) ensure and procure that its Contractors comply with all Applicable Permits and Applicable Laws in the performance by them of any of the Concessionaire's obligations under this Agreement;

(g) always act in a manner consistent with the provisions of this Agreement and not cause or fail to do any act, deed or thing, whether intentionally or otherwise, which may in any manner be violative of any of the provisions of this Agreement;

(h) support, cooperate with and facilitate the Authority in the implementation and operation of the Project in accordance with the provisions of this Agreement; and

(i) transfer the Project to the Authority upon Termination or Expiry, in accordance with the provisions of this Agreement.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey v3.0 WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

5.2 Obligations relating to Project Agreements

5.2.1 It is expressly agreed that the Concessionaire shall, at all times, be responsible and liable for all its obligations under this Agreement notwithstanding anything contained in the Project Agreements or any other agreement, and no default under any Project Agreement or agreement shall excuse the Concessionaire from its obligations or liability hereunder.

5.2.2 The Concessionaire shall submit to the Authority the drafts of all Project Agreements, or any amendments or replacements thereto, for its review and comments, and the Authority shall have the right but not the obligation to undertake such review and provide its comments, if any, to the Concessionaire within 30 (thirty) days of the receipt of such drafts. Within 7 (seven) days of execution of any Project Agreement or amendment thereto, the Concessionaire shall submit to the Authority a true copy thereof, duly attested by a Director of the Concessionaire, for its record. For the avoidance of doubt, it is agreed that the review and comments hereunder shall be limited to ensuring compliance with the terms of this Agreement. It is further agreed that any failure or omission of the Authority to review and/ or comment hereunder shall not be construed or deemed as acceptance of any such agreement or document by the Authority. No review and/ or observation of the Authority and/ or its failure to review and/ or convey its observations on any document shall relieve the Concessionaire of its obligations and liabilities under this Agreement in any manner nor shall the Authority be liable for the same in any manner whatsoever.

5.2.3 The Concessionaire shall not make any addition, replacement or amendments to any of the Financing Agreements without the prior written consent of the Authority if such addition, replacement or amendment has, or may have, the effect of imposing or increasing any financial liability or obligation on the Authority, and in the event that any replacement or amendment is made without such consent, the Concessionaire shall not enforce such replacement or amendment nor permit enforcement thereof against the Authority. For the avoidance of doubt, the Authority acknowledges and agrees that it shall not unreasonably withhold its consent for restructuring or rescheduling of the debt of the Concessionaire and shall respond to the request for consent no later than 30 days from the receipt of such request from the Concessionaire.

5.2.4 The Concessionaire shall procure that each of the Project Agreements contains provisions that entitle the Authority and / or Lenders Representative to step into such agreement, in its sole discretion, in substitution of the Concessionaire in the event of Termination or Suspension (the "Covenant"). Further, it is clarified that in case both the Authority and Lenders' Representative decide to exercise their right to step-in, the Authority shall have the sole right to step into the Project Agreements. For the avoidance of doubt, it is expressly agreed that in the event the Authority does not exercise such rights of substitution within a period not exceeding 90 (ninety) days from the Transfer Date, the Project Agreements shall be deemed to cease to be in force and effect on the Transfer Date without any liability whatsoever on the Authority and the Covenant shall expressly provide for such eventuality. The Concessionaire expressly agrees to include the Covenant in all its Project Agreements and undertakes that it shall, in respect of each of the Project Agreements, obtain and deliver to the Authority an acknowledgment and undertaking, in a form acceptable to the Authority, from the counter party(ies) of each of the Project Agreements, whereunder such counter party(ies) shall acknowledge and accept the Covenant and undertake to be bound by the same and not to seek any relief or remedy whatsoever from the Authority in the event of Termination or Suspension.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey V 3.0-WD056114960(WD PROXKey)
Date: 29 Aug 2024 20:06:49

5.2.5 Notwithstanding anything to the contrary contained in this Agreement, the Concessionaire agrees and acknowledges that selection or replacement of the EPC Contractor and an O&M Contractor and execution of the EPC Contract and O&M Contract shall be subject to the prior approval of the Authority from national security and public interest perspective, the decision of the Authority in this behalf being final, conclusive and binding on the Concessionaire, and undertakes that it shall not give effect to any such selection or contract without prior approval of the Authority. For the avoidance of doubt, it is expressly agreed that approval of the Authority hereunder shall be limited to national security and public interest perspective, and the Authority shall endeavor to convey its decision thereon expeditiously and no later than 30 days from the date of receipt of the proposal alongwith the draft agreement by the Authority. It is also agreed that the Authority shall not be liable in any manner on account of grant or otherwise of such approval and that such approval or denial thereof shall not in any manner absolve the Concessionaire or its Contractors from any liability or obligation under this Agreement.

5.3 Obligations relating to Change in Ownership

5.3.1 The Concessionaire shall not undertake or permit any Change in Ownership, except with the prior written approval of the Authority.

5.3.2 Notwithstanding anything to the contrary contained in this Agreement, the Concessionaire agrees and acknowledges that:

(a) all acquisitions of Equity by an acquirer, either by himself or with any person acting in concert, directly or indirectly, including by transfer of the direct or indirect legal or beneficial ownership or control of any Equity, in aggregate of 25% (twenty five per cent) or more of the total Equity of the Concessionaire; or

(b) acquisition of any control directly or indirectly of the Board of Directors of the Concessionaire by any person either by himself or together with any person or persons acting in concert with him, shall constitute a Change in Ownership requiring prior approval of the Authority from national security and public interest perspective, the decision of the Authority in this behalf being final, conclusive and binding on the Concessionaire, and undertakes that it shall not give effect to any such acquisition of Equity or control of the Board of Directors of the Concessionaire without such prior approval of the Authority. For the avoidance of doubt, it is expressly agreed that approval of the Authority hereunder shall be limited to national security and public interest perspective, and the Authority shall endeavor to convey its decision thereon expeditiously. It is also agreed that the Authority shall not be liable in any manner on account of grant or otherwise of such approval and that such approval or denial thereof shall not in any manner absolve the Concessionaire from any liability or obligation under this Agreement.

For the purposes of this Clause 5.3.2:

(i) the expression "acquirer", "control" and "person acting in concert" shall have the meaning ascribed thereto in the Securities and Exchange Board of India (Substantial Acquisition of Shares and Takeover) Regulations, 2011 or any statutory re-enactment thereof as in force as on the date of acquisition of Equity, or the control of the Board of Directors, as the case may be, of the Concessionaire;

(ii) the indirect transfer or control of legal or beneficial ownership of Equity or control of the indirect transfer of the direct or indirect beneficial ownership or control of any company or

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29 Aug 2014 20:06:49

companies whether in India or abroad which results in the acquirer acquiring control over the shares or voting rights of shares of the Concessionaire; and

(iii) power to appoint, whether by contract or by virtue of control or acquisition of shares of any company holding directly or through one or more companies (whether situate in India or abroad) the Equity of the Concessionaire, not less than half of the directors on the Board of Directors of the Concessionaire or of any company, directly or indirectly whether situate in India or abroad, having ultimate control of 25% (twenty five per cent) or more of the Equity of the Concessionaire shall constitute acquisition of control, directly or indirectly, of the Board of Directors of the Concessionaire.

5.4 Obligations relating to employment of foreign nationals

The Concessionaire acknowledges, agrees and undertakes that employment of foreign personnel by the Concessionaire and/or its contractors and their subcontractors shall be subject to grant of requisite regulatory permits and approvals including employment/residential visas and work permits, if any required, and the obligation to apply for and obtain the same shall and will always be of the Concessionaire and, notwithstanding anything to the contrary contained in this Agreement, refusal of or inability to obtain any such permits and approvals by the Concessionaire or any of its contractors or sub-contractors shall not constitute Force Majeure Event, and shall not in any manner excuse the Concessionaire from the performance and discharge of its obligations and liabilities under this Agreement.

5.5 Obligations relating to employment of trained personnel

The Concessionaire shall ensure that the personnel engaged by it in the performance of its obligations under this Agreement are at all times properly trained for their respective function

5.6 Facilities for differently abled and elderly persons

The Concessionaire shall, in conformity with the guidelines issued from time to time by the Ministry of Social Justice and Empowerment, or a substitute thereof, procure a barrier free environment for the differently abled and for elderly persons using the Project.

5.7 Branding of Project

The Project or any part thereof shall not be branded in any manner to advertise, display or reflect the name or identity of the Concessionaire or its shareholders. The Concessionaire undertakes that it shall not, in any manner, use the name or entity of the Project to advertise or display its own identity, brand equity or business interests, including those of its shareholders, save and except as may be necessary in the normal course of business. For the avoidance of doubt, it is agreed that the Concessionaire may display its own name at a spot where other public notices are displayed for the Users. It is further agreed that the Project shall be known, promoted, displayed and advertised by the name of 4-laning of Shahganj bypass end to Badi (Package-IV).

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS32307130516179(Pradeep
Signature Not Verified
Digitally Signed,
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

5.8 Sole purpose of the Concessionaire

The Concessionaire having been set up for the sole purpose of exercising the rights and observing and performing its obligations and liabilities under this Agreement, the

Concessionaire or any of its subsidiaries shall not, except with the previous written consent of the Authority, be or become directly or indirectly engaged, concerned or interested in any business other than as envisaged herein.

5.9 Obligations relating to Local Content

The Concessionaire [Class I Local Supplier/ Class II Local Supplier/ Non Local Supplier] undertakes to ensure minimum Local Content in the Project Highway of at least [50%/20%] duly complying with the provisions of Department for Promotion of Industry and Internal Trade, Ministry of Commerce and Industry, Government of India Order No. P-45021/2/2017-PP (BE- II) dated September 16, 2020, as amended or modified till Bid Due Date and the provisions under Rule 144(xi) of GFR, 2017.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 6

OBLIGATIONS OF THE AUTHORITY

6.1 Obligations of the Authority

6.1.1 The Authority shall, at its own cost and expense undertake, comply with and perform all its obligations set out in this Agreement or arising hereunder.

6.1.2 The Authority agrees to provide support to the Concessionaire and undertakes to observe, comply with and perform, subject to and in accordance with the provisions of this Agreement and Applicable Laws, the following

(a) upon written request from the Concessionaire, and subject to the Concessionaire complying with Applicable Laws, provide reasonable support and assistance to the Concessionaire in procuring Applicable Permits required from any Government Instrumentality for implementation and operation of the Project;

(b) upon written request from the Concessionaire, provide reasonable assistance to the Concessionaire in obtaining access to all necessary infrastructure facilities and utilities, including water and electricity at rates and on terms no less favorable to the Concessionaire than those generally available to commercial customers receiving substantially equivalent services;

(c) procure that no barriers are erected or placed on or about the Project by any Government Instrumentality or persons claiming through or under it, except for reasons of Emergency, national security or law and order;

(d) Deleted

(e) Subject to and in accordance with Applicable Laws, grant to the Concessionaire the authority to regulate use of the Project;

(f) Assist the Concessionaire in procuring police assistance for regulation of Users, removal of trespassers and security on or at the Project;

(g) Not do or omit to do any act, deed or thing which may in any manner is violating of any of the provisions of this Agreement;

(h) support, cooperate with and facilitate the Concessionaire in the implementation and operation of the Project in accordance with the provisions of this Agreement;

(i) upon written request from the Concessionaire and subject to the provisions of Clause 5.4, provide reasonable assistance to the Concessionaire and any expatriate personnel of the Concessionaire or its Contractors to obtain applicable visas and work permits for discharging their respective obligations under this Agreement and the Project Agreements;

(j) undertake rehabilitation and resettlement of persons affected by construction of the Project and bear all costs and expense in respect thereof, save and except as otherwise provided in this Agreement; and

(k) subject to the Concessionaire complying with Applicable Laws, provide reasonable support and assistance to the Concessionaire in procuring approvals, other than

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

approval of the General Approval Drawings of the Railway authorities for construction of such road over bridges/under bridges.

6.2 Maintenance obligations prior to Appointed Date

6.2.1 During the Development Period, the Concessionaire shall maintain the existing Project Highway, in such a manner so as to ensure that the road is in pothole free condition and also to ensure that the quality of service and safety are maintained and in the event of any material deterioration or damage other than normal wear and tear, the Concessionaire shall undertake repair thereof. It is deemed that the Concessionaire has made necessary provisions for inclusion of costs related to maintenance during the Development Period in its Bid. Provided that in case Appointed Date is not achieved and the Concession Agreement is terminated prior to achievement of Appointed Date, the Concessionaire shall be reimbursed the cost of maintenance during Development Period by the Authority after due certification by the Authorized Representative of the Authority. For the purpose of such reimbursement, the lump sum per kilometer rate of reimbursement for a period of 1 (one) year would be Rs. 3.77 lakh (Rs. Three lakh and seventy seven thousand only) and shall be paid on a pro-rata basis for the period concerned. For the avoidance of doubt, the Concessionaire would be reimbursed the cost of maintenance only in case of termination prior to Appointed Date and only if it maintains the Project as envisaged in this Clause 6.2.1.

6.2.2 In case of failure of the Concessionaire to undertake maintenance or repair of the Project, the Authority shall undertake maintenance or repair of the Project Highway at the cost and expense of the Concessionaire and recover the said cost as determined by the Independent Engineer from the Bid Security or the Performance security, as the case may be, submitted by the Concessionaire. For the avoidance of doubt, the Concessionaire shall undertake repairs only for ensuring safe operation of the Project Highway and in the event of excessive deterioration or damage caused due to unforeseen events such as floods or torrential rain the Authority shall undertake special repairs at its own cost and expense.

6.2.3 During the Development Period, the Concessionaire shall protect the Project Highway from any and all occupations, encroachments or Encumbrances, and shall not place or create nor permit any Contractor or other person claiming through or under the Concessionaire to place or create any Encumbrance or security interest over all or any part of the Project Highway or under this Agreement, save and except as otherwise expressly set forth in this Agreement. Further, the Concessionaire shall perform its obligations in a manner that two existing lanes of the Project Highway or an alternative thereof are open to traffic at all times during the Development Period.

6.3 Obligations relating to refinancing

Upon request made by the Concessionaire to this effect, the Authority shall, in conformity with any regulations or guidelines that may be notified by the Government or the Reserve Bank of India, as the case may be, permit and enable the Concessionaire to secure refinancing on such terms as may be agreed upon between the Concessionaire and the entity providing such refinancing; provided, however, that the refinancing [illegible] shall be subject to the prior consent of the Authority, which consent shall not be unreasonably withheld. The Authority shall endeavor to convey its decision on such request of the Concessionaire within 30 days of receipt of the proposal by the Authority.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name:PROXKey v3.0 WD05611496(WD PROXKey)
Date:29-Aug-2024 20:06:49

ARTICLE 7

REPRESENTATIONS AND WARRANTIES

7.1 Representations and warranties of the Concessionaire

The Concessionaire represents and warrants to the Authority that:

(a) It is duly organized and validly existing under the laws of India, and has full power and authority to execute and perform its obligations under this Agreement and to carry out the transactions contemplated hereby;

(b) it has taken all necessary corporate and other actions under Applicable Laws to authorise the execution and delivery of this Agreement and to validly exercise its rights and perform its obligations under this Agreement;

(c) {the selected bidder/ Consortium Members and its/their} Associates have the financial standing and resources to fund the required Equity and to raise the debt necessary for undertaking and implementing the Project in accordance with this Agreement;

(d) this Agreement constitutes its legal, valid and binding obligation, enforceable against it in accordance with the terms hereof, and its obligations under this Agreement -will be legally valid, binding and enforceable obligations against it in accordance with the terms hereof;

(e) it is subject to the laws of India, and hereby expressly and irrevocably waives any immunity in any jurisdiction in respect of this Agreement or matters arising hereunder including any obligation, liability or responsibility hereunder;

(f) The information furnished in the Bid and as updated on or before the date of this Agreement is true and accurate in all respects as on the date of this Agreement;

(g) the execution, delivery and performance of this Agreement will not conflict with, result in the breach of, constitute a default under, or accelerate performance required by any of the terms of its Memorandum and Articles of Association {or those of any member of the Consortium} or any Applicable Laws or any covenant, contract, agreement, arrangement, understanding, decree or order to which it is a party or by which it or any of its properties or assets is bound or affected;

(h) there are no actions, suits, proceedings, or investigations pending or, to its knowledge, threatened against it at law or in equity before any court or before any other judicial, quasi-judicial or other authority, the outcome of which may result in the breach of this Agreement or which individually or in the aggregate may result in any material impairment of its ability to perform any of its obligations under this Agreement;

(i) it has no knowledge of any violation or default with respect to any order, writ, injunction or decree of any court or Government Instrumentality which may result in any material adverse effect on its ability to perform its obligations under this Agreement and no fact or circumstance exists which may give rise to such

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

proceedings that would adversely affect the performance of its obligations under this Agreement;

(j) it has complied with Applicable Laws in all material respects and has not been subject to any fines, penalties, injunctive relief or any other civil or criminal liabilities which in the aggregate have or may have a material adverse effect on its ability to perform its obligations under this Agreement;

(k) it shall at no time undertake or permit any Change in Ownership except in accordance with the provisions of Clause 5.3 and that the {selected bidder/ Consortium Members}, together with {its/ their} Associates, hold not less than 51% (fifty-one percent) of its issued and paid up Equity as on the date of this Agreement; and that each Consortium Member whose technical and financial capacity was evaluated for the purposes of pre-qualification and short-listing in response to the Request for Proposals shall hold at least 26% (twenty six per cent) of Equity during the Construction Period and six months thereafter along with its Associates;

Provided further that any such request made under Clause 7.1(k) and / or Article 42, at the option of the Authority, may be required to be accompanied by a suitable no objection letter from Senior Lenders

(l) {the selected bidder/ each Consortium Member} is duly organized and validly existing under the laws of the jurisdiction of its incorporation or registration, as the case may be, and has requested the Authority to enter into this Agreement with {itself/the Concessionaire} pursuant to the Letter of Award, and has agreed to and unconditionally accepted the terms and conditions set forth in this Agreement;

(m) all its rights and interests in the Project shall pass to and vest in the Authority on the Transfer Date free and clear of all liens, claims and Encumbrances, without any further act or deed on its part or that of the Authority, and that none of the Project Assets shall be acquired by it Subject to any agreement under which a security interest or other lien or Encumbrance is retained by any person, save and except as expressly provided in this Agreement;

(n) no representation or warranty by it contained herein or in any other document furnished by it to the Authority or to any Government Instrumentality in relation to Applicable Permits contains or will contain any untrue or misleading statement of material fact or omits or will omit to state a material fact necessary to make such representation or warranty not misleading;

(o) no sums, in cash or kind, have been paid or will be paid, by it or on its behalf, to any person by way of fees, commission or otherwise for securing the Concession or entering into this Agreement or for influencing or attempting to influence any officer or employee of the Authority in connection therewith;

(p) all information provided by the {selected bidder/ Consortium Members} in response to the Request for Proposals or otherwise, is to the best of its knowledge and belief, true and accurate in all material respects; and

(q) All undertakings and obligations of the Concessionaire arising from the Request for Proposals or otherwise shall be binding on the Concessionaire as if they were part of this Agreement.

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed by Request
Name: PROXKey V 3.0-WBD056114196(MD)(PROXKey)
Date: 29-Aug-2024 20:06:49

7.2 Representations and warranties of the Authority

The Authority represents and warrants to the Concessionaire that:

(a) it has full power and authority to execute, deliver and perform its obligations under this Agreement and to carry out the transactions contemplated herein and that it has taken all actions necessary to execute this Agreement, exercise its rights and perform its obligations, under this Agreement;

(b) It has taken all necessary actions under Applicable Laws to authorize the execution, delivery and performance of this Agreement;

(c) It has the financial standing and capacity to perform its obligations under this Agreement;

(d) This Agreement constitutes a legal, valid and binding obligation enforceable against it in accordance with the terms hereof;

(e) it has no knowledge of any violation or default with respect to any order, writ, injunction or any decree of any court or any legally binding order of any Government Instrumentality which may result in any material adverse effect on the Authority's ability to perform its obligations under this Agreement;

(f) It has complied with Applicable Laws in all material respects;

(g) It has the right, power and authority to manage and operate the Project; and

(h) It shall procure good and valid right to the Site, and has power and authority to grant a license in respect thereto to the Concessionaire.

7.3 Disclosure

In the event that any occurrence or circumstance comes to the attention of either Party that renders any of its aforesaid representations or warranties untrue or incorrect, such Party shall immediately notify the other Party of the same. Such notification shall not have the effect of remedying any breach of the representation or warranty that has been found to be untrue or incorrect nor shall it adversely affect or waive any right, remedy or obligation of either Party under this Agreement.

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed,
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 8

DISCLAIMER

8.1 Disclaimer

8.1.1 The Concessionaire acknowledges that prior to the execution of this Agreement, the Concessionaire has, after a complete and careful examination, made an independent evaluation of the Request for Proposals, Scope of the Project, Specifications and Standards, Site, existing structures, local conditions, physical qualities of ground, subsoil and geology, and all information provided by the Authority or obtained, procured or gathered otherwise, and has determined to its satisfaction the accuracy or otherwise thereof and the nature and extent of difficulties, risks and hazards as are likely to arise or may be faced by it in the course of performance of its obligations hereunder. The Authority makes no representation whatsoever, express, implicit or otherwise, regarding the accuracy, adequacy, correctness, reliability and/or completeness of any assessment, assumptions, statement or information provided by it and the Concessionaire confirms that it shall have no claim whatsoever against the Authority in this regard.

8.1.2 The Concessionaire acknowledges and hereby accepts the risk of inadequacy, mistake or error in or relating to any of the matters set forth in Clause 8.1.1 above and hereby acknowledges and agrees that the Authority shall not be liable for the same in any manner whatsoever to the Concessionaire, {the Consortium Members and their} Associates or any person claiming through or under any of them.

8.1.3 The Parties agree that any mistake or error in or relating to any of the matters set forth in Clause 8.1.1 above shall not vitiate this Agreement, or render it voidable.

8.1.4 In the event that either Party becomes aware of any mistake or error relating to any of the matters set forth in Clause 8.1.1 above, that Party shall immediately notify the other Party, specifying the mistake or error; provided, however, that a failure on part of the Authority to give any notice pursuant to this Clause 8.1.4 shall not prejudice the disclaimer of the Authority contained in Clause 8.1.1 and shall not in any manner shift to the Authority any risks assumed by the Concessionaire pursuant to this Agreement.

8.1.5 Except as otherwise provided in this Agreement, all risks relating to the Project shall be borne by the Concessionaire and the Authority shall not be liable in any manner for such risks or the consequences thereof.

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed,
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Part III

Development and Operations

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 9

PERFORMANCE SECURITY

9.1 Performance Security

9.1.1 The Concessionaire shall, for the performance of its obligations hereunder, provide to the Authority no later than 30 (thirty) days from the date of this Agreement, an Insurance Surety Bond (issued by Insurance Company authorized by Insurance Regulatory and Development Authority of India in the form set forth in Annexure II of Schedule-F), Account Payee Demand Draft, Banker's Cheque or irrevocable and unconditional e-Bank Guarantee from a Bank for a sum equivalent to Rs. 15.57 Crore (Rupees Fifteen Crore and Fifty Seven Lakh Only) in the form set forth in Schedule-F (the **"Performance Security").** Until such time the Performance Security is provided by the Concessionaire pursuant hereto and the same comes into effect, the Bid Security shall remain in force and effect, and upon such provision of the Performance Security pursuant hereto, the Authority shall release the Bid Security to the Concessionaire.

9.1.2 Notwithstanding anything to the contrary contained in this Agreement, in the event Performance Security is not provided by the Concessionaire within a period of 30(thirty) days from the date of this Agreement, the Authority may encash the Bid Security and appropriate the proceeds thereof as Damages, and thereupon all rights, privileges, claims and entitlements of the Concessionaire under or arising out of this Agreement shall be deemed to have been waived by, and to have ceased with the concurrence of the Concessionaire, and this Agreement shall be deemed to have been terminated by mutual agreement of the Parties.

9.2 Appropriation of Performance Security

Upon occurrence of a Concessionaire Default or failure to meet any Condition Precedent, the Authority shall, without prejudice to its other rights and remedies hereunder or in law, be entitled to encash and appropriate from the Performance Security the amounts due to it for and in respect of such Concessionaire Default or for failure to meet any Condition Precedent. Upon such encashment and appropriation from the Performance Security, the Concessionaire shall, within 15 (fifteen) days thereof, replenish, in case of partial appropriation, to the original level of the Performance Security, and in case of appropriation of the entire Performance Security provide a fresh Performance Security, as the case may be, failing which the Authority shall be entitled to terminate this Agreement in accordance with Article 31.

Provided that upon appropriation on account of Concessionaire's Default the Concessionaire shall replenish the Performance Security and upon such replenishment or furnishing of a fresh Performance Security, as the case may be, the Concessionaire shall be entitled to an additional Cure Period of 120 (one hundred and twenty) days for remedying the Concessionaire Default, save and except as provided in Clause 4.5 of this Agreement, and in the event of the Concessionaire not curing its default within such Cure Period, the Authority shall be entitled to encash and appropriate such Performance Security as Damages, and to terminate this Agreement in accordance with Article 31.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS230713051619(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

9.3 Release of Performance Security

The Performance Security shall remain in force and effect for a period of one year from the Appointed Date, but shall be released earlier upon the Concessionaire expending on Project construction an aggregate sum that is not less than 30% (thirty per cent) of the Bid Project Cost; provided, however, that the Performance Security shall not be released and shall be kept alive by the Concessionaire if the Concessionaire is in breach of this Agreement. Upon request made by the Concessionaire for release of the Performance Security along with the particulars which establish satisfaction of the requirements specified in this Clause 9.3, the Authority shall release the Performance Security forthwith.

9.4 Deleted

9.5 Deleted

9.6 References to Performance Security

References to Performance Security occurring in this Agreement for and in respect of any period prior to the delivery of the Performance Security by the Concessionaire to the Authority, or in respect of any period subsequent to the expiry or release thereof, as the case may be, shall be construed solely for the purposes of calculating the amount of Damages payable by the Concessionaire.

9.7 Additional Performance Security

The Concessionaire shall alongwith the Performance Security provide to the Authority an Insurance Surety Bond (issued by Insurance Company authorized by Insurance Regulatory and Development Authority of India), Account Payee Demand Draft, Banker's Cheque or irrevocable and unconditional e-Bank Guarantee from a Bank for a sum equivalent to Rs. 8.925 crore (Rupees Eight crore ninety two lakh and fifty thousand only) in the form set forth in Schedule-F (the "Additional Performance Security"), to be modified, mutatis mutandis, for this purpose as security to the Authority if the Bid Project Cost of the Selected Bidder is lower by more than 10% with respect to the Estimated Project Cost. The requirement of submitting the Additional Performance Security shall be a Condition Precedent. Failure to maintain the Additional Performance Security shall be treated as Concessionaire Default as per Clause 31.1.1.

9.8 Appropriation and Release of Additional Performance Security

Notwithstanding anything contrary contained in this Agreement, if this Agreement is terminated, except for Authority Default or due to the Force Majeure, prior to achievement of the III (third) Project Milestone, the Authority shall have the right to encash the Additional Performance Security in addition to the Performance Security. However, the Additional Performance Security shall be released upon achievement of Project Milestone – III as defined in Schedule G and shall be released immediately and no later than 30 (thirty) days from the certification of achievement of Project Milestone- III.

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619(Pradeep

Signature Not Verified
Digitally Signed,
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 10

RIGHT OF WAY

10.1 The Site

The site of the Project shall comprise the real estate described in Schedule-A and in respect of which the Right of Way shall be provided and granted by the Authority to the Concessionaire as a licensee under and in accordance with this Agreement (**the "Site"**). For the avoidance of doubt, it is hereby acknowledged and agreed that references to the Site shall be construed as references to the real estate required for the Project as set forth in Schedule-A.

10.2 License, Access and Right of Way

10.2.1 The Authority hereby grants to the Concessionaire access to the Site for carrying out any surveys, investigations and soil tests that the Concessionaire may deem necessary during the Development Period, it being expressly agreed and understood that the Authority shall have no liability whatsoever in respect of survey, investigations and tests carried out or work undertaken by the Concessionaire on or about the Site pursuant hereto in the event of Termination or otherwise.

10.2.2 In consideration of the Project, this Agreement and the covenants and warranties on the part of the Concessionaire herein contained, the Authority, in accordance with the terms and conditions set forth herein, hereby grants to the Concessionaire, commencing from the Appointed Date, leave and license rights in respect of all the land (along with any buildings, constructions or immovable assets, if any, thereon) comprising the Site which is described, delineated and shown in Schedule-A hereto (the **"Licensed Premises"**), on an "as is where is" basis, free of any Encumbrances, to develop, operate and maintain the said Licensed Premises, together with all and singular rights, liberties, privileges, easements and appurtenances whatsoever to the said Licensed Premises, here ditaments or premises or any part thereof belonging to or in any way appurtenant thereto or enjoyed therewith, for the duration of the Concession Period and, for the purposes permitted under this Agreement, and for no other purpose whatsoever.

10.2.3 The license, access and right of way granted by this Agreement to the Concessionaire shall always be subject to existing rights of way and the Concessionaire shall perform its obligations in a manner that two existing lanes of the Project Highway or an alternative thereof are open to traffic at all times during the Construction Period.

10.2.4 It is expressly agreed that the license granted hereunder shall terminate automatically and forthwith, without the need for any action to be taken by the Authority to terminate the license, upon the Termination of this Agreement for any reason whatsoever. For the avoidance of doubt, the Parties expressly agree that notwithstanding any temporary or permanent structures erected on the Site by the Concessionaire or its sub-licensees, the license in respect of the Site shall automatically terminate, without any further act of the Parties, upon Termination of this Agreement.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS230713051619(Pradeep

10.2.5 The Concessionaire hereby irrevocably appoints the Authority (acting through a nominee) to be its true and lawful attorney, to execute and sign in the name of the Concessionaire a transfer or surrender of the license granted hereunder at any time after the Concession Period has expired or has been terminated earlier in terms hereof, a sufficient

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-SWD05811496(WD PROXKey)
Date: 29 Aug 2024 20:06:49

proof of which will be the declaration of any duly authorized officer of the Authority, and the Concessionaire consents to it being registered for this purpose.

10.2.6 It is expressly agreed that trees on the Site are property of the Authority except that the Concessionaire shall be entitled to exercise usufructuary rights thereon during the Concession Period.

10.3 Procurement of the Site

10.3.1 Pursuant to the notice specified in Clause 4.1.2, the Authority Representative and the Concessionaire shall, on a mutually agreed date and time, inspect the Site and prepare a memorandum containing an inventory of the Site including the vacant and unencumbered land, buildings, structures, road works, trees and any other immovable property on or attached to the Site. Such memorandum shall have appended thereto an appendix (the **"Appendix"**) specifying in reasonable detail those parts of the Site to which vacant access and Right of Way has not been granted to the Concessionaire. Signing of the memorandum, in 2 (two) counterparts (each of which shall constitute an original), by the authorized representatives of the Parties shall, subject to the provisions of Clause 10.2.2, be deemed to constitute a valid license and Right of Way to the Concessionaire for free and unrestricted use and development of the vacant and unencumbered Site during the Concession Period under and in accordance with the provisions of this Agreement and for no other purpose whatsoever. For the avoidance of doubt, it is agreed that valid license and Right of Way with respect to the parts of the Site as set forth in the Appendix shall be deemed to have been granted to the Concessionaire upon vacant access thereto being provided by the Authority to the Concessionaire.

10.3.2 Without prejudice to the provisions of Clause 10.3.1, the Parties hereto agree that on or prior to the Appointed Date, the Authority shall have granted vacant access and Right of Way such that the Appendix shall not include land which shall in any manner prevent the Concessionaire from undertaking construction of the Project to the extent of at least 80% (eighty per cent) of the length thereof, and in the event Financial Close is delayed on account of delay in grant of such vacant access and Right of Way, the Authority shall be liable to payment of Damages solely under the provisions of Clause 4.2. For the avoidance of doubt, the Authority acknowledges and agrees that the Appendix shall not include any land which may prevent the construction of any critical element of the Project without which the Completion Certificate or Provisional Certificate may not be granted. The Authority further acknowledges and agrees that prior to the Appointed Date, it shall have procured issuance of the statutory notification under Applicable Laws for vesting of all land comprising the Project in the Government and has taken possession of at least 80% (eighty per cent) of the length thereof, save and except stray plots of land which the Parties mutually agree to exclude from such vesting prior to the Appointed Date. The Parties also acknowledge and agree that the conditions specified in this Clause 10.3.2 shall not be modified or waived by either Party.

10.3.3 On and after signing the memorandum referred to in Clause 10.3.1, and until the Transfer Date, the Concessionaire shall maintain a round-the-clock vigil over the Site and shall ensure and procure that no encroachment thereon takes place, and in the event of any encroachment or occupation on any part thereof, the Concessionaire shall remove such encroachment or occupation forthwith to the Authority and undertake its removal at its cost and expenses.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS230713051619(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey V 3.0-WB050114961(WD PROXKey)
Date: 29-Aug-2024 20:06:49

10.3.4 The Authority shall make best efforts to procure and grant, no later than 90 (ninety) days from the Appointed Date, the Right of Way to the Concessionaire in respect of all land included in the Appendix, and in the event of delay for any reason other than Force Majeure or breach of this Agreement by the Concessionaire, it shall pay to the Concessionaire Damages in a sum calculated at the rate of Re. 1 (Rupee one) per day for every 10 (ten) square meters or part thereof, commencing from the 91st (ninety first) day of the Appointed Date and until such Right of Way is procured or 180 (one hundred and eighty) days from the Appointed Date whichever is earlier. The Damages payable in terms of this clause shall be the sole remedy available to the Concessionaire and the Authority shall not be liable for any consequential loss or damage to the Concessionaire. In the event, the Authority is unable to provide the remaining Site within 180 (one hundred and eighty days) from the Appointed Date, the remaining Site of the Project Highway shall be removed from the scope of the work under the provision of Change of Scope.

10.3.5 Upon receiving Right of Way in respect of any land included in the Appendix, the Concessionaire shall complete the Construction Works thereon within a reasonable period to be determined by the Independent Engineer in accordance with Good Industry Practice; provided that the issue of Provisional Certificate shall not be affected or delayed on account of vacant access to any part of the Site not being granted to the Concessionaire or any construction on such part of the Site remaining incomplete on the date of Tests on account of the delay or denial of such access thereto. For the avoidance of doubt, it is expressly agreed that Construction Works on all lands for which Right of Way is granted within 146 (one hundred and forty six) days of the Appointed Date shall be completed on or before the Scheduled Completion Date. It is further agreed that the obligation of the Concessionaire to complete the affected Construction Works shall subsist so long as the Authority continues to pay the Damages specified herein, and upon the Authority ceasing to pay such Damages after giving 60 (sixty) days' notice thereof to the Concessionaire, the obligation of the Concessionaire to complete such works on such part of the Site shall cease forthwith. It is also expressly agreed that completion of the respective Construction Works within the time determined by the Independent Engineer hereunder shall be deemed to be Project Milestones for the purposes of levy and recovery of Damages under and in accordance with the provisions of Clause 12.3.2.

10.3.6 The Authority shall procure the additional land required for construction of works specified in Change of Scope Order issued under Article 16, in accordance with the provisions of this Agreement, and upon procurement thereof, such land shall form part of the Site. In case of any additional land required for Toll Plazas, Traffic Aid Posts, Medical Aid Posts, under passes and over passes or for construction of works specified in Change of Scope Order issued under Article 16, in accordance with this Agreement and upon procurement, such land shall form part of the Site; provided also that the land to be acquired by the Authority hereunder as a part of the Site shall be deemed to be included in the Appendix referred to in this Clause 10.3 and dealt with in accordance with the provisions thereof. For the avoidance of doubt, it is agreed that the minimum area of land to be acquired for the Toll Plaza and approach roads thereof shall conform to the provisions of Schedule - B and Schedule - C.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep

10.3.7 The Parties expressly agree that the obligation to provide land for 80% (eighty per cent) of the Site shall mean and imply provision of land that shall enable the Concessionaire to undertake construction on at least 80% (eighty per cent) of the length of the Project

Signature Not Verified
Digitally Signed.
Name: PROXKey v3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

10.4 Site to be free from Encumbrances

Subject to the provisions of Clause 10.3, the Site shall be made available by the Authority to the Concessionaire pursuant hereto free from all Encumbrances and occupations and without the Concessionaire being required to make any payment to the Authority on account of any costs, compensation, expenses and charges for the acquisition and use of such Site for the duration of the Concession Period, except insofar as otherwise expressly provided in this Agreement. For the avoidance of doubt, it is agreed that existing rights of way, easements, privileges, liberties and appurtenances to the Licensed Premises shall not be deemed to be Encumbrances. It is further agreed that the Concessionaire accepts and undertakes to bear any and all risks arising out of the inadequacy or physical condition of the Site.

10.5 Protection of Site from Encumbrances

During the Concession Period, the Concessionaire shall protect the Site from any and all occupations, encroachments or Encumbrances, and shall not place or create nor permit any Contractor or other person claiming through or under the Concessionaire to place or create any Encumbrance or security interest over all or any part of the Site or the Project Assets, or on any rights of the Concessionaire therein or under this Agreement, save and except as otherwise expressly set forth in this Agreement.

10.6 Special/temporary right of way

The Concessionaire shall bear all costs and charges for any special or temporary right of way required by it in connection with access to the Site. The Concessionaire shall obtain at its cost such facilities on or outside the Site as may be required by it for the purposes of the Project and the performance of its obligations under this Agreement.

10.7 Access to the Authority and Independent Engineer

The license, right of way and right to the Site granted to the Concessionaire hereunder shall always be subject to the right of access of the Authority and the Independent Engineer and their employees and agents for inspection, viewing and exercise of their rights and performance of their obligations under this Agreement.

10.8 Geological and archaeological finds

It is expressly agreed that mining, geological or archaeological rights do not form part of the license granted to the Concessionaire under this Agreement and the Concessionaire hereby acknowledges that it shall not have any mining rights or interest in the underlying minerals, fossils, antiquities, structures or other remnants or things either of particular geological or archaeological interest and that such rights, interest and property on or under the Site shall vest in and belong to the Authority or the concerned Government Instrumentality. The Concessionaire shall take all reasonable precautions to prevent its workmen or any other person from removing or damaging such interest or property and shall inform the Authority forthwith of the discovery thereof and comply with such instructions as the Authority or the concerned Government Instrumentality may give for the removal of such property. For the avoidance of doubt, it is agreed that any reasonable expenses incurred by the Concessionaire hereunder shall be reimbursed by the Authority. It is also agreed that the Authority shall procure that the instructions hereunder are issued by the concerned Government - Instrumentality within a reasonable period so as

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0 WD05611496(WD PROXKey)
Date: 29-Aug-2014 20:06:49

to enable the Concessionaire to continue its Construction Works with such modifications as may be deemed necessary.

10.9 Land for wayside amenities

10.9.1 The additional land earmarked for this purpose in Schedule-A shall be utilized by the Concessionaire for provision of wayside amenities which may include public toilets, rest areas, cafeteria, motels, medical facilities and other facilities or amenities for Users of the Project Highway.

10.9.2 The Concessionaire may procure additional land at its own cost and expense for construction and operation of additional facilities and the Authority shall have no obligation or liability in respect thereof. For the avoidance of doubt, the Parties agree that any land acquired by the Concessionaire under this Clause shall be retained by it after the Transfer Date and the Authority shall have no right or lien on such land at any time during or after the Concession Period. The Parties further agree that the Concessionaire shall seek prior consent of the Authority to connect any Additional Facility to the Project and such consent shall not be unreasonably withheld.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 11

UTILITIES, ASSOCIATED ROADS AND TREES

11.1 Existing utilities and roads

Notwithstanding anything to the contrary contained herein, the Concessionaire shall ensure that the respective entities owning the existing roads, right of way or utilities on, under or above the Site are enabled by it to keep such utilities in continuous satisfactory use, if necessary, by providing suitable temporary or permanent diversions with the authority of the controlling body of that road, right of way or utility, and the Authority shall, upon written request from the Concessionaire, initiate and undertake at the Concessionaire's cost, legal proceedings for acquisition of any right of way necessary for such diversion.

11.2 Shifting of obstructing utilities

11.2.1 The Concessionaire shall, subject to Applicable Laws and with assistance of the Authority, undertake shifting of any utility (including electric lines, water pipes and telephone cables), to an appropriate location or alignment, if such utility or obstruction adversely affects the execution of Works or maintenance of the Project Highway in accordance with this Agreement, as per the scope given in Schedule B and in accordance with applicable standards and specifications of concerned utility owning entity. The cost of shifting of such, utilities indicated in Schedule-B is payable to the Concessionaire as part of Bid Project Cost. Cost of shifting utilities not included in the Schedule B, if any, shall be treated as Change of Scope. The Authority will provide assistance to the Concessionaire for obtaining the estimates for shifting of such utilities from the entity owning such electric lines, water pipes or telephone cables, as the case may be. The Concessionaire shall execute such utility shifting works under the supervision of utility owning agency and Independent Engineer (IE) in accordance with the provision of Agreement. The supervision charges only shall be paid by the Authority to the Utility Owning Entity. In the event of any delay in shifting thereof, the Concessionaire shall be responsible for failure to perform any of its obligations hereunder if such failure is not as a direct consequence of delay on the part of the entity owning such electric lines, water pipes or telephone cables, as the case may be.

The dismantled material/ scrap of existing Utility to be shifted/ dismantled shall belong to the Concessionaire who would be free to dispose-off the dismantled material as deemed fit by them.

The work of shifting of utilities can be taken up by the Concessionaire any time after signing of the Agreement.

11.2.2 In case Appointed Date is not achieved and the Concession Agreement is terminated prior to achievement of Appointed Date, the Concessionaire shall be reimbursed the cost of utility shifting carried out during Development Period by the Authority after due certification by the Authorized Representative of the Authority. For the purpose of such reimbursement, the rates in the approved estimates by the concerned utility department shall be paid as per actual work carried out at site. For the avoidance of doubt, the Concessionaire would be reimbursed the cost of utility shifting only in case of termination prior to Appointed Date and only if it carry out the utility shifting as envisaged in Clause 11.2.1.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey v2.1.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

11.3 New utilities and roads

The Concessionaire shall allow, subject to such conditions as the Authority may specify, access to, and use of the Site for laying telephone lines, water pipes, electric cables or other public utilities. Where such access or use causes any financial loss to the Concessionaire, it may require the user of the Site to pay compensation or damages as per Applicable Laws. For the avoidance of doubt, it is agreed that use of the Site under this Clause 11.3 shall not in any manner relieve the Concessionaire of its obligation to maintain the Project in accordance with this Agreement and any damage caused by such use shall be restored forthwith.

11.4 Felling of trees

The Authority shall assist the Concessionaire in obtaining the Applicable Permits for felling of trees to be identified by the Authority for this purpose if and only if such trees cause a material adverse effect on the construction, operation or maintenance of the Project Highway. The cost of such felling shall be borne by the Authority, and in the event of any delay in felling thereof for reasons beyond the control of the Concessionaire, it shall be excused for failure to perform any of its obligations hereunder if such failure is a direct consequence of delay in the felling of trees. For the avoidance of doubt, the Parties hereto agree that the felled trees shall be deemed to be owned by the Authority and shall be disposed in such manner and subject to such conditions as the Authority may in its sole discretion deem appropriate.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 12

CONSTRUCTION OF THE PROJECT

12.1 Obligations prior to commencement of construction

In addition to its obligations of maintaining the Project Highway during the Development Period, prior to commencement of Construction Works, the Concessionaire shall:

(a) submit to the Authority and the Independent Engineer its detailed design, construction methodology, quality assurance procedures, and the procurement, engineering and construction time schedule for completion of the Project in accordance with the Project Completion Schedule as set forth in Schedule-G;

(b) Appoint its representative duly authorized to deal with the Authority in respect of all matters under or arising out of or relating to this Agreement;

(c) undertake, do and perform all such acts, deeds and things as may be necessary or required before commencement of construction under and in accordance with this Agreement, Applicable Laws and Applicable Permits; and

(d) Make its own arrangements for quarrying and procurement of materials needed for the Project under and in accordance with Applicable Laws and Applicable Permits.

12.2 Drawings

In respect of the Concessionaire's obligations relating to the Drawings of the Project as set forth in Schedule-H, the following shall apply:

(a) The Concessionaire shall prepare and submit, with reasonable promptness and in such sequence as is consistent with the Project Completion Schedule, 3 (three) copies each of all Drawings to the Independent Engineer for review.

(b) By submitting the Drawings for review to the Independent Engineer, the Concessionaire shall be deemed to have represented that it has determined and verified that the design and engineering, including the field construction criteria related thereto, are in conformity with the Scope of the Project, Specifications and Standards, Applicable Laws and Good Industry Practice.

(c) Within 15 (fifteen) days of the receipt of the Drawings, the Independent Engineer shall review the same and convey its observations to the Concessionaire with particular reference to their conformity or otherwise with the Scope of the Project and the Specifications and Standards. The Concessionaire shall not be obliged to await the observations of the Independent Engineer on the Drawings submitted pursuant hereto beyond the said 15 (fifteen) days period and may begin or continue Construction Works at its own discretion and risk.

(d) If the aforesaid observations of the Independent Engineer indicate that the Drawings are not in conformity with the Scope of the Project or the Specifications and Standards, such Drawings shall be revised by the Concessionaire and resubmitted to the Independent Engineer for review. The Independent Engineer shall, within 7 (seven) observations, if any, within 7 (seven) days of receipt of the revised Drawings.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey (v3.0 WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

(e) No review and/or observation of the Independent Engineer and/or its failure to review and/or convey its observations on any Drawings shall relieve the Concessionaire of its obligations and liabilities under this Agreement in any manner nor shall the Independent Engineer or the Authority be liable for the same in any manner.

(f) Without prejudice to the foregoing provisions of this Clause 12.2, the Concessionaire shall submit to the Authority for review and comments, its Drawings relating to alignment of the Project, finished road level and general arrangement drawings of major bridges, flyovers and grade separators, and the Authority shall have the right but not the obligation to undertake such review and provide its comments, if any, within 30 (thirty) days of the receipt of such Drawings. The provisions of this Clause 12.2 shall apply mutatis mutandis to the review and comments hereunder.

(g) Within 90 (ninety) days of COD, the Concessionaire shall furnish to the Authority and the Independent Engineer a complete set of as-built Drawings, in 2 (two) hard copies and in its editable digital format or in such other medium or manner as may be acceptable to the Authority, reflecting the Project as actually designed, engineered and constructed, including an as- built survey illustrating the layout of the Project and setback lines, if any, of the buildings and structures forming part of Project Facilities.

12.3 Construction of the Project

12.3.1 On or after the Appointed Date, the Concessionaire shall undertake construction of the Project as specified in Schedule-B and Schedule-C, and in conformity with the Specifications and Standards set forth in Schedule-D. The 730th (seven hundred and thirtieth) day from the Appointed Date shall be the scheduled date for completion of the Project (the **"Scheduled Completion Date"**) and the Concessionaire agrees and undertakes that the Project shall be completed on or before the Scheduled Completion Date.

12.3.2 The Concessionaire shall construct the Project in accordance with the Project Completion Schedule set forth in Schedule-G. In the event that the Concessionaire fails to achieve any Project Milestone within a period of 90 (ninety) days from the date set forth for such Project Milestone in Schedule-G, unless such failure has occurred due to Force Majeure or for reasons attributable to the Authority, it shall pay Damages to the Authority in a sum calculated at the rate of 0.1% (zero point one per cent) of the amount of Performance Security for delay of each day until such Project Milestone is achieved; provided that if any or all Project Milestones or the Scheduled Completion Date are extended in accordance with the provisions of this Agreement, the dates set forth in Schedule-G shall be deemed to be modified accordingly and the provisions of this Agreement shall apply as if Schedule-G has been amended as above; provided further that in the event COD is achieved on or before the Scheduled Completion Date, the Damages paid under this Clause 12.3.2 shall be refunded by the Authority to the Concessionaire, but without any interest thereon. For the avoidance of doubt, it is agreed that recovery of Damages under this Clause 12.3.2 shall be without prejudice to the rights of the Authority under this Agreement, including the right of Termination thereof.

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516179(Pradeep
Signature Not Verified
Digitally Signed,
Name: PROXKey v3.0 WD0611496(Wb PROXKey)
Date: 29-Aug-2024 20:06:49

12.3.3 In the event that the Project is not completed and COD does not occur within 270 (two hundred and seventy) days from the Scheduled Completion Date, unless such failure has occurred on account of reasons attributable to the Authority or due to Force Majeure, the Concessionaire shall be entitled to terminate this Agreement.

12.4 Maintenance during Construction Period

12.4.1 During the Construction Period, the Concessionaire shall maintain, at its cost, the existing Project Highway to ensure that the road is in pothole free condition is maintained , and shall undertake the necessary repair and maintenance works for this purpose; provided that the Concessionaire may, at its cost, interrupt and divert the Users and other persons if such interruption and diversion is necessary for the efficient progress of Construction Works and conforms to Good Industry Practice; provided further that such interruption and diversion shall be undertaken by the Concessionaire only with the prior written approval of the Independent Engineer which approval shall not be unreasonably withheld. Further, in case the Scheduled Completion Date gets extended due to delay attributable solely to the Authority, the Concessionaire shall be liable to maintain the Project Highway for such extended period and shall be entitled to receive reimbursement of cost of maintenance for such extended period at the rate specified in Clause 6.2.1. For the avoidance of doubt, it is agreed that the Concessionaire shall at all times be responsible for ensuring safe operation of the Project.

12.4.2 In the event of default by the Concessionaire in discharging the obligations specified in Clause 12.4.1, the Authority may levy and recover Damages equal to 0.2% (zero point two per cent) of the Performance Security for each day of default hereunder.

12.4.3 The Parties expressly agree that pursuant to the provisions of Clause 12.4.1, the Concessionaire shall, about 7 (seven) days prior to the date of this Agreement and with prior notice to the Authority and alongwith the Authority's Representative, undertake video recording of the condition and status of the Project, which recording shall be compiled into a 3 (three)-hour digital video disc or any substitute thereof, and shall provide 3 (three) copies of such recording to the Authority within 2 (two) days of the date of this Agreement. The Authority may, in its discretion, undertake another video recording in the presence of the Concessionaire's representative, within 7 (seven) days of the date of this Agreement, and substitute its video recording for the video recording undertaken by the Concessionaire. The Parties further agree that such video recording shall constitute evidence of the status and condition of the Project as on the date of such recording.

12.5 Deleted

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 13

MONITORING OF CONSTRUCTION

13.1 Monthly progress reports

During the Construction Period, the Concessionaire shall, no later than 7 (seven) days after the close of each month, furnish to the Authority and the Independent Engineer a monthly report on physical and financial progress of the Construction Works and shall promptly give such other relevant information as may be required by the Independent Engineer. The Concessionaire shall also submit a detailed report (alongwith each monthly report) indicated the locations and movement of all construction vehicles by way of installing a functional Global Positioning System (GPS) in each vehicle, which shall include, but not limited to, the following information:

i. Real-time location data of each construction vehicle.

ii. Timestamps indicating the start and end time of vehicle movements.

iii. Mileage covered by each vehicle

The Contractor shall be responsible for ensuring the accuracy and integrity of the GPS tracking data.

13.2 Inspection

During the Construction Period, the Independent Engineer shall inspect the Project at least once a month and make a report of such inspection (the **"Inspection Report"**) stating in reasonable detail the defects or deficiencies, if any, with particular reference to the Project Completion Schedule, Scope of the Project and Specifications and Standards. It shall send a copy of the Inspection Report to the Authority and the Concessionaire within 7 (seven) days of such inspection and upon receipt thereof, the Concessionaire shall rectify and remedy the defects or deficiencies, if any, stated in the Inspection Report. Such inspection or submission of Inspection Report by the Independent Engineer shall not relieve or absolve the Concessionaire of its obligations and liabilities hereunder in any manner whatsoever.

13.3 Tests

13.3.1 For determining that the Construction Works conform to the Specifications and Standards, the Independent Engineer shall require the Concessionaire to carry out or cause to be carried out tests, at such time and frequency and in such manner as may be specified by the Independent Engineer from time to time, in accordance with Good Industry Practice for quality assurance. The size of sample for such tests shall, to the extent possible, not exceed 10% (ten per cent) of the quantity and/or number of tests required by Good Industry Practice for the construction works undertaken by the Authority through their contractors. The Concessionaire shall, with due diligence, carry out or cause to be carried out all the tests in accordance with the instructions of the Independent Engineer and furnish the results thereof to the Independent Engineer. One half of the costs incurred on such tests, and to the extent certified by the Independent Engineer as reasonable, shall be reimbursed by the Authority to the Concessionaire. Provided, however, that the Independent Engineer may, instead of carrying out the tests specified hereunder, at its option decide to witness, or participate in, any of the tests to be undertaken by the Concessionaire for its own quality assurance in accordance with Good Industry Practice, and in such an event, the Concessionaire shall cooperate with, and provide the necessary assistance to, the Independent Engineer for discharging its functions hereunder. For the avoidance of doubt,

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey v 3.0-WB0361144967(WB1PROXKey)
Date: 29-Aug-2014 20:06:49

the costs to be incurred on any test which is undertaken for determining the rectification of any defect or deficiency in construction shall be borne solely by the Concessionaire.

13.3.2 In the event that results of any tests conducted under this Clause 13.3 establish any defects or deficiencies in the Construction Works, the Concessionaire shall carry out remedial measures and furnish a report to the Independent Engineer in this behalf. The Independent Engineer shall require the Concessionaire to carry out or cause to be carried out tests to determine that such remedial measures have brought the Construction Works into compliance with the Specifications and Standards, and the procedure set forth in this Clause 13.3 shall be repeated until such Construction Works conform to the Specifications and Standards. For the avoidance of doubt, it is agreed that tests pursuant to this Clause 13.3 shall be undertaken in addition to and independent of the tests that shall be carried out by the Concessionaire for its own quality assurance in accordance with Good Industry Practice. It is also agreed that a copy of the results of such tests shall be sent by the Concessionaire to the Independent Engineer forthwith.

13.4 Delays during construction

Without prejudice to the provisions of Clause 12.3.2, if the Concessionaire does not achieve any of the Project Milestones or the Independent Engineer shall have reasonably determined that the rate of progress of Construction Works is such that the Project is not likely to be completed by the Scheduled Completion Date, it shall notify the Concessionaire to this effect, and the Concessionaire shall, within 15 (fifteen) days of such notice, by a communication inform the Independent Engineer in reasonable detail about the steps it proposes to take to expedite progress and the period within which it shall achieve COD.

13.5 Suspension of unsafe Construction Works

13.5.1 Upon recommendation of the Independent Engineer to this effect, the Authority may by notice require the Concessionaire to suspend forthwith the whole or any part of the Construction Works if, in the reasonable opinion of the Authority, Such work threatens the safety of the Users and pedestrians. Provided, however, that in case of an emergency, the Authority may suo moto issue the notice referred to hereinabove.

13.5.2 The Concessionaire shall, pursuant to the notice under Clause 13.5.1, suspend the Construction Works or any part thereof for such time and in such manner as may be specified by the Authority and thereupon carry out remedial measures to secure the safety of suspended works and the Users. The Concessionaire may by notice require the Independent Engineer to inspect such remedial measures forthwith and make a report to the Authority recommending whether or not the suspension hereunder may be revoked. Upon receiving the recommendations of the Independent Engineer, the Authority shall either revoke such suspension or instruct the Concessionaire to carry out such other and further remedial measures as may be necessary in the reasonable opinion of the Authority, and the procedure set forth in this Clause 13.5 shall be repeated until the suspension hereunder is revoked.

13.5.3 Subject to the provisions of Clause 28.7, all reasonable costs incurred for maintaining and protecting the Construction Works or part thereof during the period of suspension (the **"Preservation Costs"**) shall be borne by the Concessionaire; provided, however, that if the suspension has occurred as a result of any breach of this Agreement by the Authority, the Preservation Costs shall be borne by the Authority.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS230713051619(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WS0611496(MD PROXKey)
Date: 29-Aug-2024 20:06:49

13.5.4 If suspension of Construction Works is for reasons not attributable to the Concessionaire, the Independent Engineer shall determine any extension of the dates set forth in the Project Completion Schedule to which the Concessionaire is reasonably entitled, and shall notify the Authority accordingly whereupon the Authority shall extend such Project Completion Schedule dates in accordance with the recommendations of the Independent Engineer.

13.6 Video recording

The Concessionaire shall carryout video recording of each project every month since award of work till completion of construction and biannually during O&M period.

Authority has finalized specifications/methodology for video recording and identified zone–wise agencies & rates for the same. The Concessionaire may use these agencies so as to ensure uniformity in data collection. Recording shall have to be done in the presence of Team Leader of Independent Engineer. Recording of previous videos and current running side by side shall be loaded on Data Lake (https://datalakeg.nhai.gov.in/nhai) for easily capturing various developments during the month (a sample screenshot is attached herewith and also loaded on Data Lake along with a sample video for guidance) before submission of their invoice. Capturing Ortho-image for approx. 10% equivalent length of critical structures or any other specific area should be decided by the ROs/ PDs and be conveyed to the Drone Agency in the site-specific work order. Independent Engineer shall ensure that the features and quality of drone video is acceptable and video is not distorted/tampered with.

Independent Engineer shall analyse these drone videos and give their comments in its digital MPRs covering inter-alia but not limited to the encumbrances/lands not available, sites of COS demands, progress of project, mobilisation of plant & equipment, mobilisation of camp sites, progress on rectification of NCRs etc. along with the proposed action plan. Project Director of NHAI shall cross-check drone videos during the monthly physical inspections and notify the discrepancies noticed, if any, between drone video, on Independent Engineer comments and ground reality. The discrepancies shall be examined and addressed through joint site inspections.

As per the policy, the Network Survey Vehicle (NSV) survey needs to be carried out twice in a year on completed project. Therefore, PDs should plan biannually drone based video recording during O&M period in such a manner so that there is no overlap and digital data of O&M period is available in regular intervals (quarterly) through NSV and drone videography.

Notwithstanding anything to the contrary contained in this document, the Concessionaire shall also develop a Project specific website, where Concessionaire needs to upload Video and time stamp pictures every week regarding progress. The website must be accessible to the public. In addition, PDs/ ROs can also undertake need based drone videography as and when required. PD shall ensure development of a project specific website by the Concessionaire. In case of default on this account, the PD shall withhold an amount equivalent to Rs. 5 Lacs plus (drone rate X length of project X no. of defaulting week) from the dues to the Concessionaire.

As the drone videos/ reports will be permanent record on Data Lake and will be used as evidences during dispute resolution process before Arbitral Tribunals/ Courts including Supreme Court, the drone video shall be carried out carefully and correctly without distortions/ tampering by all parties concerned. The amount spent on this shall be charged to Concessionaire to the extent covered in the agreement.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

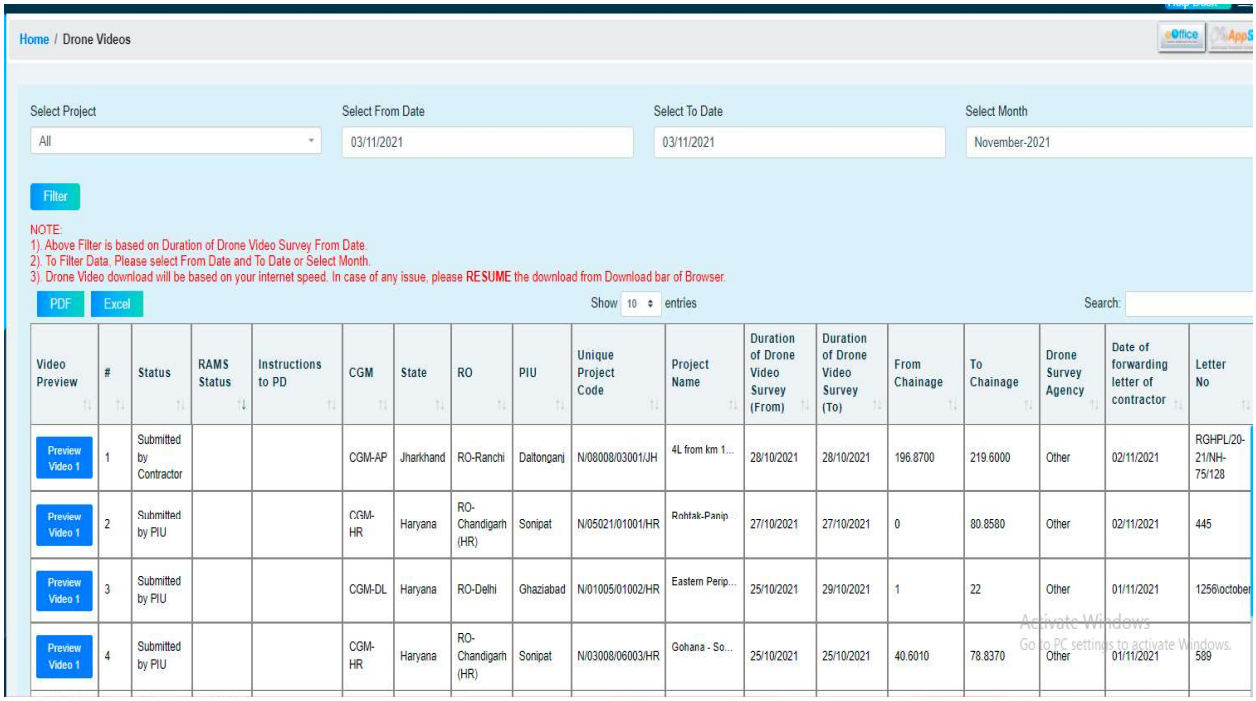

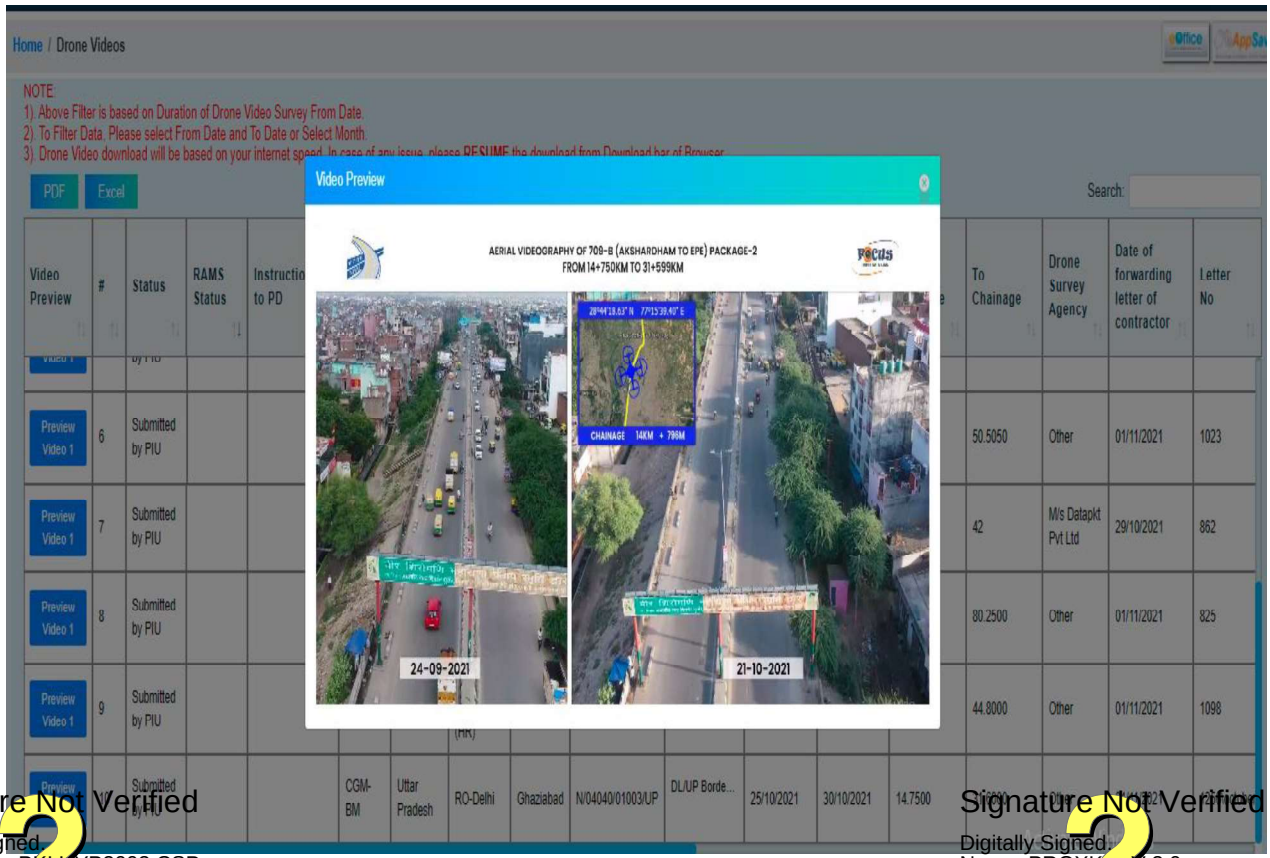

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619(Pradeep

Signature Not Verified
Digitally Signed
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 14

COMPLETION CERTIFICATE

14.1 Tests

14.1.1 No later than 30 (thirty) days prior to the likely completion of the Project, the Concessionaire shall notify the Independent Engineer of its intent to subject the Project to Tests. The date and time of each of the Tests shall be determined by the Independent Engineer in consultation with the Concessionaire, and notified to the Authority who may designate its representative to witness the Tests. The Concessionaire shall provide such assistance as the Independent Engineer may reasonably require for conducting the Tests. In the event of the Concessionaire and the Independent Engineer failing to mutually agree on the dates for conducting the Tests, the Concessionaire shall fix the dates by not less than 10 (ten) days' notice to the Independent Engineer, and in the event the Independent Engineer delays the Tests hereunder, the Authority shall impose exemplary penalties on the Independent Engineer and shall ensure that Tests are completed in time either by the Independent Engineer or any substitute thereof.

14.1.2 All Tests shall be conducted in accordance with Schedule-I at the cost and expense of the Concessionaire. The Independent Engineer shall observe, monitor and review the results of the Tests to determine compliance of the Project with Specifications and Standards and if it is reasonably anticipated or determined by the Independent Engineer during the course of any Test that the performance of the Project or any part thereof does not meet the Specifications and Standards, it shall have the right to suspend or delay such Test and require the Concessionaire to remedy and rectify the defects or deficiencies. Upon completion of each Test, the Independent Engineer shall provide to the Concessionaire and the Authority copies of all Test data including detailed Test results. For the avoidance of doubt, it is expressly agreed that the Independent Engineer may require the Concessionaire to carry out or cause to be carried out additional Tests, in accordance with Good Industry Practice, for determining the compliance of the Project with Specifications and Standards.

14.2 Completion Certificate

Upon completion of Construction Works and the Independent Engineer determining the Tests to be successful, it shall forthwith issue to the Concessionaire and the Authority a certificate substantially in the form set forth in Schedule-J (the **"Completion Certificate"**).

14.3 Provisional Certificate

14.3.1 Subject to the provisions of Clause 14.3.2, the Independent Engineer may, at the request of the Concessionaire, issue a provisional certificate of completion substantially in the form set forth in Schedule-J (the **"Provisional Certificate"**) if the Tests are successful and the Project can be safely and reliably placed in commercial operation though certain works or things forming part thereof are outstanding and not yet complete. In such an event, the Provisional Certificate shall have appended thereto a list of outstanding items signed jointly by the Independent Engineer and the Concessionaire (the **"Punch List"**); provided that the Independent Engineer shall not withhold the Provisional Certificate for reason of any work remaining incomplete if the delay in completion thereof is attributable to the Authority; provided further that the Punch List shall also include the cost of completion of each of the outstanding items.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

14.3.2 The Parties hereto expressly agree that a Provisional Certificate under this Clause 14.3 may, upon request of the Concessionaire to this effect, be issued for operating part of the Project, if the Concessionaire has completed construction of 100% (Hundred per cent) of the Site made available to the Concessionaire up to 146 days from the Appointed Date. Upon issue of such Provisional Certificate, the provisions of Article 15 shall apply to such completed part, and the rights and obligations of the Concessionaire for and in respect of such completed part of the Project shall be construed accordingly.

14.4 Completion of Punch List items

14.4.1 All items in the Punch List shall be completed by the Concessionaire within 90 (ninety) days of the date of issue of the Provisional Certificate and for any delay thereafter, other than for reasons solely attributable to the Authority or due to Force Majeure, the Authority shall be entitled to recover Damages from the Concessionaire to be calculated and paid for each day of delay until all items are completed, at the lower of (a) 0.1% (zero point one per cent) of the Performance Security, and (b) 0.2% (zero point two per cent) of the cost of completing such items as estimated by the Independent Engineer. Subject to payment of such Damages, the Concessionaire shall be entitled to a further period not exceeding 120 (one hundred and twenty) days for completion of the Punch List items. For the avoidance of doubt, it is agreed that if completion of any item is delayed for reasons solely attributable to the Authority or due to Force Majeure, the completion date thereof shall be determined by the Independent Engineer in accordance with Good Industry Practice, and such completion date shall be deemed to be the date of issue of the Provisional Certificate for the purposes of Damages, if any, payable for such item under this Clause 14.4.1.

14.4.2 Upon completion of all Punch List items, the Independent Engineer shall issue the Completion Certificate. Failure of the Concessionaire to complete all the Punch List items within the time set forth in Clause 14.4.1 for any reason, other than conditions constituting Force Majeure or for reasons solely attributable to the Authority, shall entitle the Authority to terminate this Agreement.

14.5 Withholding of Provisional or Completion Certificate

14.5.1 If the Independent Engineer determines that the Project or any part thereof does not conform to the provisions of this Agreement and cannot be safely and reliably placed in commercial operation, it shall forthwith make a report in this behalf and send copies thereof to the Authority and the Concessionaire. Upon receipt of such a report from the Independent Engineer and after conducting its own inspection, if the Authority is of the opinion that the Project is not fit and safe for commercial service, it shall, within 7 (seven) days of receiving the aforesaid report, notify the Concessionaire of the defects and deficiencies in the Project and direct the Independent Engineer to withhold issuance of the Provisional Certificate or Completion Certificate, as the case may be. Upon receipt of such notice, the Concessionaire shall remedy and rectify such defects or deficiencies and thereupon Tests shall be undertaken in accordance with this Article 14. Such procedure shall be repeated as necessary until the defects or deficiencies are rectified.

14.5.2 Notwithstanding anything to the contrary contained in Clause 14.5.1, the Authority may at any time after receiving a report from the Independent Engineer under that Clause direct the Independent Engineer to issue a Provisional Certificate under Clause 14.3, and such direction shall be complied forthwith.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey (v 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

14.6 Rescheduling of Tests

If the Independent Engineer certifies to the Authority and the Concessionaire that it is unable to issue the Completion Certificate or Provisional Certificate, as the case may be, because of events or circumstances on account of which the Tests could not be held or had to be suspended, the Concessionaire shall be entitled to re-schedule the Tests and hold the same as soon as reasonably practicable.

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS32307130516179(Pradeep

Signature Not Verified
Digitally Signed,
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 15

ENTRY INTO COMMERCIAL SERVICE

15.1 Commercial Operation Date (COD)

15.1.1 The Project shall be deemed to be complete when the Completion Certificate or the Provisional Certificate, as the case may be, is issued under the provisions of Article 14, and accordingly the commercial operation date of the Project shall be the date on which such Completion Certificate or the Provisional Certificate is issued (the **"COD"**). The Project shall enter into commercial service on COD whereupon the Concessionaire shall be entitled to demand and collect Annuity Payments in accordance with the provisions of this Agreement.

15.2 Damages for delay

Subject to the provisions of Clause 12.3, if COD does not occur prior to the 91st (ninety first) day after the Scheduled Completion Date, unless the delay is on account of reasons attributable to the Authority or due to Force Majeure, the Concessionaire shall pay Damages to the Authority in a sum calculated at the rate of 0.2% (zero point two per cent) of the amount of Performance Security for delay of each day until COD is achieved. Upon failure of the Concessionaire to pay the said Damages, the same shall be paid along with interest of Bank Rate plus 3% and shall be deducted from the 1st (first) Annuity Payment. In case the Damages and the interest thereof are more than the 1st Annuity payment then the balance Damages along with interest thereof shall be recovered from any further amount due and payable to the Concessionaire excluding O&M Payments but including interest to be paid on reducing balance of the Completion Cost remaining to be paid along with the 1st Annuity or from further Annuity payments.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS32307130516179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 16

CHANGE OF SCOPE

16.1 Change of Scope

16.1.1 The Authority may, notwithstanding anything to the contrary contained in this Agreement, require the provision of additional works and services which are not included in the Scope of the Project as contemplated by this Agreement (the **"Change of Scope"**). Any such Change of Scope shall be made in accordance with the provisions of this Article 16 and the costs thereof shall be expended by the Concessionaire and reimbursed to it by the Authority in accordance with Clause 16.3.

16.1.2 If the Concessionaire determines at any time that a Change of Scope is necessary for providing safer and improved services to the Users, it shall by notice in writing require the Authority to consider such Change of Scope. The Authority shall, within 15 (fifteen) days of receipt of such notice, either accept such Change of Scope with modifications, if any, and initiate proceedings therefor in accordance with this Article 16 or inform the Concessionaire in writing of its reasons for not accepting such Change of Scope, which decision of the Authority shall be final and binding.

16.1.3 Any works or services which are provided under and in accordance with this Article 16 shall form part of the Project and the provisions of this Agreement shall apply mutatis mutandis to such works or services.

16.2 Procedure for Change of Scope

16.2.1 In the event of the Authority determining that a Change of Scope is necessary, it shall issue to the Concessionaire a notice specifying in reasonable detail the works and services contemplated thereunder (the **"Change of Scope Notice"**).

16.2.2 Upon receipt of a Change of Scope Notice, the Concessionaire shall, with due diligence, provide to the Authority such information as is necessary, together with preliminary Documentation in support of:

(a) the impact, if any, which the Change of Scope is likely to have on the Project Completion Schedule if the works or services are required to be carried out during the Construction Period; and

(b) the options for implementing the proposed Change of Scope and the effect, if any, each such option would have on the costs and time thereof, including a detailed breakdown by work classifications specifying the material and labour costs calculated in accordance with the schedule of rates applicable to the works assigned by the Authority to its contractors, along with the proposed premium/discount on such rates; provided that the cost incurred by the Concessionaire in providing such information shall be reimbursed by the Authority to the extent such cost is certified by the Independent Engineer as reasonable.

16.2.3 Upon receipt of information set forth in Clause 16.2.2, if the Authority decides to proceed with the Change of Scope, it shall convey its preferred option to the Concessionaire, and the Parties shall, with assistance of the Independent Engineer, thereupon make good faith efforts to agree upon the time and costs for implementation thereof. Upon reaching an agreement, the Authority shall issue an order **(the "Change of Scope Order"**) requiring the Concessionaire to proceed with the performance thereof. In the event that the Parties

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS32307130516179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey (v 3.0-WD050114966WD PROXKey)
Date: 29-Aug-2024 20:06:49

are unable to agree, the Authority may, by issuing a Change of Scope Order, require the Concessionaire to proceed with the performance thereof pending resolution of the Dispute, or carry out the works in accordance with Clause 16.5.

16.2.4 The provisions of this Agreement, insofar as they relate to Construction Works and Tests, shall apply mutatis mutandis to the works undertaken by the Concessionaire under this Article 16.

16.3 Payment for Change of Scope

Within 7 (seven) days of issuing a Change of Scope Order, the Authority shall make an advance payment to the Concessionaire in a sum equal to 20% (twenty per cent) of the cost of Change of Scope as agreed hereunder, and in the event of a Dispute, 20% (twenty per cent) of the cost assessed by the Independent Engineer. The Concessionaire shall, after commencement of work, present to the Authority bills for payment in respect of the works in progress or completed works, as the case may be, supported by such Documentation as is reasonably sufficient for the Authority to determine the accuracy thereof. Within 30 (thirty) days of receipt of such bills, the Authority shall disburse to the Concessionaire such amounts as are certified by the Independent Engineer as reasonable and after making a proportionate deduction for the advance payment made hereunder, and in the event of any Dispute, final adjustments thereto shall be made under and in accordance with the Dispute Resolution Procedure.

16.4 Restrictions on certain works

16.4.1 Notwithstanding anything to the contrary contained in this Article 16, but subject to the provisions of Clause 16.4.2, the Authority shall not require the Concessionaire to undertake any works or services if such works or services are likely to delay completion of the Project by the Scheduled Completion Date; provided that in the event that the Authority considers such works or services to be essential, it may issue a Change of Scope Order, subject to the condition that the works forming part of or affected by such Change of Scope Order shall not be reckoned for purposes of determining completion of the Project and issuing the Provisional Certificate.

16.4.2 Notwithstanding anything to the contrary contained in this Article 16, the Concessionaire shall be entitled to nullify any Change of Scope Order if it causes the cumulative costs relating to all the Change of Scope Orders to exceed 10% (ten per cent) of the Bid Project Cost in any continuous period of 3 (three) years immediately preceding the date of such Change of Scope Order or if such cumulative costs exceed 25% (twenty five per cent) of the Bid Project Cost at any time during the Concession Period.

16.5 Power of the Authority to undertake works

16.5.1 Notwithstanding anything to the contrary contained in Clauses 16.1.1 and 16.3, the Authority may, after giving notice to the Concessionaire and considering its reply thereto, award any works or services, contemplated under Clause 16.1.1, to any person on the basis of open competitive bidding; provided that the Concessionaire shall have the option of matching the first ranked bid in terms of the selection criteria, subject to payment of 2% (two per cent) of the bid amount to the Authority, and thereupon securing the award of such works or services. For the avoidance of doubt, it is agreed that the Concessionaire shall be entitled to exercise such option only if it has participated in the bidding process and its bid does not exceed the first ranked bid by more than 10% (ten per cent) thereof. It is also

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey W 3.0-WD05611496(WD PROXKey)
Date: 29 Aug 2014 20:06:49

agreed that the Concessionaire shall provide access, assistance and cooperation to the person who undertakes the works or services hereunder[3].

16.5.2 The works undertaken in accordance with this Clause 16.5 shall conform to the Specifications and Standards and shall be carried out in a manner that minimizes disruption in operation of the Project. The provisions of this Agreement, insofar as they relate to Construction Works and Tests, shall apply mutatis mutandis to the works carried out under this Clause 16.5.

16.6 Reduction in Scope of the Project

16.6.1 If the Concessionaire shall have failed to complete any Construction Works on account of Force Majeure or for reasons attributable to the Authority or under the provision of Clause 10.3.4 of this Agreement, the Authority shall follow the following process for calculation of total cost of reduced Scope

I. On direction by the Authority, the Independent Engineer to assess the civil cost of the reduced Scope, as per the schedule of rates applicable on the Bid Due Date.
II. The civil cost of the reduced Scope shall be multiplied by the 1.055 to arrive at the estimated cost of reduced Scope.
III. The estimated cost of reduced Scope shall then be multiplied by the ratio of Bid Project Cost to Estimated Project Cost to arrive at the Total Cost of Reduced Scope.

On or before a Payment Milestone immediately succeeding the date of finalization of such Reduction in Scope, the Bid Project Cost shall be reduced by the Total Cost of Reduced Scope and all payments made or to be made to the Concessionaire shall be suitably adjusted and recoveries, if any, shall be made from the payment to be released on that Payment Milestone immediately succeeding the date of finalization of Reduction in Scope.

For the avoidance of doubt, it is agreed that upon the Reduction of Scope and revision of Bid Project Cost, all references to Bid Project Cost would mean the revised Bid Project Cost and all the payments would be calculated as per the revised Bid Project Cost.

16.6.2 For determining the obligations of the Concessionaire under this Clause 16.6, the provisions of Clauses 16.1, 16.2 and 16.4 shall apply mutatis mutandis, and upon issue of Change of Scope Order by the Authority hereunder, the Concessionaire shall pay forthwith the sum specified therein.

16.7 Effect of Change in Scope on the O&M Costs

Pursuant to the provisions if this Article 16, if the Change in Scope leads to a reduction or increase in the length of the Project Highway, the O&M Payments as provided in Clause 23.7 shall be reduced or increased in proportion to the reduction or increase in the length of the Project Highway.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

[3]The Authority shall transfer 75% (seventy five per cent) of the amount so received to the first ranked bidder whose bid shall have been matched by the Concessionaire.

ARTICLE 17

OPERATION AND MAINTENANCE

17.1 O&M obligations of the Concessionaire

17.1.1 During the Operation Period, the Concessionaire shall operate and maintain the Project in accordance with this Agreement either by itself, or through the O&M Contractor and if required, modify, repair or otherwise make improvements to the Project to comply with the provisions of this Agreement, Applicable Laws and Applicable Permits, and conform to Specifications and Standards and Good Industry Practice. The obligations of the Concessionaire hereunder shall include:

(a) Procuring and ensuring safe, smooth and uninterrupted use of the Project, including prevention of loss or damage thereto, during normal operating conditions;

(b) Minimizing disruption in the event of accidents or other incidents affecting the safety and use of the Project by providing a rapid and effective response and maintaining liaison with emergency services of the State;

(c) Carrying out periodic preventive maintenance of the Project;

(d) undertaking routine maintenance including prompt repairs of potholes, cracks, joints, drains, embankments, structures, markings, lighting, signage and other control devices;

(e) Undertaking major maintenance such as resurfacing, repairs to structures, and repairs and refurbishment of system and equipment;

(f) Preventing, with the assistance of concerned law enforcement agencies, any unauthorized use of the Project;

(g) Preventing, with the assistance of the concerned law enforcement agencies, any encroachments on, or unauthorized entry to the Project;

(h) Protection of the environment and provision of equipment and materials thereof;

(i) operation and maintenance of all communication, control and administrative systems necessary for the efficient operation of the Project and for providing safe, smooth and uninterrupted use of the Project;

(j) Deleted

(k) Maintaining a public relations unit to interface with and attend to suggestions from the Users, government agencies, media and other agencies; and

(l) Complying with Safety Requirements in accordance with Article 18.

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

17.1.2 The Concessionaire shall remove promptly from the Project all construction machinery and materials, waste materials (including hazardous materials and waste), rubbish and other debris (including, without limitation, accident debris) and keep the Project in a clean, tidy and orderly condition, and in conformity with Applicable Laws,

Signature Not Verified
Digitally Signed
Name: PROXKey V 3.0-WD0501149(WD1PROXKey)
Date: 29-Aug-2024 20:06:49

Applicable Permits and Good Industry Practice. For the avoidance of doubt, it is agreed that the debris and material excavated shall be carried to and deposited at the location identified by the Authority and/or Independent Engineer.

17.1.3 The Concessionaire shall maintain, in conformity with Good Industry Practice, all stretches of approach roads.

17.2 Maintenance Requirements

The Concessionaire shall procure that at all times during the Operation Period; the Project conforms to the maintenance requirements set forth in Schedule-K (the **"Maintenance Requirements"**).

17.3 Maintenance Manual

17.3.1 No later than 90 (ninety) days prior to the Scheduled Completion Date, the Concessionaire shall, in consultation with the Independent Engineer, evolve a repair and maintenance manual (the **"Maintenance Manual"**) for the regular and preventive maintenance of the Project in conformity with the Specifications and Standards, Maintenance Requirements, Safety Requirements and Good Industry Practice, and shall provide 5 (five) copies thereof to the Authority and 2 (two) copies to the Independent Engineer. The Maintenance Manual shall be revised and updated once every 3 (three) years and the provisions of this Clause shall apply, mutatis mutandis, to such revision.

17.3.2 Without prejudice to the provision of Clause 17.3.1, the Maintenance Manual shall, in particular, include provisions for maintenance of Project Assets and shall provide for life cycle maintenance, routine maintenance and reactive maintenance which may be reasonably necessary for maintenance and repair of The Project Assets, including replacement thereof, such that their overall condition conforms to Good Industry Practice.

17.4 Maintenance Program

17.4.1 On or before COD and no later than 45 (forty five) days prior to the beginning of each Accounting Year during the Operation Period, as the case may be, the Concessionaire shall provide to the Authority and the Independent Engineer, its proposed annual program of preventive, urgent and other scheduled maintenance (the **"Maintenance Program"**) to comply with the Maintenance Requirements, Maintenance Manual and Safety Requirements. Such Maintenance Program shall include:

(a) preventive maintenance schedule;

(b) arrangements and procedures for carrying out urgent repairs;

(c) Criteria to be adopted for deciding maintenance needs;

(d) Intervals and procedures for carrying out inspection of all elements of the Project;

(e) Intervals at which the Concessionaire shall carry out periodic maintenance;

(f) Arrangements and procedures for carrying out safety related measures; and

(g) Intervals for major maintenance works and the scope thereof.

17.4.2 Within 15 (fifteen) days of receipt of the Maintenance Program, the Independent Engineer shall review the same and convey its comments to the Concessionaire with particular

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(Mtg PROXKey)
Date: 29-Aug-2024 20:06:49

reference to its conformity with the Maintenance Requirements, Maintenance Manual and Safety Requirements.

17.4.3 The Concessionaire may modify the Maintenance Program as may be reasonable in the circumstances, and the procedure specified in Clauses 17.4.1 and 17.4.2 shall apply mutatis mutandis to such modifications.

17.5 Safety, breakdowns and accidents

17.5.1 The Concessionaire shall ensure safe conditions for the Users, and in the event of unsafe conditions, closures, diversions, breakdowns and accidents, it shall follow the relevant operating procedures including the setting up of temporary Lights and removal of obstruction and debris without delay. Such procedures shall conform to the provisions of this Agreement, Applicable Laws, Applicable Permits and Good Industry Practice.

17.5.2 The Concessionaire's responsibility for rescue operations on the Project shall be limited to an initial response to any particular incident until such time as the competent authority takes charge and shall include prompt removal of vehicles or debris or any other obstruction, which may endanger or interrupt the use of the Project. For this purpose, it shall maintain and operate a round-the-clock rescue post with equipment in accordance with Good Industry Practice.

17.6 De-commissioning due to Emergency

17.6.1 If, in the reasonable opinion of the Concessionaire, there exists an Emergency which warrants de-commissioning and closure of the whole or any part of the Project, the Concessionaire shall be entitled to de-commission and close the whole or any part of the Project for so long as such Emergency and the consequences thereof warrant; provided that such de-commissioning and particulars thereof shall be notified by the Concessionaire to the Authority Without any delay, and the Concessionaire shall diligently carry out and abide by any reasonable directions that the Authority may give for dealing with such Emergency.

17.6.2 The Concessionaire shall re-commission the Project or the affected part thereof as quickly as practicable after the circumstances leading to its de-commissioning and closure have ceased to exist or have so abated as to enable the Concessionaire to re-commission the Project and shall notify the Authority of the same without any delay.

17.6.3 Any decommissioning or closure of any part of the Project and the re- commissioning thereof shall, as soon as practicable, be brought to the notice of affected persons by means of public announcements/notice.

17.7 Project closure

17.7.1 Save and except as provided in Clause 17.6, the Concessionaire shall not close any part of the Project for undertaking maintenance or repair works not forming part of the Maintenance Program, except with the prior written approval of the Independent Engineer. Such approval shall be sought by the Concessionaire through a written request to be made to the Independent Engineer, and a copy thereof furnished to the Authority, at least 7 (seven) days before the proposed closure and shall be accompanied by particulars thereof. Within 3 (three) days of receiving such request, the Independent Engineer shall grant permission with such modifications as it may deem reasonable and necessary in conformity with the Maintenance Manual and Maintenance Program and a copy of such permission shall be sent to the Authority.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05021496(WD PROXKey)
Date:29 Aug 2024 20:06:49

17.7.2 The provisions of Clause 17.7.1 shall not apply to de-commissioning under Clause 17.6.1 or to any closure for a period not exceeding 2 (two) hours in a day at any time of the day and 6 (six) hours in a day at a time specified by the Independent Engineer as off-peak hours when usage of the Project is comparatively lower.

17.7.3 Upon receiving the permission pursuant to Clause 17.7.1, the Concessionaire shall be entitled to close the designated part of the Project for the period specified therein, and in the event of any delay in re-opening such part, the Concessionaire shall pay Damages to the Authority calculated at the rate of 0.5 % (zero point Five per cent) of the Performance Security, for each day of delay until that part of the Project has been re-opened for use.

17.8 Damages for breach of maintenance obligations

17.8.1 In the event that the Concessionaire fails to repair or rectify any defect or deficiency set forth in the Maintenance Requirements within the period specified therein, it shall be deemed to be in breach of this Agreement and the Authority shall be entitled to recover Damages, to be calculated and paid for each day of delay until the breach is cured, at the higher of (a) 2% (two per cent) of the Performance Security, and (b) 0.1% (zero point one per cent) of the cost of such repair or rectification as estimated by the Independent Engineer. Recovery of such Damages shall be without prejudice to the rights of the Authority under this Agreement, including the right of Termination thereof.

17.8.2 The Damages set forth in Clause 17.8.1 may be assessed and specified forthwith by the Independent Engineer; provided that the Authority may, in its discretion, demand a smaller sum as Damages, if in its opinion, the breach has been cured promptly and the Concessionaire is otherwise in compliance with its obligations hereunder. The Concessionaire shall pay such Damages forthwith and in the event that it contests such Damages, the Dispute Resolution Procedure shall apply.

17.9 Authority's right to take remedial measures

17.9.1 In the event the Concessionaire does not maintain and/or repair the Project or any part thereof in conformity with the Maintenance Requirements, the Maintenance Manual or the Maintenance Program, as the case may be, and fails to commence remedial works within 15 (fifteen) days of receipt of the O&M Inspection Report or a notice in this behalf from the Authority or the Independent Engineer, as the case may be, the Authority shall, without prejudice to its rights under this Agreement including Termination thereof, be entitled to undertake such remedial measures at the risk and cost of the Concessionaire, and to recover its cost from the Concessionaire. In addition to recovery of the aforesaid cost, a sum equal to 20% (twenty per cent) of such cost shall be paid by the Concessionaire to the Authority as Damages. For the avoidance of doubt, the right of the Authority under this Clause 17.9.1 shall be without prejudice to its rights and remedies provided under Clause 17.8.

17.9.2 The Authority shall have the right, and the Concessionaire hereby expressly grants to the Authority the right, to recover the costs and Damages specified in Clause 17.9.1 directly from the Escrow Account as if such costs and Damages were O&M Expenses, and for that purpose, the Concessionaire hereby agrees to give irrevocable instructions to the Escrow Bank to make payment from the Escrow Account in accordance with the instructions of the Authority under this Clause 17.9.2 and debit the same to O&M Expenses.

17.10 Overriding powers of the Authority

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep)
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

17.10.1 If in the reasonable opinion of the Authority, the Concessionaire is in material breach of its obligations under this Agreement and, in particular, the Maintenance Requirements, and such breach is causing or likely to cause material hardship or danger to the Users, the Authority may, without prejudice to any of its rights under this Agreement including Termination thereof, by notice require the Concessionaire to take reasonable measures immediately for rectifying or removing such hardship or danger, as the case may be.

17.10.2 In the event that the Concessionaire, upon notice under Clause 17.10.1, fails to rectify or remove any hardship or danger within a reasonable period, the Authority may exercise overriding powers under this Clause 17.10.2 and take over the performance of any or all the obligations of the Concessionaire to the extent deemed necessary by it for rectifying or removing such hardship or danger; provided that the exercise of such overriding powers by the Authority shall be of no greater scope and of no longer duration than is reasonably required hereunder; provided further that any costs and expenses incurred by the Authority in discharge of its obligations hereunder shall be deemed to be O&M Expenses, and the Authority shall be entitled to recover them from the Concessionaire in accordance with the provisions of Clause 17.9 along with the Damages specified therein.

17.10.3 In the event of a national emergency, civil commotion or any other act specified in Clause 28.3, the Authority may take over the performance of any or all the obligations of the Concessionaire to the extent deemed necessary by it, and exercise such control over the Project or give such directions to the Concessionaire as may be deemed necessary; provided that the exercise of such overriding powers by the Authority shall be of no greater scope and of no longer duration than is reasonably required in the circumstances which caused the exercise of such overriding power by the Authority. For the avoidance of doubt, it is agreed that the consequences of such action shall be dealt in accordance with the provisions of Article 28. It is also agreed that the Concessionaire shall comply with such instructions as the Authority may issue in pursuance of the provisions of this Clause 17.10, and shall provide assistance and cooperation to the Authority, on a best effort basis, for performance of its obligations hereunder.

17.11 Restoration of loss or damage to the Project

Save and except as otherwise expressly provided in this Agreement, in the event that the Project or any part thereof suffers any loss or damage during the Concession Period from any cause whatsoever, the Concessionaire shall, at its cost and expense, rectify and remedy such loss or damage forthwith so that the Project conforms to the provisions of this Agreement.

17.12 Modifications to the Project

The Concessionaire shall not carry out any material modifications to the Project, save and except where such modifications are necessary for the Project to operate in conformity with the Specifications and Standards, Maintenance Requirements, Good Industry Practice and Applicable Laws; provided that the Concessionaire shall notify the Independent Engineer of the proposed modifications along with particulars thereof at least 15 (fifteen) days before commencing work on such modifications and shall reasonably consider any comments that the Independent Engineer may make within 15 (fifteen) days of receiving the Concessionaire's proposal. For the avoidance of doubt, all modifications made hereunder shall comply with the Safety Requirements, Specifications and Standards, Applicable Laws and the provisions of this Agreement.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey(3.0-WD05611496(WD PROXKey)
Date: 29 Aug 2024 20:06:49

17.13 Excuse from performance of obligations

The Concessionaire shall not be considered in breach of its obligations under this Agreement if any part of the Project is not available to Users on account of any of the following for the duration thereof:

(a) an event of Force Majeure;

(b) measures taken to ensure the safe use of the Project except when unsafe conditions occurred because of failure of the Concessionaire to perform its obligations under this Agreement; or

(c) compliance with a request from the Authority or the directions of any Government Instrumentality, the effect of which is to close all or any part of the Project:

Provided, that any such non-availability and particulars thereof shall be notified by the Concessionaire to the Authority and the Independent Engineer without any delay;

Provided further that the Concessionaire shall keep all unaffected parts of the Project open to Users, provided they can be operated safely.

17.14 Deleted

17.15 Installation and operation of CCTV

The Concessionaire shall install and operate a closed circuit television system to monitor such parts of the Project as may be necessary and expedient for a safe, secure and smooth operation thereof.

17.16 Advertising on the Site

The Concessionaire shall not undertake or permit any form of commercial advertising, display or hoarding at any place on the Site.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 18

SAFETY REQUIREMENTS

18.1 Safety Requirements

18.1.1 The Concessionaire shall comply with the provisions of this Agreement, Applicable Laws and Applicable Permits and conform to Good Industry Practice for securing the safety of the Users. In particular, the Concessionaire shall develop, implement and administer a surveillance and safety program for providing a safe environment on or about the Project, and shall comply with the safety requirements set forth in Schedule-L (the **"Safety Requirements"**).

18.1.2 The Authority shall appoint an experienced and qualified firm or organization (the **"Safety Consultant"**) for carrying out safety audit of the Project in accordance with the Safety Requirements, and shall take all other actions necessary for securing compliance with the Safety Requirements.

18.2 Expenditure on Safety Requirements

All costs and expenses arising out of or relating to Safety Requirements shall be borne by the Concessionaire to the extent such costs and expenses form part of the works and services included in the Scope of the Project, and works and services, if any, not forming part of the Scope of the Project shall be undertaken and funded in accordance with the provisions of Article 16.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 19

MONITORING OF OPERATION AND MAINTENANCE

19.1 Monthly status reports

19.1.1 During the Operation Period, the Concessionaire shall, no later than 7 (seven) days after the close of each month, furnish to the Authority and the Independent Engineer a monthly report stating in reasonable detail the condition of the Project including its compliance or otherwise with the Maintenance Requirements, Maintenance Manual, Maintenance Program and Safety Requirements, and shall promptly give such other relevant information as may be required by the Independent Engineer or the Authority. In particular, such report shall separately identify and state in reasonable detail the defects and deficiencies that require rectification.

19.1.2 During the Operation Period, the Concessionaire shall, no later than 10 (ten) days after the close of each month, furnish a monthly management report which shall include a summary of:

(a) key performance indicators achieved in the month, along with an analysis of reasons for failures, if any, and proposals to remedy the same;

(b) key operational hurdles and deliverables in the succeeding month along with strategies for addressing the same and for otherwise improving the Project's operational performance; and

(c) key financial parameters for the month, as benchmarked against the monthly budget and the reasons for shortfall, if any, and proposals to remedy the same.

19.2 Inspection

The Independent Engineer shall inspect the Project at least once a month. It shall make a report of such inspection (the **"O&M Inspection Report"**) stating in reasonable detail the defects or deficiencies, if any, with particular reference to the Maintenance Requirements, Maintenance Manual, the Maintenance Program and Safety Requirements, and send a copy thereof to the Authority and the Concessionaire within 7 (seven) days of such inspection.

19.3 Tests

For determining that the Project conforms to the Maintenance Requirements, the Independent Engineer shall require the Concessionaire to carry out, or cause to be carried out, tests specified by it in accordance with Good Industry Practice. The Concessionaire shall, with due diligence, carry out or cause to be carried out all such tests in accordance with the instructions of the Independent Engineer and furnish the results of such tests forthwith to the Independent Engineer. One half of the costs incurred on such tests, and to the extent certified by the Independent Engineer as reasonable, shall be reimbursed by the Authority to the Concessionaire.

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2008 CSP India v3.0-HS2307130516179(Pradeep
Signature Not Verified
Digitally Signed,
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2014 20:06:49

19.4 Remedial measures

19.4.1 The Concessionaire shall repair or rectify the defects or deficiencies, if any, set forth in the O&M Inspection Report or in the test results referred to in Clause and furnish a report in

respect thereof to the Independent Engineer and the Authority within 15 (fifteen) days of receiving the O&M Inspection Report or the test results, as the case may be; provided that where the remedying of such defects or deficiencies is likely to take more than 15 (fifteen) days, the Concessionaire shall submit progress reports of the repair works once every week until such works are completed in conformity with this Agreement.

19.4.2 The Independent Engineer shall require the Concessionaire to carry out or cause to be carried out tests, at its own cost, to determine that such remedial measures have brought the Project into compliance with the Maintenance Requirements and the procedure set forth in this Clause 19.4 shall be repeated until the Project conforms to the Maintenance Requirements. In the event that remedial measures are not completed by the Concessionaire in conformity with the provisions of this Agreement, the Authority shall be entitled to recover Damages from the Concessionaire under and in accordance with the provisions of Clause 17.8.

19.5 Reports of unusual occurrence

The Concessionaire shall, prior to the close of each day, send to the Authority and the Independent Engineer, by facsimile or e-mail, a report stating accidents and unusual occurrences on the Project relating to the safety and security of the Users and the Project. A weekly and monthly summary of such reports shall also be sent within 3 (three) days of the closing of each week and month, as the case may be. For the purposes of this Clause 19.5, accidents and unusual occurrences on the Project shall include:

(a) Death or injury to any person;

(b) Damaged or dislodged fixed equipment;

(c) Any damage or obstruction on the Project, which results in slow down of the services being provided by the Concessionaire;

(d) Disablement of any equipment during operation;

(e) Communication failure affecting the operation of the Project;

(f) Smoke or fire;

(g) Flooding of the Project; and

(h) Such other relevant information as may be required by the Authority or the Independent Engineer.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 20

REGULATION AND MANAGEMENT

20.1 Traffic regulation by the Concessionaire

The Concessionaire shall regulate traffic on the Project in accordance with Applicable Laws, and subject to the supervision and control of the State authorities or a substitute thereof empowered in this behalf under Applicable Laws.

20.2 Police assistance

For regulating the use of Project in accordance with Applicable Laws and this Agreement, the Authority shall assist the Concessionaire in procuring police assistance from the State Police Department or a substitute thereof. The police assistance shall include setting up of a traffic aid post (the **"Traffic Aid Post"**) at each of the Toll Plazas with a mobile Police squad for round-the-clock patrolling of the Project.

20.3 Buildings for Traffic Aid Posts

The Concessionaire shall, in accordance with the type designs prescribed for such police outpost buildings by the State Government or a substitute thereof, construct at its own cost and expense, buildings not exceeding 25 (twenty five) square metres of plinth area, for each of the Traffic Aid Posts, and hand them over to the Authority no later than 60 (sixty) days prior to the Scheduled Completion Date. The Traffic Aid Posts shall be deemed to be part of the Site and shall vest in the Authority.

20.4 Medical Aid Posts

For providing emergency medical aid during- the Operation Period, as set forth in this Agreement, the Concessionaire shall assist the State Government or a substitute thereof to be designated by the Authority in setting up and operating a medical aid post (the **"Medical Aid** Post") at the Site for victims of accidents on the Project at each of the Toll Plazas with round-the-clock ambulance services for victims of accidents on the Project Highway.

20.5 Buildings for Medical Aid Posts

The Concessionaire shall, at its cost and in accordance with the type designs prescribed for such buildings by the State Medical Department (or a substitute thereof to be designated by the Authority), construct an aid post building and 2 (two) residential quarters, and hand them over to the Authority, no later than 30 (thirty) days prior to Scheduled Completion Date. The Medical Aid Post(s) shall be deemed to be part of the Site and shall vest in the Authority.

20.6 Computer systems and network

The Concessionaire shall install, operate and maintain a computer system with round-the-clock connections to the networks of the Authority and other related entities for exchange of data and information useful or necessary for efficient and transparent planning and management of traffic. For this purpose, it shall follow such protocol for Electronic Data Interchange (the **"EDI"**) as the Authority may specify.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WIDE6E1496(MD PROXKey)
Date: 29-Aug-2024 20:06:49

20.7 Recurring expenditure on Police assistance

On or before the Scheduled Completion Date, the Concessionaire shall provide to the State Police Department or a substitute thereof one Jeep or similar vehicle in good working condition along with chauffeurs for round-the-clock patrolling as set forth in Clause 20.2 and shall meet the operating costs of such vehicle including the salaries and allowances of the chauffeurs.

20.8 Recurring expenditure on Medical Aid Posts

On or before COD, the Concessionaire shall provide to the State Medical Department or a substitute thereof to be designated by the Authority one ambulance in good working condition along with chauffeurs for round-the-clock ambulance services as set forth in Clause 20.4 and meet the operating costs of such ambulance including the salaries and allowances of the chauffeurs. The Concessionaire shall also reimburse to the State Medical Department (or a substitute thereof to be designated by the Authority) the actual expenditure incurred by it in each Accounting Year on the medical equipment, and the pay and allowances of up to 2 (two) medical personnel deployed exclusively for the Medical Aid Posts and ambulance, and shall maintain the Medical Aid Post buildings in accordance with Good Industry Practice. For the avoidance of doubt, it is agreed that the Concessionaire shall not be liable for any other expenditure incurred by the State Medical Department or a substitute thereof to be designated by the Authority.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 21

INDEPENDENT ENGINEER

21.1 Appointment of Independent Engineer

The Authority shall appoint a consulting engineering firm substantially in accordance with the selection criteria set forth in Schedule-M, to be the independent consultant under this Agreement (the **"Independent Engineer"**). The appointment shall be made no later than 60 (sixty) days from the date of this Agreement and shall be for a period of Construction Period plus six (6) months. On expiry or termination of the aforesaid appointment, the Authority shall appoint an Independent Engineer for a further term of 3 (three) years in accordance with the provisions of Schedule-M, and such procedure shall be repeated after expiry of each appointment.

21.2 Duties and functions

21.2.1 The Independent Engineer shall discharge its duties and functions substantially in accordance with the terms of reference set forth in Schedule-N.

21.2.2 The Independent Engineer shall submit regular periodic reports (at least once every month) to the Authority in respect of its duties and functions set forth in Schedule-N.

21.2.3 A true copy of all communications sent by the Authority to the Independent Engineer and by the Independent Engineer to the Authority shall be sent forthwith by the Independent Engineer to the Concessionaire.

21.2.4 A true copy of all communications sent by the Independent Engineer to the Concessionaire and by the Concessionaire to the Independent Engineer shall be sent forthwith by the Independent Engineer to the Authority.

21.3 Remuneration

The remuneration, cost and expenses of the Independent Engineer shall be paid by the Authority and subject to the limits set forth in Schedule-M, one-half of such remuneration, cost and expenses shall be reimbursed by the Concessionaire to the Authority within 15 (fifteen) days of receiving a statement of expenditure from the Authority.

21.4 Termination of appointment

21.4.1 The Authority may, in its discretion, terminate the appointment of the Independent Engineer at any time, but only after appointment of another Independent Engineer in accordance with Clause 21.1.

21.4.2 If the Concessionaire has reason to believe that the Independent Engineer is not discharging its duties and functions in a fair, efficient and diligent manner, it may make a written representation to the Authority and seek termination of the appointment of the Independent Engineer. Upon receipt of such representation, the Authority shall hold a tripartite meeting with the Concessionaire and Independent Engineer for an amicable resolution of the Dispute, and if any difference or disagreement between the Authority and the Concessionaire remains unresolved, the Dispute shall be settled in accordance with the Dispute Resolution Procedure. In the event that the appointment of the Independent Engineer is terminated hereunder, the Authority shall appoint forthwith another Independent Engineer in accordance with Clause 21.1.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey WD PROXKey WD056114960(WD PROXKey)
Date: 29-Aug-2024 20:06:49

21.5 Authorized signatories

The Authority shall require the Independent Engineer to designate and notify to the Authority and the Concessionaire up to 2 (two) persons employed in its firm to sign for and on behalf of the Independent Engineer, and any communication or document required to be signed by the Independent Engineer shall be valid and effective only if signed by any of the designated persons; provided that the Independent Engineer may, by notice in writing, substitute any of the designated persons by any of its employees.

21.6 Dispute resolution

If either Party disputes any advice, instruction, decision, direction or award of the Independent Engineer, or, as the case may be, the assertion or failure to assert jurisdiction, the Dispute shall be resolved in accordance with the Dispute Resolution Procedure.

21.7 Interim arrangement

In the event that the Authority does not appoint an Independent Engineer, or the Independent Engineer so appointed has relinquished its functions or defaulted in discharge thereof, the Authority may, in the interim, designate and authorize any person to discharge the functions of the Independent Engineer in accordance with the provisions of this Agreement, save and except that such person shall not exercise any functions relating to review, comment, approval or inspection as specified in this Agreement for and in respect of the Independent Engineer, and such functions shall be discharged as and when an Independent Engineer is appointed in accordance with the provisions of this Agreement. Provided, however, that nothing contained in this Clause 21.7 shall in any manner restrict the rights of the Authority to enforce compliance of the provisions of this Agreement.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Part IV

Financial Covenants

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 22

FINANCIAL CLOSE

22.1 Financial Close

22.1.1 The Concessionaire hereby agrees and undertakes that it shall achieve Financial Close for an amount not lower than either: i. Total Project Cost; or ii. 10% less than (Estimated Project Cost minus 40% of Bid Project Cost) within 150 (one hundred and fifty) days from the date of this Agreement. In the event of delay in achieving the Financial Close, the Concessionaire shall be entitled to a further period not exceeding 120 (one hundred twenty) days, subject to payment of Damages to the Authority in a sum calculated at the rate of 0.05% (zero point zero five per cent) of the Performance Security for each day of delay, provided that the Damages specified herein shall be payable every week in advance and the period beyond the said 150 (one hundred and fifty) days shall be granted only to the extent of Damages so paid. In the event of delay in achieving the Financial Close beyond 270 (two hundred and seventy) days from the date of this Agreement, the Concessionaire shall be entitled to a further period not exceeding 95 (ninety five) days, subject to payment of Damages to the Authority in a sum calculated at the rate of 0.1% (zero point one per cent) of the Performance Security for each day of delay, provided that the Damages specified herein shall be payable every week in advance and the period beyond the said 270 (two hundred and seventy) days shall be granted only to the extent of Damages so paid; provided further that no Damages shall be payable if such delay in Financial Close has occurred due to Force Majeure. For the avoidance of doubt, the Damages payable hereunder by the Concessionaire shall be in addition to the Damages, if any, due and payable under the provisions of Clause 4.3.

22.1.2 The Concessionaire shall, upon occurrence of Financial Close, notify the Authority forthwith, and shall have provided to the Authority, at least 2 (two) days prior to the Financial Close, 3 (three) true copies of the Financial Package and the Financial Model, duly attested by a Director of the Concessionaire, along with 3 (three) soft copies of the Financial Model in MS Excel version or any substitute thereof, which is acceptable to the Senior Lenders.

22.2 Termination due to failure to achieve Financial Close

22.2.1 Notwithstanding anything to the contrary contained in this Agreement, but subject to Clause 28.6.1, in the event that Financial Close does not occur, for any reason whatsoever, within the period set forth in Clause 22.1.1 or the extended period provided thereunder, all rights, privileges, claims and entitlements of the Concessionaire under or arising out of this Agreement shall be deemed to have been waived by, and to have ceased with the concurrence of the Concessionaire, and the Concession Agreement shall be deemed to have been terminated by mutual agreement of the Parties.

22.2.2 Upon Termination under Clause 22.2.1, the Authority shall be entitled to encash the Bid Security and appropriate the proceeds thereof as Damages; provided, however, that if Financial Close has not occurred due to Force Majeure, it shall, upon Termination, release the Bid Security or Performance Security, as the case may be. For the avoidance of doubt, it is expressly agreed that if the Bid Security shall have been substituted by the Performance Security, the Authority shall be entitled to encash there from an amount equal to the Bid Security.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS230713051619(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey v7.3.0-1 WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 23

PAYMENT OF BID PROJECT COST

23.1 Bid Project Cost

The Parties expressly agree that the cost of construction of the Project, as on the Bid Date, which is due and payable by the Authority to the Concessionaire, shall be deemed to be Rs. 519,00,00,000 /- (Rupees Five Hundred Nineteen Crore Only) (The **"Bid Project Cost"**). The Parties further agree that the Bid Project Cost specified hereinabove for payment to the Concessionaire shall be inclusive of the cost of construction, interest during construction, working capital, physical contingencies and all other costs, expenses and charges for and in respect of construction of the Project, save and except any additional costs arising on account of variation in Price Index, Change of Scope, Change in Law, Force Majeure or breach of this Agreement, which costs shall be due and payable to the Concessionaire in accordance with the provisions of the Agreement. The Bid Project Cost shall be exclusive of GST, which shall be paid to the Concessionaire by the Authority at the applicable rates. For the avoidance of doubt, the Bid Project Cost specified herein represents the amount due and payable by the Authority to the Concessionaire and may be less than, equal to, or more than the Estimated Project Cost.

23.2 Adjusted Bid Project Cost

23.2.1 The Bid Project Cost specified in Clause 23.1 shall be revised from time to time in accordance with the provisions of this Clause 23.2 to reflect the variation in Price Index occurring after the Reference Index Date immediately preceding the Bid Date.

23.2.2 The Bid Project Cost adjusted for variation between the Price Index occurring between the Reference Index Date preceding the Bid Date and the Reference Index Date immediately preceding the Appointed Date shall be deemed to be the Bid Project Cost at commencement of construction.

23.2.3 For every month occurring after the Appointed Date, the Authority shall compute the variation in Price Index occurring between the Reference Index Date preceding the Bid Date and the Reference Index Date preceding the date of Invoice, and shall express the latter as a multiple of the former (the "**Price Index Multiple**"). All Invoices to be submitted by the Concessionaire to the Authority for and in respect of the Construction Period shall be the product of the relevant proportion of the Bid Project Cost and the Price Index Multiple applicable on the date of Invoice. For the avoidance of doubt and by way of illustration, if (a) the Price Index on the Reference Index Date preceding the Bid Date, say January 31, 2016, is 200 (two hundred); (b) the Invoice is submitted on October 15, 2017; and (c) the Price Index as on September 30, 2017 is 210 (two hundred and ten), then the Price Index Multiple for determination of the amount due in respect of such Invoice shall be 1.05 (one point zero five).

23.3 Payment of Bid Project Cost

23.3.1 40% (forty per cent) of the Bid Project Cost , adjusted for the Price Index Multiple, shall be due and payable to the Concessionaire in 10 (ten) equal installments of 4% (four percent) each during the Construction Period in accordance with the provisions of Clause 23.4.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: 3.PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

23.3.2 The remaining Bid Project Cost, adjusted for the Price Index Multiple, shall be due and payable in 30 (thirty) biannual installments commencing from the 180th (one hundred and eightieth) day of COD in accordance with the provisions of Clause 23.6.

23.4 Payment during Construction Period

Upon receiving a report from the Independent Engineer certifying the achievement of the below mentioned Payment Milestones[4], the Authority shall disburse, within 15 (fifteen) days of the receipt of each such report, an installment equal to 4% (four per cent) of the Bid Project Cost, adjusted for the Price Index Multiple as applicable on the Reference Index Date preceding the date of that report.

For the purpose of this Clause 23.4, the Payment Milestone for release of payment during Construction Period shall be as under:

a) I (first) Payment Milestone - On achievement of 5% Physical Progress
b) II (second) Payment Milestone - On achievement of 10% Physical Progress
c) III (third) Payment Milestone – On achievement of 20% Physical Progress
d) IV (fourth) Payment Milestone - On achievement of 30% Physical Progress
e) V (fifth) Payment Milestone – On achievement of 40% Physical Progress
f) VI (sixth) Payment Milestone – On achievement of 50% Physical Progress
g) VII (seventh) Payment Milestone – On achievement of 60% Physical Progress
h) VIII (eighth) Payment Milestone – On achievement of 70% Physical Progress
i) IX (ninth) Payment Milestone – On achievement of 80% Physical Progress
j) X (tenth) Payment Milestone – On achievement of 90% Physical Progress

Provided that in case of Change of Scope, the Physical Progress shall be recalculated to account for the changed scope.

23.5 Bonus on early completion

In the event that the Concessionaire shall achieve COD on or more than 30 (thirty) days prior to the Scheduled Completion Date, the Authority shall pay to the Concessionaire a bonus equal to 0.5% (Zero point five per cent) of 60 % (Sixty per cent) of the Bid Project Cost for the first 30 (thirty) days by which COD shall precede the Scheduled Completion Date and thereafter the said bonus shall be calculated on the pro-rata basis for each day preceding the said 30 (thirty) days period. The Bonus shall be due and payable to the Concessionaire alongwith the 1st(first) Annuity Payment.

23.6 Annuity Payments during Operation Period

23.6.1 The (the **"Completion Cost"** shall be the summation of A, B, C, D, E, F, G, H, I, J and K below:

A. 5% of the Bid Project Cost adjusted for the Price Index Multiple as applicable on the Reference Index Date preceding the date of report confirming 5% Physical Progress.
B. Another 5% of the Bid Project Cost adjusted for the Price Index Multiple as applicable on the Reference Index Date preceding the date of report confirming 10% Physical Progress.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep)
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

[4] Independent Engineer, during finalization of design, shall upfront decide weightages of all the activities in consultation with the Authority responsible for making payments and recommended percentage physical progress achievements based on the above decided weightages for the entire construction period. The weightages shall be fixed as per format in Annexure – I of Schedule G of this Agreement.

C. Another 10% of the Bid Project Cost adjusted for the Price Index Multiple as applicable on the Reference Index Date preceding the date of report confirming 20% Physical Progress.
D. Another 10% of the Bid Project Cost adjusted for the Price Index Multiple as applicable on the Reference Index Date preceding the date of report confirming 30% Physical Progress.
E. Another 10% of the Bid Project Cost adjusted for the Price Index Multiple as applicable on the Reference Index Date preceding the date of report confirming 40% Physical Progress.
F. Another 10% of the Bid Project Cost adjusted for the Price Index Multiple as applicable on the Reference Index Date preceding the date of report confirming 50% Physical Progress.
G. Another 10% of the Bid Project Cost adjusted for the Price Index Multiple as applicable on the Reference Index Date preceding the date of report confirming 60% Physical Progress.
H. Another 10% of the Bid Project Cost adjusted for the Price Index Multiple as applicable on the Reference Index Date preceding the date of report confirming 70% Physical Progress.
I. Another 10% of the Bid Project Cost adjusted for the Price Index Multiple as applicable on the Reference Index Date preceding the date of report confirming 80% Physical Progress.
J. Another 10% of the Bid Project Cost adjusted for the Price Index Multiple as applicable on the Reference Index Date preceding the date of report confirming 90% Physical Progress.
K. Another 10% of the Bid Project Cost adjusted for the Price Index Multiple as applicable on the Reference Index Date preceding the COD.

The Parties acknowledge and agree that the Authority has paid a portion of the Completion Cost as payments during Construction Period pursuant to Clause 23.4 of this Agreement. The balance Completion Cost remaining shall be due and payable during the Operation Period in accordance with the provisions of Clause 23.6.2.

23.6.2 The Completion Cost remaining to be paid in pursuance of the provisions of Clause 23.6.1 shall be due and payable in biannual installments over a period of 15 (fifteen) years commencing from COD, (the **"Annuity Payments"**). The 1st (first) installment of Annuity Payments shall be due and payable within 15 (fifteen) days of the 180th(one hundred and eightieth) day of COD and the remaining installments shall be due and payable within 15 (fifteen) days of completion of each of the successive six months ("the **Annuity Payment Date"**). For the avoidance of doubt, the last Annuity Payment Date would be adjusted to in such a way that it falls at the end of the Operations Period.

23.6.3 Each of the Annuity Payments due and payable during the years following the COD shall be as under:

Annuity following the COD	Percentage of Completion Cost remaining to be paid on COD
1st Annuity	2.10%
2nd Annuity	2.17%
3rd Annuity	2.24%
4th Annuity	2.31%
5th Annuity	2.38%

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

6th Annuity	2.45%
7th Annuity	2.52%
8th Annuity	2.60%
9th Annuity	2.68%
10th Annuity	2.76%
11th Annuity	2.84%
12th Annuity	2.93%
13th Annuity	3.02%
14th Annuity	3.11%
15th Annuity	3.20%
16th Annuity	3.30%
17th Annuity	3.40%
18th Annuity	3.50%
19th Annuity	3.61%
20th Annuity	3.72%
21st Annuity	3.83%
22nd Annuity	3.94%
23rd Annuity	4.06%
24th Annuity	4.18%
25th Annuity	4.25%
26th Annuity	4.25%
27th Annuity	4.44%
28th Annuity	4.71%
29th Annuity	4.75%
30th Annuity	4.75%

Each of the biannual installments payable hereunder shall be paid along with interest as specified in Clause 23.6.4.

23.6.4 Interest shall be due and payable on the reducing balance of Completion Cost at an interest rate equal to the average of one year MCLR of top 5 Scheduled Commercial Banks[5] plus 1.25%. Such interest shall be due and payable biannually along with each installment specified in Clause 23.6.3. For the avoidance of doubt and by way of illustration, the Parties agree that interest on the Completion Cost remaining to be paid, calculated from COD and until the 180th (one hundred and eightieth) day of COD, shall be due and payable to the Concessionaire along with the first Annuity Payment and interest on **[6]% (** per cent) of the Percentage of Completion Cost remaining to be paid on COD, calculated from first Annuity payment date and until the 1st (first) anniversary of COD, shall be due and payable along with the second Annuity Payment due and payable under this Agreement. The Parties further agree that interest shall be calculated based on the number of days a particular average of one year MCLR of top 5 Scheduled Commercial Banks was applicable during the period of calculation. For the purpose of illustration, assuming that the balance capital cost remaining to be paid is Rs 100 crores on the 1st Annuity Payment Date, the applicable average of one year MCLR of top 5 Scheduled Commercial Banks for the first 75 days is 8% and thereafter it is revised to 7.5% and remains unchanged till the 2nd Annuity Payment Date, the interest would be calculated as ((100*9.25%*75)/365)+((100*8.75%*105)/365).

Signature Not Verified
Digitally Signed.
Name: HyperPKI_HYP2003_CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name:PROXKey(v3.0 WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

[5] The authority shall declare the list of Top 5 Scheduled Commercial Banks on 1st September every calendar year based on the balance sheet size as declared in their annual reports. The 1 year MCLR of the top 5 scheduled commercial banks shall be taken at the start of every quarter.

[6] To be finalized on the basis of the outstanding Completion Cost Annuity pursuant to the payment of 1st Annuity as provided in the Annuity payment schedule in Clause 23.6.3

For the avoidance of doubt[7], the Interest would be calculated on simple interest basis and no compounding of the same would be undertaken.

23.7 O&M Payments

23.7.1 The Parties acknowledge and agree that all O&M Expenses shall be borne by the Concessionaire and in lieu thereof. For the performance of its Maintenance obligations, a lump sum financial support in the form of biannual payments shall be due and payable by the Authority.

a. For flexible pavement including structures: no maintenance charges shall be paid for the first year; 0.40% of the Bid Project Cost each for the second, third and fourth year; 0.80% of the Bid Project Cost each for the subsequent years till laying of the renewal layer or end of concession period, whichever is earlier. The requirement for the renewal layer shall be worked out based on the survey and investigation of the existing pavement and the cost of such renewal works shall be made separately to the Concessionaire @ 2.4% of Bid Project Cost. After laying of the renewal layer, the Concessionaire shall be paid @0.40% of the original Bid Project Cost each for the next four years and @ 0.80% of the original Bid Project Cost each till laying of the second renewal layer or end of concession period, whichever is earlier. After laying of the renewal layer, the Concessionaire shall be paid @0.40% of the original Bid Project Cost each for the remaining years till the end of concession period. For the avoidance of doubt, it is clarified that if there is any requirement of renewal layer during the initial 5 years & during the 5 years after laying of first renewal layer then the cost of such renewal layer and any requirement of structural layer during the concession period shall be borne solely by concessionaire

b. For flexible perpetual pavement including structures: no maintenance charges shall be paid for the first year; 0.40% of the Bid Project Cost each for the second, third and fourth year; 0.60% of the Bid Project Cost each for the subsequent years till laying of the renewal layer or end of concession period, whichever is earlier. The requirement for the renewal layer shall be worked out based on the survey and investigation of the existing pavement and the cost of such renewal works shall be made separately to the Concessionaire @ 2.4% of Bid Project Cost. After laying of the renewal layer, the Concessionaire shall be paid @ 0.40% of the original Bid Project Cost each for the next four years and @0.60% of the original Bid Project Cost each till laying of the second renewal layer or end of concession period, whichever is earlier. After laying of the renewal layer, the Concessionaire shall be paid @0.40% of the original Bid Project Cost each for the remaining years till the end of concession period. For the avoidance of doubt, it is clarified that if there is any requirement of renewal layer during the initial 5 years & during the 5 years after laying of first renewal layer then the cost of such renewal layer and any requirement of structural layer during the concession period shall be borne solely by concessionaire.

c. For rigid pavement including structures: no maintenance charges shall be paid for the first year; 0.20% of the Bid Project Cost each for the second, third & fourth year, 0.40% of the Bid Project Cost each for fifth, sixth, seventh & eighth year, 0.60% of the Bid Project Cost each till the end of concession period.

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS32307130516179(Pradeep
Signature Not Verified
Digitally Signed,
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

[7] Assuming that the total number of days between 1st Annuity payment date and 2nd Annuity date are 180. In case the number of days are different the calculation may be appropriately changed

d. For stand-alone Bridge/ Tunnel works: no maintenance charges shall be paid for the first year; 0.20% of the Bid Project Cost each for the next five years, 0.40% of the Bid Project Cost each for the remaining years till the end of concession period.

The Parties further acknowledge and agree that any O&M Expenses in excess of the O&M Payments shall be borne solely by the Concessionaire save and except as expressly provided in this Agreement. For avoidance of doubt it is clarified that the O&M Payments will be subject to any Change in Scope of the Project of the Concessionaire under Article 16 of this Agreement.

23.7.2 Above amount for the performance of Contractors' Maintenance obligations shall be, inclusive of all taxes (except GST, which shall be payable at applicable rates). The amount payable for maintenance shall be adjusted on account of variation of Price Index. It is further agreed that the Bid Project Cost hereunder shall be reckoned with reference to the amount specified in Clause 23.1, which shall be adjusted to the extent of Change of Scope and Reduction in Scope, but shall not include any price adjustments in pursuance of variation of Price Index.

23.7.3 Deleted

23.8 Mobilization Advance

The Authority shall, on request of the Concessionaire, make an advance payment in a sum not exceeding 10% (ten per cent) of the Bid Project Cost (the **"Mobilization Advance"**). This advance payment shall be made in two equal instalments. The Concessionaire may request the Authority for the first instalment of the advance payment at any time after the Appointed Date, along with furnishing an e-Bank Guarantee in a form satisfactory to the Authority. The Concessionaire may request the Authority for the second instalment of the advance payment at any time, after 60 (sixty) days from the Appointed Date, along with furnishing an e-Bank Guarantee in a form satisfactory to the Authority. The first and second instalments of the Mobilization Advance shall be paid by the Authority within 30 (thirty) days of receipt of the respective requests in this behalf from the Concessionaire. The rate of interest on the Mobilization Advance shall be equal to the average of one year MCLR of top 5 Scheduled Commercial Banks[8] plus 1.25%, compounded annually. The Mobilization Advance shall be deducted by the Authority in 8 (eight) equal instalments from each of the payments to be made by the Authority to the Concessionaire in accordance with the provisions of Clause 23.4 and the interest thereon shall be recovered from the 9th (ninth) and 10th (tenth) instalments.

As the advance get recovered from the running bills/ stage payments, the e-Bank Guarantee for the amount equivalent to the amount of advance recovered may be released on the request of the Concessionaire.

The Concessionaire would be at liberty to either submit a substitute e-Bank Guarantee for the residual amount or multiple e-Bank Guarantees for such residual amount in replacement of the existing e-Bank Guarantee.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

[8] The authority shall declare the list of Top 5 Scheduled Commercial Banks on 1st September every calendar year based on the balance sheet size as declared in their annual reports. The 1 year MCLR of the top 5 scheduled commercial banks shall be taken at the start of every quarter.

23.9 Treatment of incomplete works

23.9.1 The Parties acknowledge and agree that in the event COD occurs upon issuance of a Provisional Certificate, the Annuity Payments and O&M Payments specified in this Article 23 shall be made as if all works comprising the Project have been completed. The works remaining incomplete shall be completed by the Concessionaire in accordance with the provisions of this Agreement and thereupon, the Completion Certificate shall be issued forthwith.

23.9.2 In the event the Authority determines that any incomplete works referred to in Clause 23.9.1 are not required to be completed for any reason, it shall modify the Scope of the Project in accordance with the provisions of Article 16 and the Completion Cost, Annuity Payments and O&M Payments shall be reduced on account of such Change of Scope as per the provisions of Article 16.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 24

Deleted

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 25

ESCROW ACCOUNT

25.1 Escrow Account

25.1.1 The Concessionaire shall, prior to the Appointed Date, open and establish an Escrow Account with a Bank (the **"Escrow Bank"**) in accordance with this Agreement read with the Escrow Agreement.

25.1.2 The nature and scope of the Escrow Account are fully described in the agreement (the **"Escrow Agreement"**) to be entered into amongst the Concessionaire, the Authority, the Escrow Bank and the Senior Lenders through the Lenders' Representative, which shall be substantially in the form set forth in Schedule-O.

25.2 Deposits into Escrow Account

The Concessionaire shall deposit or cause to be deposited the following inflows and receipts into the Escrow Account:

(a) All funds constituting the Financial Package;

(b) All revenues from or in respect of the Project, including the proceeds of any rentals, deposits, capital receipts or insurance claims; and

(c) All payments by the Authority, after deduction of any outstanding payments.

25.3 Withdrawals during Concession Period

25.3.1 The Concessionaire shall, at the time of opening the Escrow Account, give irrevocable instructions, by way of an Escrow Agreement, to the Escrow Bank instructing, *inter alia*, that deposits in the Escrow Account shall be appropriated in the following order every month, or at shorter intervals as necessary, and if not due in a month then appropriated proportionately in such month and retained in the Escrow Account and paid out therefrom in the month when due:

(a) All taxes due and payable by the Concessionaire for and in respect of the Project;

(b) Deleted;

(c) All payments relating to construction of the Project, subject to and in accordance with the conditions, if any, set forth in the Financing Agreements;

(d) O&M Expenses, subject to the ceiling, if any, set forth in the Financing Agreements;

(e) O&M Expenses and other costs and expenses incurred by the Authority in accordance with the provisions of this Agreement, and certified by the Authority as due and payable to it;

(f) Any amounts due and payable to the Authority (other than under Clause 8.5);

(g) Monthly proportionate provision of Debt Service due in an Accounting Year;

(h) All payments and Damages certified by the Authority as due and payable by the Concessionaire;

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 21 Aug 2024 20:06:49

(i) Monthly proportionate provision of debt service payments due in an Accounting Year in respect of Subordinated Debt;

(j) Any reserve requirements set forth in the Financing Agreements; and

(k) Balance, if any, in accordance with the instructions of the Concessionaire.

25.3.2 The Concessionaire shall not in any manner modify the order of payment specified in Clause 25.3.1, except with the prior written approval of the Authority.

25.4 Withdrawals upon Termination

25.4.1 Notwithstanding anything to the contrary contained in this Agreement, all amounts standing to the credit of the Escrow Account shall, upon Termination, be appropriated in the following order:

(a) All taxes due and payable by the Concessionaire for and in respect of the Project;

(b) Deleted;

(c) Percentage of Debt Due excluding Subordinated Debt if required to be as per the terms of this Agreement;

(d) Outstanding payments due to the Authority;

(e) All payments and Damages certified by the Authority as due and payable to it by the Concessionaire;

(f) Retention and payments relating to the liability for defects and deficiencies set forth in Article 33;

(g) Outstanding Debt Service including the balance of Debt Due;

(h) Outstanding Subordinated Debt;

(i) Incurred or accrued O&M Expenses;

(j) Any other payments required to be made under this Agreement; and

(k) Balance, if any, in accordance with the instructions of the Concessionaire:

Provided that no appropriations shall be made under Sub-clause (k) of this Clause 25.4.1 until a Vesting Certificate has been issued by the Authority under the provisions of Article 32.

25.4.2 The provisions of this Article 25 and the instructions contained in the Escrow Agreement shall remain in full force and effect until the obligations set forth in Clause 25.4.1 have been discharged.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 26

INSURANCE

26.1 Insurance during Concession Period

The Concessionaire shall effect and maintain at its own cost, during the Construction Period and the Operation Period, such insurances for such maximum sums as may be required under the Financing Agreements and Applicable Laws, and such insurances as may be necessary or prudent in accordance with Good Industry Practice. The Concessionaire shall also effect and maintain such insurances as may be necessary for mitigating the risks that may devolve on the Authority as a consequence of any act or omission of the Concessionaire during the Construction Period. The Concessionaire shall procure that in each insurance policy, the Authority shall be a co-insured and that the insurer shall pay the proceeds of insurance into the Escrow Account. For the avoidance of doubt, the level of insurance to be maintained by the Concessionaire after repayment of Senior Lenders' dues in full shall be determined on the same principles as applicable for determining the level of insurance prior to such repayment of Senior Lenders' dues.

26.2 Insurance Cover

Without prejudice to the provisions contained in Clause 26.1, the Concessionaire shall, during the Operation Period, procure and maintain Insurance Cover including but not limited to the following:

(a) Loss, damage or destruction of the Project Assets, including assets handed over by the Authority to the Concessionaire, at replacement value;

(b) Comprehensive third party liability insurance including injury to or death of personnel of the Authority or others caused by the Project;

(c) The Concessionaire's general liability arising out of the Concession;

(d) Liability to third parties for goods or property damage;

(e) Workmen's compensation insurance; and

(f) any other insurance that may be necessary to protect the Concessionaire and its employees, including all Force Majeure Events that are insurable at commercially reasonable premiums and not otherwise covered in items(a) to (e) above.

26.3 Notices to the Authority

No later than 45 (forty five) days prior to commencement of the Construction Period or the Operation Period, as the case may be, the Concessionaire shall by notice furnish to the Authority, in reasonable detail, information in respect of the insurances that it proposes to effect and maintain in accordance with this Article 26. Within 30 (thirty) days of receipt of such notice, the Authority may require the Concessionaire to effect and maintain such other insurances as may be necessary pursuant hereto, and in the event of any difference or disagreement relating to any such insurance, the Dispute Resolution Procedure shall apply.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

26.4 Evidence of Insurance Cover

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

All insurances obtained by the Concessionaire in accordance with this Article 26 shall be maintained with insurers on terms consistent with Good Industry Practice. Within 15

(fifteen) days of obtaining any insurance cover, the Concessionaire shall furnish to the Authority, notarized true copies of the certificate(s) of insurance, copies of insurance policies and premium payment receipts in respect of such insurance, and no such insurance shall be cancelled, modified, or allowed to expire or lapse until the expiration of at least 45 (forty five) days after notice of such proposed cancellation, modification or nonrenewal has been delivered by the Concessionaire to the Authority.

26.5 Remedy for failure to insure

If the Concessionaire shall fail to effect and keep in force all insurances for which it is responsible pursuant hereto, the Authority shall have the option to either keep in force any such insurances, and pay such premier and recover the costs thereof from the Concessionaire, or in the event of computation of a Termination Payment, treat an amount equal to the Insurance Cover as deemed to have been received by the Concessionaire.

26.6 Waiver of subrogation

All insurance policies in respect of the insurance obtained by the Concessionaire pursuant to this Article 26 shall include a waiver of any and all rights of subrogation or recovery of the insurers thereunder against, inter alia, the Authority, and its assigns, successors, undertakings and their subsidiaries, affiliates, employees, insurers and underwriters, and of any right of the insurers to any set-off or counterclaim or any other deduction, whether by attachment or otherwise, in respect of any liability of any such person insured under any such policy or in any way connected with any loss, liability or obligation covered by such policies of insurance.

26.7 Concessionaire's waiver

The Concessionaire hereby further releases, assigns and waives any and all rights of subrogation or recovery against, inter alia, the Authority and its assigns, undertakings and their subsidiaries, affiliates, employees, successors, insurers and underwriters, which the Concessionaire may otherwise have or acquire in or from or in any way connected with any loss, liability or obligation covered by policies of insurance maintained or required to be maintained by the Concessionaire pursuant to this Agreement (other than third party liability insurance policies) or because of deductible clauses in or inadequacy of limits of any such policies of insurance.

26.8 Application of insurance proceeds

The proceeds from all insurance claims, except life and injury, shall be paid to the Concessionaire by credit to the Escrow Account and it shall, notwithstanding anything to the contrary contained in Clause 25.3, apply such proceeds for any necessary repair, reconstruction, reinstatement, replacement, improvement or delivery of the Project, and the balance remaining, if any, shall be applied in accordance with the provisions contained in this behalf in the Financing Agreements.

26.9 Compliance with conditions of insurance policies

The Concessionaire expressly acknowledges and undertakes to fully indemnify the Authority from and against all losses and claims arising from the Concessionaire's failure to comply with conditions imposed by the insurance policies affected in pursuance of this Agreement.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS230713051619(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey (India) PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 27

ACCOUNTS AND AUDIT

27.1 Audited accounts

27.1.1 The Concessionaire shall maintain books of accounts recording all its receipts (including all revenues derived/collected by it from or on account of the Project and/or its use), income, expenditure, payments (including payments from the Escrow Account), assets and liabilities, in accordance with this Agreement, Good Industry Practice, Applicable Laws and Applicable Permits. The Concessionaire shall provide 2 (two) copies of its Balance Sheet, Cash Flow Statement and Profit and Loss Account, along with a report thereon by its Statutory Auditors, within 180 (one hundred and eighty) days of the close of the Accounting Year to which they pertain and such audited accounts, save and except where expressly provided to the contrary, shall form the basis of payments by either Party under this Agreement. The Authority shall have the right to inspect the records of the Concessionaire during office hours and require copies of relevant extracts of books of accounts, duly certified by the Statutory Auditors, to be provided to the Authority for verification of basis of payments, and in the event of any discrepancy or error being found, the same shall be rectified and such rectified account shall form the basis of payments by either Party under this Agreement.

27.1.2 The Concessionaire shall, within 30 (thirty) days of the close of each quarter of an Accounting Year, furnish to the Authority its unaudited financial results in respect of the preceding quarter, in the manner and form prescribed by the Securities and Exchange Board of India for publication of quarterly results by the companies listed on a stock exchange.

27.1.3 On or before the thirty-first day of May each Year, the Concessionaire shall provide to the Authority, for the preceding Accounting Year, a statement duly audited by its Statutory Auditors giving summarized information on revenues derived from the Project, and such other information as the Authority may reasonably require.

27.2 Appointment of auditors

27.2.1 The Concessionaire shall appoint, and have during the subsistence of this Agreement as its Statutory Auditors, a firm chosen by it from the mutually agreed list of 5 (five) reputable firms of chartered accountants (the **"Panel of Chartered Accountants"**), such list to be prepared substantially in accordance with the criteria set forth in Schedule-P. All fees and expenses of the Statutory Auditors shall be borne by the Concessionaire.

27.2.2 The Concessionaire may terminate the appointment of its Statutory Auditors after a notice of 45 (forty five) days to the Authority, subject to the replacement Statutory Auditors being appointed from the Panel of Chartered Accountants.

27.2.3 Notwithstanding anything to the contrary contained in this Agreement, the Authority shall have the right, but not the obligation, to appoint at its cost from time to time and at any time, another firm (the **"Additional Auditors"**) from the Panel of Chartered Accountants to audit and verify all those matters, expenses, costs, realizations and things which the Statutory Auditors are required to do, undertake or certify pursuant to this Agreement.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed by
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

27.3 Certification of claims by Statutory Auditors

Any claim or document provided by the Concessionaire to the Authority in connection with or relating to receipts, income, payments, costs, expenses, accounts or audit, and any matter incidental thereto shall be valid and effective only if certified by its Statutory Auditors. For the avoidance of doubt, such certification shall not be required for exchange of information in the normal course of business including the submission of any periodic information in pursuance of the provisions of this Agreement, save and except where such certification is expressly provided.

27.4 Set-off

In the event any amount is due and payable by the Authority to the Concessionaire, it may set-off any sums payable to it by the Concessionaire and pay the balance remaining. Any exercise by the Authority of its rights under this Clause 27.4 shall be without prejudice to any other rights or remedies available to it under this Agreement or otherwise.

27.5 Dispute resolution

In the event of there being any difference between the findings of the Additional Auditors or the Concurrent Auditors, as the case may be, and the certification provided by the Statutory Auditors, such Auditors shall meet to resolve the differences and if they are unable to resolve the same, such Dispute shall be resolved by the Authority by recourse to the Dispute Resolution Procedure.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Part V

Force Majeure and Termination

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 28

FORCE MAJEURE

28.1 Force Majeure

As used in this Agreement, the expression "Force Majeure" or "Force Majeure Event" shall, save and except as expressly provided otherwise, mean occurrence in India of any or all of Non-Political Event, Indirect Political Event and Political Event, as defined in Clauses 28.2, 28.3 and 28.4 respectively, if it affects the performance by the Party claiming the benefit of Force Majeure (the "Affected Party") of its obligations under this Agreement and which act or event (a) is beyond the reasonable control of the Affected Party, and (b) the Affected Party could not have prevented or overcome by exercise of due diligence and following Good Industry Practice, and (c) has Material Adverse Effect on the Affected Party.

28.2 Non-Political Event

A Non-Political Event shall mean one or more of the following acts or events:

(a) act of God, epidemic, extremely adverse weather conditions, lightning, earthquake, landslide, cyclone, flood, volcanic eruption, chemical or radioactive contamination or ionizing radiation, fire or explosion (to the extent of contamination or radiation or fire or explosion originating from a source external to the Site);

(b) strikes or boycotts (other than those involving the Concessionaire, Contractors or their respective employees/representatives, or attributable to any act or omission of any of them) interrupting supplies and services to the Project for a continuous period of 24 (twenty four) hours and an aggregate period exceeding 7 (seven) days in an Accounting Year, and not being an Indirect Political Event set forth in Clause 28.3;

(c) any failure or delay of a Contractor but only to the extent caused by another Non-Political Event and which does not result in any offsetting compensation being payable to the Concessionaire by or on behalf of such Contractor;

(d) any judgment or order of any court of competent jurisdiction or statutory authority made against the Concessionaire in any proceedings for reasons other than (i) failure of the Concessionaire to comply with any Applicable Law or Applicable Permit, or (ii) on account of breach of any Applicable Law or Applicable Permit or of any contract, or (iii) enforcement of this Agreement, or (iv) exercise of any of its rights under this Agreement by the Authority;

(e) The discovery of geological conditions, toxic contamination or archaeological remains on the Site that could not reasonably have been expected to be discovered through a site inspection; or

(f) Any event or circumstances of a nature analogous to any of the foregoing.

28.3 Indirect Political Event

An Indirect Political Event shall mean one or more of the following acts or events:

(a) An act of war (whether declared or undeclared), invasion, armed conflict or act of foreign enemy, blockade, embargo, riot, insurrection, terrorist or military action, civil commotion or politically motivated sabotage;

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29 Aug 2024 20:06:49

(b) any political or economic upheaval, disturbance, movement, struggle or similar occurrence which could not have been anticipated or foreseen by a prudent person and which causes the construction or operation of the Project to be financially unviable or otherwise not feasible;

(c) industry-wide or State-wide strikes or industrial action for a continuous period of 24 (twenty four) hours and exceeding an aggregate period of 7 (seven) days in an Accounting Year;

(d) Deleted

(e) failure of the Authority to permit the Concessionaire to continue its Construction Works, with or without modifications, in the event of stoppage of such works after discovery of any geological or archaeological finds or for any other reason;

(f) Any failure or delay of a Contractor to the extent caused by any Indirect Political Event and which does not result in any offsetting compensation being payable to the Concessionaire by or on behalf of such Contractor;

(g) Any Indirect Political Event that causes a Non-Political Event; or

(h) Any event or circumstances of a nature analogous to any of the foregoing.

28.4 Political Event

A Political Event shall mean one or more of the following acts or events by or on account of any Government Instrumentality:

(a) Change in Law, only if consequences thereof cannot be dealt with under and in accordance with the provisions of Article 35 and its effect, in financial terms, exceeds the sum specified in Clause 35.1;

(b) Compulsory acquisition in national interest or expropriation of any Project Assets or rights of the Concessionaire or of the Contractors;

(c) unlawful or unauthorized or without jurisdiction revocation of, or refusal to renew or grant without valid cause, any clearance, license, permit, authorization, no objection certificate, consent, approval or exemption required by the Concessionaire or any of the Contractors to perform their respective obligations under this Agreement and the Project Agreements; provided that such delay, modification, denial, refusal or revocation did not result from the Concessionaire's or any Contractor's inability or failure to comply with any condition relating to grant, maintenance or renewal of such clearance, license, authorization, no objection certificate, exemption, consent, approval or permit;

(d) any failure or delay of a Contractor but only to the extent caused by another Political Event and which does not result in any offsetting compensation being payable to the Concessionaire by or on behalf of such Contractor; or

(e) Any event or circumstance of a nature analogous to any of the foregoing.

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516179(Pradesh)
Signature Not Verified
Digitally Signed,
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2014 20:06:49

28.5 Duty to report Force Majeure Event

28.5.1 Upon occurrence of a Force Majeure Event, the Affected Party shall by notice report such occurrence to the other Party forthwith. Any notice pursuant hereto shall include full particulars of:

(a) The nature and extent of each Force Majeure Event which is the subject of any claim for relief under this Article 28 with evidence in support thereof;

(b) The estimated duration and the effect or probable effect which such Force Majeure Event is having or will have on the Affected Party's performance of its obligations under this Agreement;

(c) the measures which the Affected Party is taking or proposes to take for alleviating the impact of such Force Majeure Event; an

(d) Any other information relevant to the Affected Party's claim.

28.5.2 The Affected Party shall not be entitled to any relief for or in respect of a Force Majeure Event unless it shall have notified the other Party of the occurrence of the Force Majeure Event as soon as reasonably practicable, and in any event no later than 7 (seven) days after the Affected Party knew, or ought reasonably to have known, of its occurrence, and shall have given particulars of the probable material effect that the Force Majeure Event is likely to have on the performance of its obligations under this Agreement.

28.5.3 For so long as the Affected Party continues to claim to be materially affected by such Force Majeure Event, it shall provide the other Party with regular (and not less than weekly) reports containing information as required by Clause 28.5.1, and such other information as the other Party may reasonably request the Affected Party to provide.

28.6 Effect of Force Majeure Event on the Concession

28.6.1 Upon the occurrence of any Force Majeure Event prior to the Appointed Date, the period set forth in Clause 4.1 for fulfillment of Conditions Precedent and in Clause 22.1.1 for achieving Financial Close shall be extended by a period equal in length to the duration of the Force Majeure Event.

28.6.2 at any time after the Appointed Date, if any Force Majeure Event occurs:

(a) before COD, the Construction Period and the dates set forth in the Project Completion Schedule shall be extended by a period equal in length to the duration for which such Force Majeure Event subsists; or

(b) After COD, the Concessionaire shall be entitled to receive Annuity Payments plus interest due and payable under this Agreement.

Provided any payment to be made under this clause shall be subject to deduction of outstanding dues of the Authority, if any.

28.7 Allocation of costs arising out of Force Majeure

28.7.1 Upon occurrence of any Force Majeure Event prior to the Appointed Date, the Parties shall bear their respective costs and no Party shall be required to pay to the other Party any costs thereof.

28.7.2 Upon occurrence of a Force Majeure Event after the Appointed Date, the costs incurred and attributable to such event and directly relating to the Project (the **"Force Majeure Costs"**) shall be allocated and paid as follows:

(a) upon occurrence of a Non-Political Event, the Parties shall bear their respective Force Majeure Costs and neither Party shall be required to pay to the other Party any costs thereof;

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS230713051619(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD0911496(M/S PROXKey)
Date: 29-Aug-2024 20:06:49

(b) upon occurrence of an Indirect Political Event, all Force Majeure Costs attributable to such Indirect Political Event, and not exceeding the Insurance Cover for such Indirect Political Event, shall be borne by the Concessionaire, and to the extent Force Majeure Costs exceed such Insurance Cover, one half of such excess amount shall be reimbursed by the Authority to the Concessionaire; and

(c) Upon occurrence of a Political Event, all Force Majeure Costs attributable to such Political Event shall be reimbursed by the Authority to the Concessionaire.

For the avoidance of doubt, Force Majeure Costs may include interest payments on Debt Due, O&M Expenses, any increase in the cost of Construction Works on account of inflation and all other costs directly attributable to the Force Majeure Event, but shall not include any costs which are expressly covered under any provision of this Agreement or debt repayment obligations, and for determining such costs, information contained in the Financial Package may be relied upon to the extent that such information is relevant.

28.7.3 Save and except as expressly provided in this Article 28, neither Party shall be liable in any manner whatsoever to the other Party in respect of any loss, damage, cost, expense, claims, demands and proceedings relating to or arising out of occurrence or existence of any Force Majeure Event or exercise of any right pursuant hereto.

28.8 Termination Notice for Force Majeure Event

If a Force Majeure Event subsists for a period of 180 (one hundred and eighty) days or more within a continuous period of 365 (three hundred and sixty five)days, either Party may in its discretion terminate this Agreement by issuing a Termination Notice to the other Party without being liable in any manner whatsoever, save as provided in this Article 28, and upon issue of such Termination Notice, this Agreement shall, notwithstanding anything to the contrary contained herein, stand terminated forthwith; provided that before issuing such Termination Notice, the Party intending to issue the Termination Notice shall inform the other Party of such intention and grant 15 (fifteen) day's time to make a representation, and may after the expiry of such 15 (fifteen) days period, whether or not it is in receipt of such representation, in its sole discretion issue the Termination Notice.

28.9 Termination Payment for Force Majeure Event

28.9.1 If Termination is on account of a Non-Political Event, the Authority shall make a Termination Payment to the Concessionaire in an amount to be calculated as under:

(i) Prior to COD:

Payment Milestone	Basis of calculation for termination payment
1st Payment Milestone	**90% Debt Due or 0.68% of Bid Project Cost , whichever is lower**
2nd Payment Milestone	**90% Debt Due or 1.35% of Bid Project Cost , whichever is lower**
3rd Payment Milestone	**90% Debt Due or 5.40% of Bid Project Cost , whichever is lower**
4th Payment Milestone	**90% Debt Due or 9.45% of Bid Project Cost , whichever is lower**
5th Payment Milestone	**90% Debt Due or 13.50% of Bid Project Cost , whichever is lower**

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed,
Name: PROXKey V 3.0-W0056 Madhya Pradesh (PROXKey)
Date: 29-Aug-2024 20:06:49

6th Payment Milestone	**90% Debt Due or 17.55% of Bid Project Cost , whichever is lower**
7th Payment Milestone	**90% Debt Due or 21.60% of Bid Project Cost , whichever is lower**
8th Payment Milestone	**90% Debt Due or 25.65% of Bid Project Cost , whichever is lower**
9th Payment Milestone	**90% Debt Due or 29.70% of Bid Project Cost , whichever is lower**
10th Payment Milestone	**90% Debt Due or 33.75% of Bid Project Cost , whichever is lower**

For the avoidance of doubt, it is clarified that in case of termination happening in between two Payment Milestones, for the purpose of calculation of termination payment, the milestone achieved would only be considered; provided further the above payment so calculated above shall be reduced by Insurance Cover.

(ii) In case Termination occurs on or after COD, the Authority shall make a Termination Payment to the Concessionaire in an amount equal to 75% (seventy five percent) of Annuity Payments remaining unpaid for and in respect of the remaining Concession Period, including interest thereon up to the Transfer Date. Provided further the above payment so calculated above shall be reduced by Insurance Cover.

28.9.2 If Termination is on account of an Indirect Political Event, the Authority shall make a Termination Payment to the Concessionaire in an amount equal to:

(i) In case termination occurs prior to COD:

(a) Debt Due payment calculated as per the table below less Insurance Cover; provided that if any insurance claims forming part of the Insurance Cover are not admitted and paid, then 80% (eighty per cent) of such unpaid claims shall be included in the computation of Debt Due. Further the Debt Due would be calculated as per the table provided below:

Payment Milestone	Basis of calculation for Debt Due payment
1st Payment Milestone	Debt Due or 0.75% of Bid Project Cost , whichever is lower
2nd Payment Milestone	Debt Due or 1.50% of Bid Project Cost , whichever is lower
3rd Payment Milestone	Debt Due or 6.00% of Bid Project Cost , whichever is lower
4th Payment Milestone	Debt Due or 10.50% of Bid Project Cost , whichever is lower
5th Payment Milestone	Debt Due or 15.00% of Bid Project Cost , whichever is lower
6th Payment Milestone	Debt Due or 19.50% of Bid Project Cost , whichever is lower
7th Payment Milestone	Debt Due or 24.00% of Bid Project Cost , whichever is lower
8th Payment Milestone	Debt Due or 28.50% of Bid Project Cost , whichever is lower
9th Payment Milestone	Debt Due or 33.00% of Bid Project Cost , whichever is lower
10th Payment Milestone	Debt Due or 37.50% of Bid Project Cost , whichever is lower

For the avoidance of doubt, it is clarified that in case of termination happening in between two Payment Milestones, for the purpose of calculation of Debt Due, the milestone achieved would only be considered ; and

(b) 110% (one hundred and ten per cent) of the Adjusted Equity;

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed,
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

(ii) In case Termination occurs on or after COD, the Authority shall make a Termination Payment to the Concessionaire in an amount equal to 90% (ninety percent) of Annuity Payments remaining unpaid for and in respect of the remaining Concession Period, including interest thereon up to the Transfer Date.

28.9.3 If Termination is on account of a Political Event, the Authority shall make a Termination Payment to the Concessionaire in an amount that would be payable under Clause 31.3.3 as if it were an Authority Default.

28.10 Dispute resolution

In the event that the Parties are unable to agree in good faith about the occurrence or existence of a Force Majeure Event, such Dispute shall be finally settled in accordance with the Dispute Resolution Procedure; provided that the burden of proof as to the occurrence or existence of such Force Majeure Event shall be upon the Party claiming relief and/or excuse on account of such Force Majeure Event

28.11 Excuse from performance of obligations

If the Affected Party is rendered wholly or partially unable to perform its obligations under this Agreement because of a Force Majeure Event, it shall be excused from performance of such of its obligations to the extent it is unable to perform on account of such Force Majeure Event; provided that:

(a) The suspension of performance shall be of no greater scope and of no longer duration than is reasonably required by the Force Majeure Event;

(b) the Affected Party shall make all reasonable efforts to mitigate or limit damage to the other Party arising out of or as a result of the existence or occurrence of such Force Majeure Event and to cure the same with due diligence; and

(c) When the Affected Party is able to resume performance of its obligations under this Agreement, it shall give to the other Party notice to that effect and shall promptly resume performance of its obligations hereunder.

28.12 Deleted

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 29

COMPENSATION FOR BREACH OF AGREEMENT

29.1 Compensation for default by the Concessionaire

Subject to the provisions of Clause 29.4, in the event of the Concessionaire being in material breach or default of this Agreement, it shall pay to the Authority by way of compensation, all direct costs suffered or incurred by the Authority as a consequence of such material breach or default, within 30 (thirty) days of receipt of the demand supported by necessary particulars thereof; provided that no compensation shall be payable under this Clause 29.1 for any material breach or default in respect of which Damages are expressly specified and payable under this Agreement or for any consequential losses incurred by the Authority.

29.2 Compensation for default by the Authority

Subject to the provisions of Clause 29.4, in the event of the Authority being in material breach or default of this Agreement at any time after the Appointed Date, it shall pay to the Concessionaire by way of compensation, all direct costs suffered or incurred by the Concessionaire as a consequence of such material breach or default within 30 (thirty) days of receipt of the demand supported by necessary particulars thereof; provided that no such compensation shall be payable for any material breach or default in respect of which Damages have been expressly specified in this Agreement. For the avoidance of doubt, compensation payable may include interest payments on debt, O&M Expenses, any increase in capital costs on account of inflation and all other costs directly attributable to such material breach or default but shall not include loss of Annuity Payments, debt repayment obligations or other consequential losses, loss of profit, EPC Contractors claims, and for determining such compensation, information contained in the Financial Package and the Financial Model may be relied upon to the extent it is relevant.

29.3 Deleted

29.4 Mitigation of costs and damage

The Affected Party shall make all reasonable efforts to mitigate or limit the costs and damage arising out of or as a result of breach of Agreement by the other Party.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 30

SUSPENSION OF CONCESSIONAIRE'S RIGHTS

30.1 Suspension upon Concessionaire Default

Upon occurrence of a Concessionaire Default, the Authority shall be entitled, without prejudice to its other rights and remedies under this Agreement including its rights of Termination hereunder, to (a) suspend all rights of the Concessionaire under this Agreement, and pursuant hereto, and (b) exercise such rights itself and perform the obligations hereunder or authorize any other person to exercise or perform the same on its behalf during such suspension (the "Suspension"). Suspension hereunder shall be effective forthwith upon issue of notice by the Authority to the Concessionaire and may extend up to a period not exceeding 180 (one hundred and eighty) days from the date of issue of such notice; provided that upon written request from the Concessionaire and the Lenders' Representative, the Authority shall extend the aforesaid period of 180 (one hundred and eighty) days by a further period not exceeding 90 (ninety) days.

30.2 Authority to act on behalf of Concessionaire

30.2.1 During the period of Suspension, the Authority shall, on behalf of the Concessionaire, collect all revenues under and in accordance with this Agreement and deposit the same in the Escrow Account. The Authority shall be entitled to make withdrawals from the Escrow Account for meeting the O&M Expenses and for meeting the costs incurred by it for remedying and rectifying the cause of Suspension, and thereafter for defraying the expenses specified in Clause25.3.

30.2.2 During the period of Suspension hereunder, all rights and liabilities vested in the Concessionaire in accordance with the provisions of this Agreement shall continue to vest in the Concessionaire and all things done or actions taken, including expenditure incurred by the Authority for discharging the obligations of the Concessionaire under and in accordance with this Agreement and the Project Agreements, shall be deemed to have been done or taken for and on behalf of the Concessionaire and the Concessionaire undertakes to indemnify the Authority for all costs incurred- during such period. The Concessionaire hereby licenses and sub-licenses respectively, the Authority or any other person authorized by it under Clause 30.1 to use during Suspension, all Intellectual Property belonging to or licensed to the Concessionaire with respect to the Project and its design, engineering, construction, operation and maintenance, and which is used or created by the Concessionaire in performing its obligations under the Agreement.

30.3 Revocation of Suspension

30.3.1 In the event that the Authority shall have rectified or removed the cause of Suspension within a period not exceeding 90 (ninety) days from the date of Suspension, it shall revoke the Suspension forthwith and restore all rights of the Concessionaire under this Agreement. For the avoidance of doubt, the Parties expressly agree that the Authority may, in its discretion, revoke the Suspension at any time, whether or not the cause of Suspension has been rectified or removed hereunder.

30.3.2 Upon the Concessionaire having cured the Concessionaire Default within a period not exceeding 90 (ninety) days from the date of Suspension, the Authority shall revoke the Suspension forthwith and restore all rights of the Concessionaire under this Agreement.

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619179(Pradeep
Signature Not Verified
Digitally Signed,
Name: PROXKey v7.3.0-WD056114961(WD PROXKey)
Date: 29 Aug 2014 20:06:49

30.4 Substitution of Concessionaire

At any time during the period of Suspension, the Lenders' Representative, on behalf of Senior Lenders, shall be entitled to substitute the Concessionaire under and in accordance with the Substitution Agreement, and upon receipt of notice thereunder from the Lenders' Representative, the Authority shall withhold Termination for a period not exceeding 180 (one hundred and eighty) days from the date of Suspension, and any extension thereof under Clause 30.1, for enabling the Lenders' Representative to exercise its rights of substitution on behalf of Senior Lenders.

30.5 Termination

30.5.1 At any time during the period of Suspension under this Article 30, the Concessionaire may by notice require the Authority to revoke the Suspension and issue a Termination Notice. Subject to the rights of the Lenders' Representative to undertake substitution in accordance with the provisions of this Agreement and within the period specified in Clause 30.4, the Authority shall, within 15 (fifteen) days of receipt of such notice, terminate this Agreement under and in accordance with Article 31 as if it is a Concessionaire Default under Clause 31.1.

30.5.2 Notwithstanding anything to the contrary contained in this Agreement, in the event that Suspension is not revoked within 180 (one hundred and eighty) days from the date of Suspension hereunder or within the extended period, if any, set forth in Clause 30.1, the Concession Agreement shall, upon expiry of the aforesaid period, be deemed to have been terminated by mutual agreement of the Parties and all the provisions of this Agreement shall apply, mutatis mutandis, to such Termination as if a Termination Notice had been issued by the Authority upon occurrence of a Concessionaire Default.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 31

TERMINATION

31.1 Termination for Concessionaire Default

31.1.1 Save as otherwise provided in this Agreement, in the event that any of the defaults specified below shall have occurred, and the Concessionaire fails to cure the default within the Cure Period set forth below, or where no Cure Period is specified, then within a Cure Period of 60 (sixty) days, the Concessionaire shall be deemed to be in default of this Agreement (the "**Concessionaire Default**"), unless the default has occurred as a result of any breach of this Agreement by the Authority or due to Force Majeure. The defaults referred to herein shall include the following:

(a) The Performance Security has been encashed and appropriated in accordance with Clause 9.2 and the Concessionaire fails to replenish or provide fresh Performance Security within a Cure Period of 15 (fifteen) days;

(b) subsequent to the replenishment or furnishing of fresh Performance Security in accordance with Clause 9.2, the Concessionaire fails to meet any Condition Precedent or cure the Concessionaire Default, as the case may be, for which whole or part of the Performance Security was appropriated, within a Cure Period of 120 (one hundred and twenty) days;

(c) the Concessionaire does not achieve the latest outstanding Project Milestone due in accordance with the provisions of Schedule-G and continues to be in default for 120 (one hundred and twenty) days;

(d) The Concessionaire abandons or manifests intention to abandon the construction or operation of the Project without the prior written consent of the Authority;

(e) COD does not occur within the period specified in Clause 12.3.3;

(f) the Punch List items have not been completed within the period set forth in Clause 14.4.1;

(g) the Concessionaire is in breach of the Maintenance Requirements or the Safety Requirements, as the case may be;

(h) the Concessionaire has failed to make any payment to the Authority within the period specified in this Agreement;

(i) an Escrow Default has occurred and the Concessionaire fails to cure the default within a Cure Period of 15 (fifteen) days;

(j) upon occurrence of a Financial Default, the Lenders' Representative has by notice required the Authority to undertake Suspension or Termination, as the case may be, in accordance with the Substitution Agreement and the Concessionaire fails to cure the default within the Cure Period specified hereinabove;

(k) a breach of any of the Project Agreements by the Concessionaire has caused a Material Adverse Effect;

(l) the Concessionaire creates any Encumbrance in breach of this Agreement;

(m) the Concessionaire repudiates this Agreement or otherwise takes any action or evidences or conveys an intention not to be bound by the Agreement;

(n) a Change in Ownership has occurred in breach of the provisions of Clause [illegible];

(o) there is a transfer, pursuant to law either of (i) the rights and/or obligations of the Concessionaire under any of the Project Agreements, or of (ii) all or part of the assets or undertaking of the Concessionaire, and such transfer causes a Material Adverse Effect;

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619(Pradeep

Signature Not Verified
Digitally Signed
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29 Aug 2024 20:06:49

(p) an execution levied on any of the assets of the Concessionaire has caused a Material Adverse Effect;

(q) the Concessionaire is adjudged bankrupt or insolvent, or if a trustee or receiver is appointed for the Concessionaire or for the whole or material part of its assets that has a material bearing on the Project;

(r) the Concessionaire has been, or is in the process of being liquidated, dissolved, wound-up, amalgamated or reconstituted in a manner that would cause, in the reasonable opinion of the Authority, a Material Adverse Effect;

(s) a resolution for winding up of the Concessionaire is passed, or any petition for winding up of the Concessionaire is admitted by a court of competent jurisdiction and a provisional liquidator or receiver is appointed and such order has not been set aside within 90 (ninety) days of the date thereof or the Concessionaire is ordered to be wound up by a court except for the purpose of amalgamation or reconstruction; provided that, as part of such amalgamation or reconstruction, the entire property, assets and undertaking of the Concessionaire are transferred to the amalgamated or reconstructed entity and that the amalgamated or reconstructed entity has unconditionally assumed the obligations of the Concessionaire under this Agreement and the Project Agreements; and provided that:

(I) the amalgamated or reconstructed entity has the capability and operating experience necessary for the performance of its obligations under this Agreement and the Project Agreements;

(ii) the amalgamated or reconstructed entity has the financial standing to perform its obligations under this Agreement and the Project Agreements and has a credit worthiness at least as good as that of the Concessionaire as at the Appointed Date; and

(iii) Each of the Project Agreements remains in full force and effect;

(t) any representation or warranty of the Concessionaire herein contained which is, as of the date hereof, found to be materially false, incorrect or misleading or the Concessionaire is at any time hereafter found to be in breach thereof;

(u) the Concessionaire submits to the Authority any statement, notice or other document, in written or electronic form, which has a material effect on the Authority's rights, obligations or interests and which is false in material particulars;

(v) the Concessionaire has failed to fulfill any obligation, for which failure Termination has been specified in this Agreement;

(w) the Concessionaire issues a Termination Notice in violation of this Agreement;

(x) the Concessionaire commits a default in complying with any other provision of this Agreement if such default causes a Material Adverse Effect on the Authority.

31.1.2 Without prejudice to any other rights or remedies which the Authority may have under this Agreement, upon occurrence of a Concessionaire Default, the Authority shall be entitled to terminate this Agreement by issuing a Termination Notice to the Concessionaire; provided that before issuing the Termination Notice, the Authority shall by a notice inform the Concessionaire of its intention to issue such Termination Notice and grant 15 (fifteen) days to the Concessionaire to make a representation, and may after the expiry of such 15 (fifteen) days, whether or not it is in receipt of such representation, issue the Termination Notice, subject to the provisions of Clause 31.1.3.

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516179(Pradeep

31.1.3 The Authority shall, if there be Senior Lenders, send a copy of its Notice to inform the Lenders' Representative and grant 15 (fifteen) days to the Lenders' Representative, for making a

Signature Not Verified
Digitally Signed,
Name: PROXKey V 3.0-WDSS104[illegible] PROXKey)
Date: 29-Aug-2024 20:06:49

representation on behalf of the Senior Lenders stating the intention to substitute the Concessionaire in accordance with the Substitution Agreement. In the event the Authority receives such representation on behalf of Senior Lenders, it shall, in its discretion, either withhold Termination for a period not exceeding 180 (one hundred and eighty) days from the date of such representation or exercise its right of Suspension, as the case may be, for enabling the Lenders' Representative to exercise the Senior Lenders' right of substitution in accordance with the Substitution Agreement:

Provided that the Lenders' Representative may, instead of exercising the Senior Lenders' right of substitution, procure that the default specified in the notice is cured within the aforesaid period of 180 (one hundred and eighty) days, and upon such curing thereof, the Authority shall withdraw its notice referred to above and restore all the rights of the Concessionaire.

Provided further that upon written request from the Lenders' Representative and the Concessionaire, the Authority shall extend the aforesaid period of 180 (one hundred and eighty) days by such further period not exceeding 90 (ninety) days, as the Authority may deem appropriate.

31.2 Termination for Authority Default

31.2.1 In the event that any of the defaults specified below shall have occurred, and the Authority fails to cure such default within a Cure Period of 90 (ninety) days or such longer period as has been expressly provided in this Agreement, the Authority shall be deemed to be in default of this Agreement (the **"Authority Default"**) unless the default has occurred as a result of any breach of this Agreement by the Concessionaire or due to Force Majeure. The defaults referred to herein shall include the following:

(a) The Authority commits a material default in complying with any of the provisions of this Agreement and such default has a Material Adverse Effect on the Concessionaire;

(b) The Authority has failed to make any payment to the Concessionaire within the period specified in this Agreement;

(c) The Authority fails to provide, within a period of 180 (one hundred and eighty days) from the Appointed Date, statutory clearances required for construction of the Project; or

(d) The Authority repudiates this Agreement or otherwise takes any action that amounts to or manifests an irrevocable intention not to be bound by this Agreement.

31.2.2 Without prejudice to any other right or remedy which the Concessionaire may have under this Agreement, upon occurrence of an Authority Default, the Concessionaire shall, subject to the provisions of the Substitution Agreement, be entitled to terminate this Agreement by issuing a Termination Notice to the Authority; provided that before issuing the Termination Notice, the Concessionaire shall by a notice inform the Authority of its intention to issue the Termination Notice and grant 15 (fifteen) days to the Authority to make a representation, and may after the expiry of such 15 (fifteen) days, whether or not it is in receipt of such representation, issue the Termination Notice.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey v 3.0 WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

31.3 Termination Payment

31.3.1 Upon Termination on account of a Concessionaire Default during the Operation Period, the Authority shall pay to the Concessionaire, by way of Termination Payment, an amount equal to 65% (sixty five per cent) of the sum of Annuity Payments remaining unpaid for and in respect of the Concession Period, including interest thereon up to the Transfer Date.

31.3.2 Notwithstanding to the provisions of Clause 31.3.1 upon Termination on account of Concessionaire Default during the Construction Period, the Termination Payment shall be based on the Payment Milestone achieved which is in terms of the Physical Progress made by the Concessionaire in the Project and the Termination Payment corresponding to the achieved Payment Milestone shall be as follows:

Payment Milestone	Basis of calculation for Termination Payment
1st Payment Milestone	NIL
2nd Payment Milestone	NIL
3rd Payment Milestone	50% of Debt Due or 3.00% of Bid Project Cost , whichever is lower
4th Payment Milestone	55% of Debt Due or 5.78% of Bid Project Cost , whichever is lower
5th Payment Milestone	60% of Debt Due or 9.00% of Bid Project Cost , whichever is lower
6th Payment Milestone	65% of Debt Due or 12.68% of Bid Project Cost , whichever is lower
7th Payment Milestone	70% of Debt Due or 16.80% of Bid Project Cost , whichever is lower
8th Payment Milestone	75% of Debt Due or 21.38% of Bid Project Cost , whichever is lower
9th Payment Milestone	80% of Debt Due or 26.40% of Bid Project Cost , whichever is lower
10th Payment Milestone	85% of Debt Due or 31.88% of Bid Project Cost , whichever is lower

For the avoidance of doubt, it is clarified that in case of termination happening in between two Payment Milestones, for the purpose of calculation of Termination Payment, the milestone achieved would only be considered.

31.3.3 Upon Termination on account of an Authority Default, the Authority shall pay to the Concessionaire, by way of Termination Payment, an amount equal to:

(i) In case the termination occurs prior to COD

(a) Debt Due payment calculated as per the table below less Insurance Cover; provided that if any insurance claims forming part of the Insurance Cover are not admitted and paid, then 80% (eighty per cent) of such unpaid claims shall be included in the computation of Debt Due. Further the Debt Due would be calculated as per the table provided below:

Payment Milestone	Basis of calculation for Debt Due payment
1st Payment Milestone	Debt Due or 0.75% of Bid Project Cost, whichever is lower
2nd Payment Milestone	Debt Due or 1.50% of Bid Project Cost , whichever is lower
3rd Payment Milestone	Debt Due or 6.00% of Bid Project Cost , whichever is lower
4th Payment Milestone	Debt Due or 10.50% of Bid Project Cost, whichever is lower
5th Payment Milestone	Debt Due or 15.00% of Bid Project Cost, whichever is lower
6th Payment Milestone	Debt Due or 19.50% of Bid Project Cost, whichever is lower

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed,
Name: PROXKey WD056114960(WD PROXKey)
Date: 29 Aug 2024 20:06:49

7th Payment Milestone	Debt Due or 24.00% of Bid Project Cost, whichever is lower
8th Payment Milestone	Debt Due or 28.50% of Bid Project Cost, whichever is lower
9th Payment Milestone	Debt Due or 33.00% of Bid Project Cost, whichever is lower
10th Payment Milestone	Debt Due or 37.50% of Bid Project Cost, whichever is lower

For the avoidance of doubt, it is clarified that in case of termination happening in between two Payment Milestones, for the purpose of calculation of Debt Due, the milestone achieved would only be considered; and

(b) 150% (one hundred and fifty per cent) of the Adjusted Equity;

(ii) In case the termination occurs on or after COD, the Authority shall pay to the Concessionaire, by way of Termination Payment, an amount equal to sum of Annuity Payments remaining unpaid for and in respect of the Concession Period, including interest thereon up to the Transfer Date.

31.3.4 Termination Payment shall become due and payable to the Concessionaire within 15 (fifteen) days of a demand being made by the Concessionaire to the Authority with the necessary particulars, and in the event of any delay, the Authority shall pay interest at a rate equal to 3% (three per cent) above the daily average Bank Rate on the amount of Termination Payment remaining unpaid; provided that such delay shall not exceed 90 (ninety) days. For the avoidance of doubt, it is expressly agreed that Termination Payment shall constitute full discharge by the Authority of its payment obligations in respect thereof hereunder.

31.3.5 The Concessionaire expressly agrees that Termination Payment under this Article 31 shall constitute a full and final settlement of all claims of the Concessionaire on account of Termination of this Agreement for any reason whatsoever and that the Concessionaire or any shareholder thereof shall not have any further right or claim under any law, treaty, convention, contract or otherwise.

31.4 Certain limitations on Termination Payment

31.4.1 During the Construction Period, Termination Payment due and payable under this Agreement shall be computed with reference to the Debt Due in accordance with the provisions of this Agreement. The Parties also agree that for the purposes of computing Termination Payment, the Debt Due shall at no time exceed 85% (eighty five per cent) of the Total Project Cost.

31.4.2 The amount payable in respect of any Debt Due expressed in foreign currency shall be computed at the Reference Exchange Rate for conversion into the relevant foreign currency as on the date of Termination Payment. Provided further that all borrowings in foreign currency shall be restricted to the financing of Total Project Cost and any borrowings in excess thereof shall not qualify for computation of Termination Payment. It is clarified that the rate of conversion of such foreign currency shall be calculated on the date on which the Agreement is terminated.

31.5 Other rights and obligations of the Authority

Upon Termination for any reason whatsoever, the Authority shall:

(a) Be deemed to have taken possession and control of the Project forthwith;

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed,
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

(b) Take possession and control of all materials, stores, implements, construction plants and equipment on or about the Site;

(c) Be entitled to restrain the Concessionaire and any person claiming through or under the Concessionaire from entering upon the Site or any part of the Project;

(d) Require the Concessionaire to comply with the Divestment Requirements set forth in Clause 32.1; and

(e) succeed upon election by the Authority, without the necessity of any further action by the Concessionaire, to the interests of the Concessionaire under such of the Project Agreements as the Authority may in its discretion deem appropriate, and shall upon such election be liable to the Contractors only for compensation accruing and becoming due and payable to them under the terms of their respective Project Agreements from and after the date the Authority elects to succeed to the interests of the Concessionaire. For the avoidance of doubt, the Concessionaire acknowledges and agrees that all sums claimed by such Contractors as being -due and owing for works and services performed or accruing on account of any act, omission or event prior to such date shall constitute debt between the Concessionaire and such Contractors, and the Authority shall not in any manner be liable for such sums. It is further agreed that in the event the Authority elects to cure any outstanding defaults under such Project Agreements, the amount expended by the Authority for this purpose shall be deducted from the Termination Payment.

31.6 Survival of rights

Notwithstanding anything to the contrary contained in this Agreement, but subject to the provisions of Clause 31.3.5, any Termination pursuant to the provisions of this Agreement shall be without prejudice to the accrued rights of either Party including its right to claim and recover money damages, insurance proceeds, security deposits, and other rights and remedies, which it may have in law or contract. All rights and obligations of either Party under this Agreement, including Termination Payments and Divestment Requirements, shall survive the Termination to the extent such survival is necessary for giving effect to such rights and obligations.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 32

DIVESTMENT OF RIGHTS AND INTEREST

32.1 Divestment Requirements

32.1.1 Upon Termination, the Concessionaire shall comply with and conform to the following Divestment Requirements:

(a) Notify to the Authority forthwith the location and particulars of all Project Assets;

(b) deliver forthwith the actual or constructive possession of the Project, free and clear of all Encumbrances, save and except to the extent set forth in the Substitution Agreement;

(c) cure all Project Assets, including the road, bridges, structures and equipment, of all defects and deficiencies so that the Project is compliant with the Maintenance Requirements; provided that in the event of Termination during the Construction Period, all Project Assets shall be handed over on 'as is where is' basis after bringing them to a safe condition;

(d) deliver and transfer relevant records, reports, Intellectual Property and other licenses pertaining to the Project and its design, engineering, construction, operation and maintenance, including all programmers and manuals pertaining thereto, and complete 'as built' Drawings as on the Transfer Date. For the avoidance of doubt, the Concessionaire represents and warrants that the Intellectual Property delivered hereunder shall be adequate and complete for the design, engineering, construction, operation and maintenance of the Project and shall be assigned to the Authority free of any Encumbrance;

(e) Transfer and/or deliver all Applicable Permits to the extent permissible under Applicable Laws;

(f) execute such deeds of conveyance, documents and other writings as the Authority may reasonably require for conveying, divesting and assigning all the rights, title and interest of the Concessionaire in the Project Assets, including manufacturers' warranties in respect of any plant or equipment and the right to receive outstanding insurance claims to the extent due and payable to the Authority, absolutely unto the Authority or its nominee; and

(g) Comply with all other requirements as may be prescribed or required under Applicable Laws for completing the divestment and assignment of all rights, title and interest of the Concessionaire in the Project, free from all Encumbrances, absolutely unto the Authority or to its nominee.

32.1.2 Subject to the exercise by the Authority of its rights under this Agreement or under any of the Project Agreements to perform or procure the performance by a third party of any of the obligations of the Concessionaire, the Parties shall continue to perform their obligations under this Agreement, notwithstanding the issuance of any Termination Notice, until the Termination of this Agreement becomes effective in accordance with its terms.

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed,
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

32.2 Inspection and cure

Not earlier than 90 (ninety) days prior to Termination but not later than 15 (fifteen) days prior to the effective date of such Termination, the Independent Engineer shall verify, after giving due notice to the Concessionaire specifying the time, date and place of such verification and/or inspection, compliance by the Concessionaire with the Maintenance Requirements, and if required, cause appropriate tests to be carried out at the Concessionaire's cost for this purpose. Defaults, if any, in the Maintenance Requirements shall be cured by the Concessionaire at its cost and the provisions of Article 33 shall apply, mutatis mutandis, in relation to curing of defects or deficiencies under this Article 32.

32.3 Cooperation and assistance on transfer of Project

32.3.1 The Parties shall cooperate on a best effort basis and take all necessary measures, in good faith, to achieve a smooth transfer of the Project in accordance with the provisions of this Agreement so as to protect the safety of and avoid undue delay or inconvenience to the Users, other members of the public or the lawful occupiers of any part of the Site.

32.3.2 The Parties shall provide to each other, 9 (nine) months prior to the Transfer Date in the event of Termination by efflux of time and immediately in the event of either Party conveying to the other Party its intent to issue a Termination Notice, as the case may be, as much information and advice as is reasonably practicable regarding the proposed arrangements for operation of the Project following the Transfer Date. The Concessionaire shall further provide such reasonable advice and assistance as the Authority, its concessionaire or agent may reasonably require for operation of the Project until the expiry of 6 (six) months after the Transfer Date.

32.3.3 The Authority shall have the option to purchase or hire from the Concessionaire at a fair market value and free from any encumbrance all or any part of the plant and machinery used in connection with the Project but which does not form part of the assets specified in Clause 32.1.1 and is reasonably required in connection with operation of the Project. For the avoidance of doubt, in the event of dispute or difference relating to fair market value, the Dispute Resolution Procedure shall apply.

32.4 Vesting Certificate

The divestment of all rights, title and interest in the Project shall be deemed to be complete on the date when all of the Divestment Requirements have been fulfilled, and the Authority shall, without unreasonable delay, thereupon issue a certificate substantially in the form set forth in Schedule-Q (the **"Vesting Certificate"**), which will have the effect of constituting evidence of divestment by the Concessionaire of all of its rights, title and interest in the Project, and their vesting in the Authority pursuant hereto. It is expressly agreed that any defect or deficiency in the Divestment Requirements shall not in any manner be construed or interpreted as restricting the exercise of any rights by the Authority or its nominee on, or in respect of, the Project on the footing that all Divestment Requirements have been complied with by the Concessionaire.

32.5 Divestment costs etc.

32.5.1 The Concessionaire shall bear and pay all costs incidental to divestment of all of the rights, title and interest of the Concessionaire in the Project Assets in favour of the Authority on Termination, save and except that all stamp duties payable on any deeds or Documents

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516179(Pradeep
Signature Not Verified
Digitally Signed,
Name: PROXKey (Class 3) WD05611496(WD PROXKey)
Date: 29-Aug-2014 20:06:49

executed by the Concessionaire in connection with such Divestment shall be borne by the Authority.

32.5.2 In the event of any Dispute relating to matters covered by and under this Article 32, the Dispute Resolution Procedure shall apply.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 33

DEFECTS LIABILITY AFTER TERMINATION

33.1 Liability for defects after Termination

The Concessionaire shall be responsible for all defects and deficiencies in the Project for a period of 120 (one hundred and twenty) days after Termination, and it shall have the obligation to repair or rectify, at its own cost, all defects and deficiencies observed by the Independent Engineer in the Project during the aforesaid period. In the event that the Concessionaire fails to repair or rectify such defect or deficiency within a period of 15 (fifteen) days from the date of notice issued by the Authority in this behalf, the Authority shall be entitled to get the same repaired or rectified at the Concessionaire's risk and cost so as to make the Project conform to the Maintenance Requirements. All costs incurred by the Authority hereunder shall be reimbursed by the Concessionaire to the Authority within 15 (fifteen) days of receipt of demand thereof, and in the event of default in reimbursing such costs, the Authority shall be entitled to recover the same from the funds retained in the Escrow Account under the provisions of Clause 33.2 or from the Performance Guarantee provided thereunder. For the avoidance of doubt, the provisions of this Article 33 shall not apply if Termination occurs prior to COD.

33.2 Retention in Escrow Account

33.2.1 Notwithstanding anything to the contrary contained in this Agreement, but subject to the provisions of Clause 33.2.3, a sum equal to 15% (fifteen per cent) of the Annuity Payment due and payable immediately preceding the Transfer Date shall be retained in the Escrow Account for a period of 120 (one hundred and twenty) days after Termination for meeting the liabilities, if any, arising out of or in connection with the provisions of Clause 33.1.

33.2.2 Without prejudice to the provisions of Clause 33.2.1, the Independent Engineer shall carry out an inspection of the Project at any time between 210 (two hundred and ten) and 180 (one hundred and eighty) days prior to the Termination and if it recommends that the status of the Project is such that a sum larger than the amount stipulated in Clause 33.2.1 should be retained in the Escrow Account and for a period longer than the aforesaid 120 (one hundred and twenty) days, the amount recommended by the Independent Engineer shall be retained in the Escrow Account for the period specified by it.

33.2.3 The Concessionaire may, for the performance of its obligations under this Article 33, provide to the Authority a guarantee in the form of an Insurance Surety Bond (issued by Insurance Company authorized by Insurance Regulatory and Development Authority of India), Account Payee Demand Draft, Banker's Cheque or e-Bank Guarantee from a Bank for a sum equivalent to the amount determined under Clause 33.2.1 or 33.2.2, as the case may be, and for the period specified therein, substantially in the form set forth in Schedule-F (the **"Performance Guarantee"**), to be modified, mutatis mutandis, for this purpose, and the Authority shall, without prejudice to its other rights and remedies hereunder or in law, be entitled to encash and appropriate the required amounts from the Performance Guarantee for undertaking the repairs or rectification at the Concessionaire's risk and cost in accordance with the provisions of this Article 33. Upon furnishing of a Performance Guarantee under this Clause 33.2.3, the retention of funds in the Escrow Account in terms of Clause 33.2.1 or 33.2.2, as the case may be, shall be dispensed with.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name:APPROXKey Matrix WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Part VI

Other Provisions

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 34

ASSIGNMENT AND CHARGES

34.1 Restrictions on assignment and charges

34.1.1 Subject to Clauses 34.2 and 34.3, this Agreement shall not be assigned by the Concessionaire to any person, save and except with the prior consent in writing of the Authority, which consent the Authority shall be entitled to decline without assigning any reason.

34.1.2 Subject to the provisions of Clause 34.2, the Concessionaire shall not create nor permit to subsist any Encumbrance, or otherwise transfer or dispose of all or any of its rights and benefits under this Agreement or any Project Agreement to which the Concessionaire is a party, except with prior consent in writing of the Authority, which consent the Authority shall be entitled to decline without assigning any reason.

34.2 Permitted assignment and charges

The restraints set forth in Clause 34.1 shall not apply to:

(a) liens arising by operation of law (or by an agreement evidencing the same) in the ordinary course of business of the Project;

(b) mortgages/pledges/hypothecation of goods/assets other than Project Assets and their related documents of title, arising or created in the ordinary course of business of the Project, and as security only for indebtedness to the Senior Lenders under the Financing Agreements and/or for working capital arrangements for the Project. For the avoidance of doubt, the Senior Lenders would be entitled to create a lien on the Escrow Account, subject to and without prejudice to the rights of the Authority under this Agreement;

(c) assignment of rights, interest and obligations of the Concessionaire to or in favor of the Lenders' Representative as nominee and for the benefit of the Senior Lenders, to the extent covered by and in accordance with the Substitution Agreement as security for financing provided by Senior Lenders under the Financing Agreements; and

(d) Liens or encumbrances required by any Applicable Law.

34.3 Substitution Agreement

34.3.1 The Lenders' Representative, on behalf of Senior Lenders, may exercise the right to substitute the Concessionaire pursuant to the agreement for substitution of the Concessionaire (the **"Substitution Agreement"**) to be entered into amongst the Concessionaire, the Authority and the Lenders' Representative, on behalf of Senior Lenders, substantially in the form set forth in Schedule-R.

34.3.2 Upon substitution of the Concessionaire under and in accordance with the Substitution Agreement, the Nominated Company substituting the Concessionaire shall be deemed to be the Concessionaire under this Agreement and shall enjoy all rights and be liable for all obligations of the Concessionaire under this Agreement as if it were the Concessionaire; provided that where the Concessionaire is in breach of this Agreement on the date of such substitution, the Authority shall by notice grant a Cure Period of 120 (one hundred and twenty) days to the Concessionaire for curing such breach.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey (2.30-WD05611496(WD PROXKey)
Date: 29 Aug 2024 20:06:49

34.4 Assignment by the Authority

Notwithstanding anything to the contrary contained in this Agreement, the Authority may, after giving 60 (sixty) days' notice to the Concessionaire, assign and/ or transfer any of its rights and benefits and/or obligations under this Agreement to an assignee who is, in the reasonable opinion of the Authority, capable of fulfilling all of the Authority's then outstanding obligations under this Agreement.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 35

CHANGE IN LAW

35.1 Increase in costs

If as a result of Change in Law, the Concessionaire suffers an increase in costs or reduction in net after-tax return or other financial burden, the aggregate financial effect of which exceeds the higher of Rs. 1.22 crore (Rupees one crore and twenty two lakh only) or 2% (two per cent) of the total Annuity Payments in any Accounting Year, the Concessionaire may so notify the Authority and propose amendments to this Agreement so as to place the Concessionaire in the same financial position as it would have enjoyed had there been no such Change in Law resulting in increased costs, reduction in return or other financial burden as aforesaid. Upon notice by the Concessionaire, the Parties shall meet, as soon as reasonably practicable as but no later than 30 (thirty) days from the date of notice and either agree on amendments to this Agreement or on any other mutually agreed arrangement:

Provided that if no agreement is reached within 90 (ninety) days of the aforesaid notice, the Concessionaire may by notice require the Authority to pay an amount that would place the Concessionaire in the same financial position that it would have enjoyed had there been no such Change in Law, and within 15 (fifteen) days of receipt of such notice, along with particulars thereof, the Authority shall pay the amount specified therein; provided that if the Authority shall dispute such claim of the Concessionaire, the same shall be settled in accordance with the Dispute Resolution Procedure. For the avoidance of doubt, it is agreed that this Clause 35.1 shall be restricted to changes in law directly affecting the Concessionaire's costs of performing its obligations under this Agreement.

35.2 Reduction in costs

If as a result of Change in Law, the Concessionaire benefits from a reduction in costs or increase in net after-tax return or other financial gains, the aggregate financial effect of which exceeds the higher of Rs. 1.22 crore (Rupees one crore and twenty two lakh only) or 2% (two per cent) of the total Annuity Payments in any Accounting Year, the Authority may so notify the Concessionaire and propose amendments to this Agreement so as to place the Concessionaire in the same financial position as it would have enjoyed had there been no such Change in Law resulting in decreased costs, increase in return or other financial gains as aforesaid. Upon notice by the Authority, the Parties shall meet, as soon as reasonably practicable as but no later than 30 (thirty) days from the date of notice and either agree on such amendments to this Agreement or on any other mutually agreed arrangement:

Provided that if no agreement is reached within 90 (ninety) days of the aforesaid notice, the Authority may by notice require the Concessionaire to pay an amount that would place the Concessionaire in the same financial position that it would have enjoyed had there been no such Change in Law, and within 15 (fifteen) days of receipt of such notice, along with particulars thereof, the Concessionaire shall pay the amount specified therein to the Authority; provided that if the Concessionaire shall dispute such claim of the Authority, the same shall be settled in accordance with the Dispute Resolution Procedure. For the avoidance of doubt, it is agreed that this Clause 35.2 shall be restricted to changes in law directly affecting the Concessionaire's costs of performing its obligations under this Agreement.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS230713051619(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey (v 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

35.3 Protection of NPV

Pursuant to the provisions of Clauses 35.1 and 35.2 and for the purposes of placing the Concessionaire in the same financial position as it would have enjoyed had there been no Change in Law affecting the costs, returns or other financial burden or gains, the Parties shall rely on the Financial Model to establish a net present value (the **"NPV"**) of the net cash flow and make necessary adjustments in costs, revenues, compensation or other relevant parameters, as the case may be, to procure that the NPV of the net cash flow is the same as it would have been if no Change in Law had occurred. For the avoidance of doubt, the Parties expressly agree that for determination of NPV, the discount rate to be used shall be equal to the weighted average rate of interest at which the Concessionaire has raised the Debt Due under its Financing Agreements.

35.4 Restriction on cash compensation

The Parties acknowledge and agree that the demand for cash compensation under this Article 35 shall be restricted to the effect of Change in Law during the respective Accounting Year and shall be made at any time after commencement of such year, but no later than one year from the close of such Accounting Year. Any demand for cash compensation payable for and in respect of any subsequent Accounting Year shall be made after the commencement of the Accounting Year to which the demand pertains, but no later than 2 (two) years from the close of such Accounting Year.

35.5 Deleted

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 36

LIABILITY AND INDEMNITY

36.1 General indemnity

36.1.1 The Concessionaire shall indemnify, defend, save and hold harmless the Authority and its officers, servants, agents, Government Instrumentalities and Government owned and/or controlled entities/enterprises, (the **"Authority Indemnified Persons"**) against any and all suits, proceedings, actions, demands and claims from third parties for any loss, damage, cost and expense of whatever kind and nature, whether arising out of any breach by the Concessionaire of any of its obligations under this Agreement or any related agreement or on account of any defect or deficiency in the provision of services by the Concessionaire to the Authority or to any User, or from any negligence of the Concessionaire under contract or tort or on any other ground whatsoever, except to the extent that any such suits, proceedings, actions, demands and claims have arisen due to any negligent act or omission, or breach or default of this Agreement on the part of the Authority Indemnified Persons.

36.1.2 The Authority shall indemnify, defend, save and hold harmless the Concessionaire against any and all suits, proceedings, actions, demands and claims from third parties for any loss, damage', cost and expense of whatever kind and nature arising out of (a) defect in title and/or the rights of the Authority in the land comprised in the Site, and/or (b) breach by the Authority of any of its obligations under this Agreement or any related agreement, which materially and adversely affect the performance by the Concessionaire of its obligations under this Agreement, save and except that where any such claim, suit, proceeding, action, and/or demand has arisen due to a negligent act or omission, or breach of any of its obligations under any provision of this Agreement or any related agreement, and/or breach of its statutory duty on the part of the Concessionaire, its subsidiaries, affiliates, contractors, servants or agents, the same shall be the liability of the Concessionaire.

36.2 Indemnity by the Concessionaire

36.2.1 Without limiting the generality of Clause 36.1, the Concessionaire shall fully indemnify, hold harmless and defend the Authority and the Authority Indemnified Persons from and against any and all loss and/or damages arising out of or with respect to:

(a) Failure of the Concessionaire to comply with Applicable Laws and Applicable Permits;

(b) Payment of taxes required to be made by the Concessionaire in respect of the income or other taxes of the Concessionaire's contractors, suppliers and representatives; or

(c) Non-payment of amounts due as a result of materials or services furnished to the Concessionaire or any of its contractors which are payable by the Concessionaire or any of its contractors.

36.2.2 Without limiting the generality of the provisions of this Article 36, the Concessionaire shall fully indemnify, hold harmless and defend the Authority Indemnified Persons from and against any and all suits, proceedings, actions, claims, demands, liabilities and damages which the Authority Indemnified Persons may hereafter suffer, or pay by reason of any demands, claims, suits or proceedings arising out of claims of infringement of any domestic or foreign patent rights, copyrights or other intellectual property, proprietary or

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: e-Proc Key Manager WD05611496(WD_PROXKey)
Date: 29-Aug-2024 20:06:49

confidentiality rights with respect to any materials, information, design or process used by the Concessionaire or by the Concessionaire's Contractors in performing the Concessionaire's obligations or in any way incorporated in or related to the Project. If in any such suit, action, claim or proceedings, a temporary restraint order or preliminary injunction is granted, the Concessionaire shall make every reasonable effort, by giving a satisfactory bond or otherwise, to secure the revocation or suspension of the injunction or restraint order. If, in any such suit, action, claim or proceedings, the Project, or any part thereof or comprised therein, is held to constitute an infringement and its use is permanently enjoined, the Concessionaire shall promptly make every reasonable effort to secure for the Authority a license, at no cost to the Authority, authorizing continued use of the infringing work. If the Concessionaire is unable to secure such license within a reasonable time, the Concessionaire shall, at its own expense, and without impairing the Specifications and Standards, either replace the affected work, or part, or process thereof with non-infringing work or part or process, or modify the same so that it becomes non-infringing.

36.3 Notice and contest of claims

In the event that either Party receives a claim or demand from a third party in respect of which it is entitled to the benefit of an indemnity under this Article 36 (the **"Indemnified Party"**) it shall notify the other Party (the **"Indemnifying Party"**) within 15 (fifteen) days of receipt of the claim or demand and shall not settle or pay the claim without the prior approval of the Indemnifying Party, which approval shall not be unreasonably withheld or delayed. In the event that the Indemnifying Party wishes to contest or dispute the claim or demand, it may conduct the proceedings in the name of the Indemnified Party, subject to the Indemnified Party being secured against any costs involved, to its reasonable satisfaction.

36.4 Defense of claims

36.4.1 The Indemnified Party shall have the right, but not the obligation, to contest, defend and litigate any claim, action, suit or proceeding by any third party alleged or asserted against such Party in respect of, resulting from, related to or arising out of any matter for which it is entitled to be indemnified hereunder, and reasonable costs and expenses thereof shall be indemnified by the Indemnifying Party. If the Indemnifying Party acknowledges in writing its obligation to indemnify the Indemnified Party in respect of loss to the full extent provided by this Article 36, the Indemnifying Party shall be entitled, at its option, to assume and control the defense of such claim, action, suit or proceeding, liabilities, payments and obligations at its expense and through the counsel of its choice; provided it gives prompt notice of its intention to do so to the Indemnified Party and reimburses the Indemnified Party for the reasonable cost and expenses incurred by the Indemnified Party prior to the assumption by the Indemnifying Party of such defense. The Indemnifying Party shall not be entitled to settle or compromise any claim, demand, action, suit or proceeding without the prior written consent of the Indemnified Party, unless the Indemnifying Party provides such security to the Indemnified Party as shall be reasonably required by the Indemnified Party to secure the loss to be indemnified hereunder to the extent so compromised or settled.

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep

36.4.2 If the Indemnifying Party has exercised its rights under Clause 36.3, the Indemnified Party shall not be entitled to settle or compromise any claim, action, suit or proceeding without the prior written consent of the Indemnifying Party (which consent shall not be unreasonably withheld or delayed).

Signature Not Verified
Digitally Signed
Name: PROXKey V 3.0-WD0561149(WIN PROXKey)
Date: 29-Aug-2024 20:06:49

36.4.3 If the Indemnifying Party exercises its rights under Clause 36.3, the Indemnified Party shall nevertheless have the right to employ its own counsel, and such counsel may participate in such action, but the fees and expenses of such counsel shall be at the expense of the Indemnified Party, when and as incurred, unless:

(a) The employment of counsel by such party has been authorized in writing by the Indemnifying Party;

(b) The Indemnified Party shall have reasonably concluded that there may be a conflict of interest between the Indemnifying Party and the Indemnified Party in the conduct of the defense of such action;

(c) the Indemnifying Party shall not, in fact, have employed independent counsel reasonably satisfactory to the Indemnified Party, to assume the defense of such action and shall have been so notified by the Indemnified Party; or

(d) The Indemnified Party shall have reasonably concluded and specifically notified the Indemnifying Party either:

(I) that there may be specific defenses available to it which are different from or additional to those available to the Indemnifying Party; or

(ii) That such claim, action, suit or proceeding involves or could have a material adverse effect upon it beyond the scope of this Agreement:

Provided that if Sub-clauses (b), (c) or (d) of this Clause 36.4.3 shall be applicable, the counsel for the Indemnified Party shall have the right to direct the defense of such claim, demand, action, suit or proceeding on behalf of the Indemnified Party, and the reasonable fees and disbursements of such counsel shall constitute legal or other expenses hereunder.

36.5 No consequential claims

Notwithstanding anything to the contrary contained in this Article 36, the indemnities herein provided shall not include any claim or recovery in respect of any cost, expense, loss or damage of an indirect, incidental or consequential nature, including loss of profit, except as expressly provided in this Agreement.

36.6 Survival on Termination

The provisions of this Article 36 shall survive Termination.

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619(Pradeep

Signature Not Verified
Digitally Signed,
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 37

RIGHTS AND TITLE OVER THE SITE

37.1 Licensee rights

For the purpose of this Agreement, the Concessionaire shall have rights to the use of the Site as a licensee subject to and in accordance with this Agreement, and to this end; it may regulate the entry and use of the Project by third parties in accordance with and subject to the provisions of this Agreement.

37.2 Access rights of the Authority and others

37.2.1 The Concessionaire shall allow free access to the Site at all times for the authorized representatives and vehicles of the Authority and/or its contractors, Senior Lenders, and the Independent Engineer, and for the persons and vehicles duly authorized by any Government Instrumentality to inspect the Project and to investigate any matter within their authority, and upon reasonable notice, the Concessionaire shall provide to such persons reasonable assistance necessary to carry out their respective duties and functions.

37.2.2 The Concessionaire shall, for the purpose of operation and maintenance of any utility or road specified in Article 11, allow free access to the Site at all times for the authorized persons and vehicles of the controlling body of such utility or road.

37.3 Property taxes

All property taxes on the Site shall be payable by the Authority as owner of the Site; provided, however, that any such taxes payable by the Concessionaire under Applicable Laws for use of the Site shall not be reimbursed or payable by the Authority. For the avoidance of doubt, the Parties agree that stamp duties, if any, due and payable on the grant of license comprising this Agreement shall be paid by the Authority. Provided, however, that the Authority may require the Concessionaire to pay such stamp duties, which shall be reimbursed by the Authority to the Concessionaire within 15 (fifteen) days of receiving the demand thereof.

37.4 Restriction on sub-letting

The Concessionaire shall not sub-license or sub-let the whole or any part of the Site, save and except as may be expressly set forth in this Agreement; provided that nothing contained herein shall be construed or interpreted as restricting the right of the Concessionaire to appoint Contractors for the performance of its obligations hereunder including for operation and maintenance of all or any part of the Project.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 38

DISPUTE RESOLUTION

38.1 Dispute Resolution

38.1.1. In the event of any dispute, difference or controversy of whatever nature howsoever arising under or out of or in relation to this Agreement (including its interpretation) between the Parties, and so notified in writing by either Party to the other Party (the "Dispute") either Party may call upon the Independent Engineer, to mediate and assist the Parties in arriving at an amicable settlement thereof.

38.1.2 The Parties agree to use their best efforts for resolving all Disputes arising under or in respect of this Agreement promptly, equitably and in good faith, and further agree to provide each other with reasonable access during normal business hours to all non-privileged records, information and data pertaining to any Dispute.

38.1.3 Dispute Resolution Board (DRB):

Failing mediation by the Independent Engineer or without the intervention of the Independent Engineer, either Party may require such Dispute to be referred to the Dispute Resolution Board ("DRB") in accordance with the procedure setforth in Schedule-S to the Concession Agreement. The decision(s) of the Dispute Resolution Board shall be binding on both parties who shall promptly give effect to unless and until the same is revised/modified, as hereinafter provided, in a Conciliation/Arbitral Tribunal.

38.2 Conciliation

If either the Authority or the Concessionaire is dissatisfied with any decision of the DRB, and/ or if the DRB is unable to resolve the dispute, either Party may refer the Dispute to arbitration in accordance with the provisions of Clause 38.3 but before resorting to such arbitration, the parties agree to explore conciliation by the Conciliation Committees of Independent Experts set up by the Authority in accordance with the procedure decided by the panel of such experts and notified by the Authority on its website including its subsequent amendments. In the event of the conciliation proceedings being successful, the parties to the dispute would sign the written settlement agreement and the conciliators would authenticate the same. Such settlement agreement would then be binding on the parties in terms of Section 73 of the Arbitration Act. In case of failure of the conciliation process even at the level of the Conciliation Committee, either party may refer the Dispute to arbitration in accordance with the provisions of Clause 38.3.

38.3 Arbitration

38.3.1 Any Dispute which is not resolved amicably by conciliation as provided in Clause 38.2 shall be finally settled by arbitration as set forth below:

i) The Dispute shall be finally referred to Society for Affordable Resolution of Disputes (hereinafter called as SAROD), a Society registered under Society's Act, 1860 vide Registration no. S/RS/SW1049/2013 duly represented by Authority and National Highways Builders Federation (NHBF). The dispute shall be dealt with in accordance with the Rules of SAROD. The detailed procedure for conducting Arbitration shall be governed by the Rules of SAROD and provisions of Arbitration & Conciliation Act,

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-Ad5a11c06(Wb...PROXKey)
Date: 29-Aug-2024 20:06:49

1996, as amended from time to time. The Dispute shall be governed by Substantive Law of India.

ii) The appointment of Tribunal, Code of conduct for Arbitrators and fees and expenses of SAROD and Arbitral Tribunal shall also be governed by the Rules of SAROD as amended from time to time.

iii) Subject to the provisions of THE LIMITATION ACT, 1963, as amended from time to time, Arbitration may be commenced during or after the Concession Period, provided that the obligations of Authority and the Concessionaire shall not be altered by reason of the Arbitration being conducted during the Concession Period.

iv) The venue of Arbitration shall be New Delhi or a place selected by governing body of SAROD and the language for all documents and communications between the parties shall be English.

v) The expenses incurred by each party in connection with the preparation, presentation, etc., of arbitral proceedings shall be shared by each party itself.

38.3.2 The arbitrators shall make a reasoned award (the "Award"). Any Award made in any arbitration held pursuant to this Article 38 shall be final and binding on the Parties as from the date it is made, and the Concessionaire and the Authority agree and undertake to carry out such Award without delay.

38.3.3 The Concessionaire and the Authority agree that an Award may be enforced against the Concessionaire and/or the Authority, as the case may be, and their respective assets wherever situated.

38.3.4 This Agreement and the rights and obligations of the Parties shall remain in full force and effect, pending the Award in any arbitration proceedings hereunder. Further, the parties unconditionally acknowledge and agree that notwithstanding any dispute between them, each party shall proceed with the performance of its respective obligations, pending resolution of Dispute in accordance with this Article.

38.4 Adjudication by Regulatory Authority, Tribunal or Commission

In the event of constitution of a statutory regulatory authority, tribunal or commission, as the case may be, with powers to adjudicate upon disputes between the Concessionaire and the Authority, all Disputes arising after such constitution shall, instead of reference to arbitration under Clause 38.3, be adjudicated upon by such regulatory authority, tribunal or commission in accordance with the Applicable Law and all references to Dispute Resolution Procedure shall be construed accordingly. For the avoidance of doubt, the Parties hereto agree that the adjudication hereunder shall not be final and binding until an appeal against such adjudication has been decided by an appellate tribunal or court of competent jurisdiction, as the case may be, or no such appeal has been preferred within the time specified in the Applicable Law.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 39

DISCLOSURE

39.1 Disclosure of Specified Documents

The Concessionaire shall make available for inspection by any person, copies of this Concession Agreement, the Maintenance Manual, the Maintenance Program, the Maintenance Requirements and the Safety Requirements (hereinafter collectively referred to as the **"Specified Documents"**), free of charge, during normal business hours on all working days at the Site and the Concessionaire's Registered Office. The Concessionaire shall prominently display at the Site, public notices stating the availability of the Specified Documents for such inspection, and shall provide copies of the same to any person upon payment of copying charges on a 'no profit no loss' basis.

39.2 Disclosure of Documents relating to safety

The Concessionaire shall make available for inspection by any person copies of all Documents and data relating to safety of the Project, free of charge, during normal business hours on all working days, at the Concessionaire's Registered Office. The Concessionaire shall make copies of the same available to any person upon payment of copying charges on a 'no profit no loss' basis.

39.3 Notwithstanding the provisions of Clauses 39.1 and 39.2, the Authority shall be entitled to direct the Concessionaire, from time to time, to withhold the disclosure of Protected Documents (as defined herein below) to any person in pursuance of the aforesaid Clauses.

Explanation:

The expression Protected Documents shall mean such of the Specified Documents or documents referred to in Clauses 39.1 and 39.2, or portions thereof, the disclosure of which the Authority is entitled to withhold under the provisions of the Right to Information Act, 2005.

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619(Pradeep

Signature Not Verified
Digitally Signed,
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 40

REDRESSAL OF PUBLIC GRIEVANCES

40.1 Complaints Register

40.1.1 The Concessionaire shall maintain a public relations office at the Site where it shall keep a register (the **"Complaint Register"**) open to public access at all times for recording of complaints by any person (the **"Complainant"**). Information relating to the availability of and access to the Complaint Register shall be prominently displayed by the Concessionaire at each the Site so as to bring it to the attention of all Users.

40.1.2 The Complaint Register shall be securely bound and each page thereof shall be duly numbered. It shall have appropriate columns including the complaint number, date, name and address of the Complainant, substance of the complaint and the action taken by the Concessionaire. Immediately after a complaint is registered, the Concessionaire shall give a receipt to the Complainant stating the date and complaint number.

40.1.3 Without prejudice to the provisions of Clauses 40.1.1 and 40.1.2, the Authority may, in consultation with the Concessionaire, specify the procedure for making complaints in electronic form and for responses thereto.

40.2 Redressal of complaints

40.2.1 The Concessionaire shall inspect the Complaint Register every day and take prompt and reasonable action for redressed of each complaint. The action taken shall be briefly noted in the Complaint Register and a reply stating the particulars thereof shall be sent by the Concessionaire to the Complainant under a certificate of posting.

40.2.2 Within 7 (seven) days of the close of each month, the Concessionaire shall send to the Authority and to the Independent Engineer a true photocopy each of all the pages of the Complaint Register on which any entry has been recorded during the course of such month, and upon perusal thereof, the Authority may, in its discretion, advise the Concessionaire to take such further action as the Authority may deem appropriate for a fair and just redressal of any grievance. The Concessionaire shall consider such advice and inform the Authority of its decision thereon, and if the Authority is of the opinion that the Complainant is entitled to further relief, the Authority may advise the Complainant to seek appropriate remedy under the Consumer Protection Act, 1986, at his own risk and cost.

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516179(Pradeep

Signature Not Verified
Digitally Signed,
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 41

MISCELLANEOUS

41.1 Governing law and jurisdiction

This Agreement shall be construed and interpreted in accordance with and governed by the laws of India, and the courts in New Delhi shall have exclusive jurisdiction over matters arising out of or relating to this Agreement.

41.2 Waiver of immunity

Each Party unconditionally and irrevocably:

(a) Agrees that the execution, delivery and performance by it of this Agreement constitute commercial acts done and performed for commercial purpose;

(b) agrees that, should any proceedings be brought against it or its assets, property or revenues in any jurisdiction in relation to this Agreement or any transaction contemplated by this Agreement, no immunity (whether by reason of sovereignty or otherwise) from such proceedings shall be claimed by or on behalf of the Party with respect to its assets;

(c) waives any right of immunity which it or its assets, property or revenues now has, may acquire in the future or which may be attributed to it in any jurisdiction; and

(d) consents generally in respect of the enforcement of any judgment or award against it in any such proceedings to the giving of any relief or the issue of any process in any jurisdiction in connection with such proceedings (including the making, enforcement or execution against it or in respect of any assets, property or revenues whatsoever irrespective of their use or intended use of any order or judgment that may be made or given in connection therewith).

41.3 Depreciation

For the purposes of depreciation under Applicable Laws, the property representing the capital investment made by the Concessionaire in the Project shall be deemed to be acquired and owned by the Concessionaire. For the avoidance of doubt, the Authority shall not in any manner be liable in respect of any claims for depreciation to be made by the Concessionaire under Applicable Laws.

41.4 Delayed payments

41.4.1 The Parties hereto agree that payments due from one Party to the other Party under the provisions of this Agreement shall be made within the period set forth therein, and if no such period is specified, within 30 (thirty) days of receiving a demand along with the necessary particulars. Unless otherwise specified in this Agreement, in the event of delay beyond such period, the defaulting Party shall pay interest for the period of delay calculated at a rate equal to 4% (four per cent) above the daily average Bank Rate, and recovery thereof shall be without prejudice to the rights of the Parties under this Agreement including Termination thereof.

41.4.2 Unless otherwise specified, any interest payable under this Agreement shall accrue on a daily outstanding basis and shall be compounded on the basis of quarterly rests.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS32307130516179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

41.5 Waiver

41.5.1 Waiver, including partial or conditional waiver, by either Party of any default by the other Party in the observance and performance of any provision of or obligations under this Agreement:

(a) Shall not operate or be construed as a waiver of any other or subsequent default hereof or of other provisions of or obligations under this Agreement;

(b) Shall not be effective unless it is in writing and executed by a duly authorized representative of the Party; and

(c) Shall not affect the validity or enforceability of this Agreement in any manner.

41.5.2 Neither the failure by either Party to insist on any occasion upon the performance of the terms, conditions and provisions of this Agreement or any obligation thereunder nor time or other indulgence granted by a Party to the other Party shall be treated or deemed as waiver of such breach or acceptance of any variation or the relinquishment of any such right hereunder.

41.6 Liability for review of Documents and Drawings

Except to the extent expressly provided in this Agreement

(a) no review, comment or approval by the Authority or the Independent Engineer of any Project Agreement, Document or Drawing submitted by the Concessionaire nor any observation or inspection of the construction, operation or maintenance of the Project nor the failure to review, approve, comment, observe or inspect hereunder shall relieve or absolve the Concessionaire from its obligations, duties and liabilities under this Agreement, Applicable Laws and Applicable Permits; and

(b) The Authority shall not be liable to the Concessionaire by reason of any review, comment, approval, observation or inspection referred to in Sub-clause (a) above.

41.7 Exclusion of implied warranties etc.

This Agreement expressly excludes any warranty, condition or other undertaking implied at law or by custom or otherwise arising out of any other agreement between the Parties or any representation by either Party not contained in a binding legal agreement executed by both Parties.

41.8 Survival

41.8.1 Termination shall:

(a) Not relieve the Concessionaire or the Authority, as the case may be, of any obligations hereunder which expressly or by implication survive Termination hereof; and

(b) except as otherwise provided in any provision of this Agreement expressly limiting the liability of either Party, not relieve either Party of any obligations or liabilities for loss or damage to the other Party arising out of, or caused by, acts or omissions of such Party prior to the effectiveness of such Termination or arising out of such Termination.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed by ACTION ...
Name: PROXKey v 3.0-WD0561149(WIN PROXKey)
Date: 29-Aug-2024 20:06:49

41.8.2 All obligations surviving Termination shall only survive for a period of 3 (three) years following the date of such Termination.

41.9 Entire Agreement

This Agreement and the Schedules together constitute a complete and exclusive statement of the terms of the agreement between the Parties on the subject hereof, and no amendment or modification hereto shall be valid and effective unless such modification or amendment is agreed to in writing by the Parties and duly executed by persons especially empowered in this behalf by the respective Parties. All prior written or oral understandings, offers or other communications of every kind pertaining to this Agreement are abrogated and withdrawn. For the avoidance of doubt, the Parties hereto agree that any obligations of the Concessionaire arising from the Request for Proposals, as the case may be, shall be deemed to form part of this Agreement and treated as such.

41.10 Severability

If for any reason whatsoever, any provision of this Agreement is or becomes invalid, illegal or unenforceable or is declared by any court of competent jurisdiction or any other instrumentality to be invalid, illegal or unenforceable, the validity, legality or enforceability of the remaining provisions shall not be affected in any manner, and the Parties will negotiate in good faith with a view to agreeing to one or more provisions which may be substituted for such invalid, unenforceable or illegal provisions, as nearly as is practicable to such invalid, illegal or unenforceable provision. Failure to agree upon any such provisions shall not be subject to the Dispute Resolution Procedure set forth under this Agreement or otherwise.

41.11 No partnership

This Agreement shall not be interpreted or construed to create an association, joint venture or partnership between the Parties, or to impose any partnership obligation or liability upon either Party, and neither Party shall have any right, power or authority to enter into any agreement or undertaking for, or act on behalf of, or to act as or be an agent or representative of, or to otherwise bind, the other Party.

41.12 Third parties

This Agreement is intended solely for the benefit of the Parties and their respective successors and permitted assigns, and nothing in this Agreement shall be construed to create any duty to, standard of care with reference to, or any liability to, any person not a Party to this Agreement including any Concessionaire's Contractor.

41.13 Successors and assigns

This Agreement shall be binding upon, and inure to the benefit of the Parties and their respective successors and permitted assigns.

41.14 Notices

Unless the law requires to follow the specified mode of communication only as prescribed therein, any notice or other communication to be given by one contracting Party to the other Party under or in connection with the matters contemplated by this Agreement shall be routed through NHAI Data Lake under the hand of the authorized representative and shall:

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey v3.0-WD05611496(Wd_PROXKey)
Date: 29-Aug-2014 20:06:49

(a) in the case of the Concessionaire, be given through NHAI Data Lake and marked for attention of the person set out below or to such other person as the Concessionaire may from time to time designate by notice to the Authority.

Mr. Chela Ram Mundan

Designation: Director

Address: MCC, Opp Nasrani Petrol Pump, Village Pal, Jodhpur, Rajasthan -342001

Tel No: +91-9414195366

Email : mundancr@gmail.com

(b) in the case of the Authority, be given through NHAI Data Lake and be addressed to the person named below with a copy delivered to the Authority Representative or such other person as the Authority may from time to time designate by notice to the Concessionaire;

Mr. Pradeep Kumar Lal

Designation: General Manager (Technical)

Address: National Highways Authority of India, G-5 & 6, Sector-10, Dwarka, New Delhi-110075

Tel No: 91-011-25074100/200 (Extn. 1202)

Email : pradeeplal@nhai.org

(c) any notice or communication by one contracting Party to the other Party, given in accordance herewith, shall be deemed to have been delivered when given through or made on the NHAI Data Lake.

41.15 Language

All notices required to be given by one Party to the other Party and all other communications, Documentation and proceedings which are in any way relevant to this Agreement shall be in writing and in English language.

41.16 Counterparts

This Agreement may be executed in two counterparts, each of which, when executed and delivered, shall constitute an original of this Agreement.

41.17 State Support Agreement

The Concessionaire acknowledges that it has received from the Authority a certified true copy of the agreement executed between MORTH and the State Government for providing the support and services specified therein (the "**State Support Agreement**"), and the Parties hereto agree to make their best endeavors to procure the support of the State Government.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ARTICLE 42

DEFINITIONS

42.1 Definitions

In this Agreement, the following words and expressions shall, unless repugnant to the context or meaning thereof, have the meaning hereinafter respectively assigned to them:

"**Accounting Year**" means the financial year commencing from the first day of April of any calendar year and ending on the thirty-first day of March of the next calendar year;

"Additional Performance Security" shall have the meaning as set forth in Clause 9.7;

"**Adjusted Equity**" means the Equity funded in Indian Rupees and adjusted on the first day of the current month (the **"Reference Date"**), in the manner set forth below, to reflect the change in its value on account of depreciation and variations in WPI, and for any Reference Date occurring:

(a) on or before COD, the Adjusted Equity shall be a sum equal to the Equity funded in Indian Rupees and expended on the Project, revised to the extent of one half of the variation in WPI occurring between the first day of the month of Appointed Date and the Reference Date;

"Affected Party" shall have the meaning as set forth in Clause 28.1;

"Agreement" or "Concession Agreement" means this Agreement, its Recitals, and the Schedules hereto and any amendments thereto made in accordance with the provisions contained in this Agreement;

"Annuity Payments" shall have the meaning as set forth in Clause 23.6.2;

"Annuity Payment Date" shall have the meaning as set forth in Clause 23.6.2;

"Appendix" shall have the meaning as set forth in Clause 10.3.1;

"Applicable Laws" means all laws, brought into force and effect by GOI or the State Government including rules, regulations and notifications made thereunder, and judgments, decrees, injunctions, writs and orders of any court of record, applicable to this Agreement and the exercise, performance and discharge of the respective rights and obligations of the Parties hereunder, as may be in force and effect during the subsistence of this Agreement;

"Applicable Permits" means all clearances, licenses, permits, authorizations, no objection certificates, consents, approvals and exemptions required to be obtained or maintained under Applicable Laws in connection with the construction, operation and maintenance of the Project during the subsistence of this Agreement;

"Appointed Date" means the date on which Financial Close is achieved and every Condition Precedent is satisfied, in accordance with the provisions of this Agreement, and such date shall be the date of commencement of the Concession Period;

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey (v 3.0-WD05011496(WD PROXKey)
Date: 29 Aug 2024 20:06:49

"Associate" or "Affiliate" means, in relation to either Party {or Consortium Members}, a person who controls, is controlled by, or is under the common control with such Party {or Consortium Member} (as used in this definition, the expression "control" means, with respect to a person which is a company or corporation, the ownership, directly or indirectly, of more than 50% (fifty per cent) of the voting shares of such person, and

with respect to a person which is not a company or corporation, the power to direct the management and Policies of such person, whether by operation of law or by contract or otherwise);

"Authority" shall have the meaning attributed thereto in the array of Parties as set forth in the Recitals;

"Authority Default" shall have the meaning as set forth in Clause 31.2.1;

"**Authority Indemnified Persons**" shall have the meaning set forth in Clause 36.1.1;

"Authority Representative" means such person or persons as may be authorized in writing by the Authority to act on its behalf under this Agreement and shall include any person or persons having authority to exercise any rights or perform and fulfill any obligations of the Authority under this Agreement;

"Bank" means a bank incorporated in India and having a minimum net worth of Rs. 1,000 crore (Rupees one thousand crore) or any other bank acceptable to Senior Lenders, but does not include a bank in which any Senior Lender has an interest;

"Bank Rate" means the rate of interest specified by the Reserve Bank of India from time to time in pursuance of section 49 of the Reserve Bank of India Act, 1934 or any replacement of such Bank Rate for the time being in effect;

"Bid" means the documents in their entirety comprised in the bid submitted by the {selected bidder/Consortium} in response to the Request for Proposals in accordance with the provisions thereof and **"Bids"** shall mean the bids submitted by any and all pre-qualified bidders;

"Bid Date" means the last date on which the Bid may have been submitted in accordance with the provisions of the Request for Proposals;

"Bid Project Cost" shall have the meaning as set forth in Clause 23.1;

"Bid Security" means the security provided by the Concessionaire to the Authority along with the Bid, in accordance with the Request for Proposals, and which is to remain in force until substituted by the Performance Security;

"COD" or "Commercial Operation Date" shall have the meaning as set forth in Clause 15.1.1;

"CPI (IW)" means the Consumer Price Index for Industrial Workers as published by the Labour Bureau, Government of India and shall include any index which substitutes the CPI (IW), and any reference to CPI (IW) shall, unless the context otherwise requires, be construed as a reference to the CPI (IW) published for the period ending with the preceding quarter;

"Change in Law" means the occurrence of any of the following after the Bid Date:

(a) The enactment of any new Indian law;

(b) The repeal, modification or re-enactment of any existing Indian law;

(c) The commencement of any Indian law which has not entered into effect until the Bid Date;

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD0561146(Min PROXKey)
Date: 29-Aug-2024 20:06:49

(d) a change in the interpretation or application of any Indian law by a judgment of a court of record which has become final, conclusive and binding, as compared to such interpretation or application by a court of record prior to the Bid Date; or

(e) Any change in the rates of any of the Taxes that have a direct effect on the Project;

"Change in Ownership" means a transfer of the direct and/or indirect legal or beneficial ownership of any shares, or securities convertible into shares, that causes the aggregate holding of the {selected bidder/ Consortium Members},together with {its/their} Associates, in the total Equity to decline below 51% (fifty one per cent) thereof during Construction Period and six months thereafter; provided that any material variation (as compared to the representations made by the Concessionaire during the bidding process for the purposes of meeting the minimum conditions of eligibility or for evaluation of its application or bid, as the case may be,) in the proportion of the equity holding of {the selected bidder/ any Consortium Member} to the total Equity, if it occurs prior to completion of a period of six months after COD, shall constitute Change in Ownership;

"Change of Scope" shall have the meaning as set forth in Clause 16.1.1;

"Company" means the company acting as the Concessionaire under this Agreement;

"Completion Certificate" shall have the meaning as set forth in Clause 14.2;

"Completion Cost" shall have the meaning as set forth in Clause 23.6.1

"Concession" shall have the meaning as set forth in Clause 3.1.1;

"Concessionaire" shall have the meaning attributed thereto in the array of Parties as set forth in the Recitals;

"Concession Period" means the period starting on and from Appointed Date and ending on the Transfer Date. For avoidance of doubt it is clarified that the Concession Period shall include the Construction Period plus a fixed period of 15 years of Operation & Maintenance Period from the COD;

"Concessionaire Default" shall have the meaning as set forth in Clause 31.1.1;

"Conditions Precedent" shall have the meaning as set forth in Clause 4.1.1;

{"Consortium" shall have the meaning as set forth in Recital (D) ;}

{"Consortium Member" means a company specified in Recital (D) as a member of the Consortium ;}

"Construction Period" means the period beginning from the Appointed Date and ending on COD;

"Construction Works" means all works and things necessary to complete the Project in accordance with this Agreement;

"Contractor" means the person or persons, as the case may be, with whom the Concessionaire has entered into any of the EPC Contract, the O&M Contract or other material agreement or contract for construction, operation and/or maintenance of the Project or matters incidental thereto, but does not include a person who has entered into an agreement for providing financial assistance to the Concessionaire;

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey v3.0-WP056114064(MD PROXKey)
Date: 29-Aug-2014 20:06:49

"Cure Period" means the period specified in this Agreement for curing any breach or default of any provision of this Agreement by the Party responsible for such breach or default and shall:

(a) Commence from the date on which a notice is delivered by one Party to the other Party asking the latter to cure the breach or default specified in such notice;

(b) Not relieve any Party from liability to pay Damages or compensation under the provisions of this Agreement; and

(c) Not in any way be extended by any period of Suspension under this Agreement;

provided that if the cure of any breach by the Concessionaire requires any reasonable action by the Concessionaire that must be approved by the Authority or the Independent Engineer hereunder, the applicable Cure Period shall be extended by the period taken by the Authority or the Independent Engineer to accord their approval;

"DBOT" or "Design, Build, Operate and Transfer" shall have the meaning as set forth in Recital (A);

"Damages" shall have the meaning as set forth in Sub-clause (w) of Clause 1.2.1;

"Debt Due" means the aggregate of the following sums expressed in Indian Rupees outstanding on the Transfer Date:

(a) the principal amount of the debt provided by the Senior Lenders under the Financing Agreements for financing the Total Project Cost (the "principal") but excluding any part of the principal that had fallen due for repayment two years prior to the Transfer Date;

(b) all accrued interest, financing fees and charges payable under the Financing Agreements on, or in respect of, the debt referred to in Sub-clause (a) above until the Transfer Date but excluding (i) any interest, fees or charges that had fallen due one year prior to the Transfer Date, (ii) any penal interest or charges payable under the Financing Agreements to any Senior Lender, and (iii) any pre-payment charges in relation to accelerated repayment of debt except where such charges have arisen due to Authority Default; and

(c) any Subordinated Debt which is included in the Financial Package and disbursed by lenders for financing the Total Project Cost;

provided that if all or any part of the Debt Due is convertible into Equity at the option of Senior Lenders and/or the Concessionaire, it shall for the purposes of this Agreement be deemed to be Debt Due even after such conversion and the principal thereof shall be dealt with as if such conversion had not been undertaken;

"Debt Service" means the sum of all payments on account of principal, interest, financing fees and charges due and payable in an Accounting Year to the Senior Lenders for and in respect of Debt Due under the Financing Agreements;

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

"Development Period" means the period from the date of this Agreement until the Appointed Date;

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

"Dispute" shall have the meaning as set forth in Clause 38.1.1;

"Dispute Resolution Procedure" means the procedure for resolution of Disputes as set forth in Article 38;

"Divestment Requirements" means the obligations of the Concessionaire for and in respect of Termination as set forth in Clause 32.1;

"Document" or "Documentation" means documentation in printed or written form, or in tapes, discs, drawings, computer programmers, writings, reports, photographs, films, cassettes, or expressed in any other written, electronic, audio or visual form;

"Drawings" means all of the drawings, calculations and documents pertaining to the Project as set forth in Schedule-H, and shall include 'as built' drawings of the Project;

"EPC Contract" means the engineering, procurement and construction contract or contracts entered into by the Concessionaire with one or more Contractors for, inter alia, engineering and construction of the Project in accordance with the provisions of this Agreement;

"EPC Contractor" means the person with whom the Concessionaire has entered into an EPC Contract;

"Emergency" means a condition or situation that is likely to endanger the security of the individuals on or about the Project, including Users thereof, or which poses an immediate threat of material damage to any of the Project Assets;

"Encumbrances" means, in relation to the Project, any encumbrances such as mortgage, charge, pledge, lien, hypothecation, security interest, assignment, privilege or priority of any kind having the effect of security or other such obligations, and shall include any designation of loss payees or beneficiaries or any similar arrangement under any insurance policy pertaining to the Project, where applicable herein but excluding utilities referred to in Clause 11.1;

"Equity" means the sum expressed in Indian Rupees representing the paid up equity share capital of the Concessionaire for meeting the equity component of the Total Project Cost, and for the purposes of this Agreement shall include convertible instruments or other similar forms of capital, which shall compulsorily convert into equity share capital of the Company, and any interest-free funds advanced by any shareholder of the Company for meeting such equity component;

"Escrow Account" means an Account which the Concessionaire shall open and maintain with a Bank in which all inflows and outflows of cash on account of capital and revenue receipts and expenditures shall be credited and debited, as the case may be, in accordance with the provisions of this Agreement, and includes the Sub-Accounts of such Escrow Account;

"Escrow Agreement" shall have the meaning as set forth in Clause 25.1.2;

"Escrow Bank" shall have the meaning as set forth in Clause 25.1.1;

"Escrow Default" shall have the meaning as set forth in Schedule-O;

"Estimated Project Cost" shall be the cost estimated by the Authority for the Project and provided in the Request for Proposal Volume –I – Instructions to Bidders;

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619(Pradeep
Signature Not Verified
Digitally Signed,
Name: PROXKey (e-Mudhra CA 2014) for DSC certificate of WD05611496(WD PROXKey)
Date: 29-Aug-2014 20:06:49

"**Financial Close**" means the fulfillment of all conditions precedent to the initial availability of funds under the Financing Agreements which shall be communicated by the Lender's Representative to the Authority in writing. Such communication from Lender's Representative shall be treated as date on which the Financial Close is achieved;

"Financial Default" shall have the meaning as set forth in Schedule-R;

"Financial Model" means the financial model adopted by Senior Lenders, setting forth the capital and operating costs of the Project and revenues therefrom on the basis of which financial viability of the Project has been determined by the Senior Lenders, and includes a description of the assumptions and parameters used for making calculations and projections therein;

"Financial Package" means the financing package indicating the total capital cost of the Project and the means of financing thereof, as set forth in the Financial Model and approved by the Senior Lenders, and includes Equity, all financial assistance specified in the Financing Agreements and Subordinated Debt, if any;

"Financing Agreements" means the agreements executed by the Concessionaire in respect of financial assistance to be provided by the Senior Lenders by way of loans, guarantees, subscription to non-convertible debentures and other debt instruments including loan agreements, guarantees, notes, debentures, bonds and other debt instruments, security agreements, and other documents relating to the financing (including refinancing) of the Total Project Cost, and includes amendments or modifications made in accordance with Clause 5.2.3;

"Force Majeure" or "Force Majeure Event" shall have the meaning ascribed to it in Clause 28.1;

"GOI" means the Government of India**;**

"Good Industry Practice" means the practices, methods, techniques, designs, standards, skills, diligence, efficiency, reliability and prudence which are generally and reasonably expected from a reasonably skilled and experienced operator engaged in the same type of undertaking as envisaged under this Agreement and which would be expected to result in the performance of its obligations by the Concessionaire in accordance with this Agreement, Applicable Laws and Applicable Permits in reliable, safe, economical and efficient manner and for providing safe, economical, reliable and efficient use of the Project;

"Government" means the Government of the India;

"Government Instrumentality" means any department, division or sub-division of the Government or the State Government and includes any commission, board, authority, agency or municipal and other local authority or statutory body, including Panchayat, under the control of the Government or the State Government, as the case may be, and having jurisdiction over all or any part of the Project or the performance of all or any of the services or obligations of the Concessionaire under or pursuant to this Agreement;

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

"Indemnified Party" means the Party entitled to the benefit of an indemnity pursuant to Article 36;

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

"Indemnifying Party" means the Party obligated to indemnify the other Party pursuant to Article 36;

"Independent Engineer" shall have the meaning as set forth in Clause 21.1;

"Indirect Political Event" shall have the meaning as set forth in Clause 28.3;

"Insurance Cover" means the aggregate of the maximum sums insured under the insurances taken out by the Concessionaire pursuant to Article 26, and includes all insurances required to be taken out by the Concessionaire under Clause 26.2 but not actually taken, and when used in the context of any act or event, it shall mean the aggregate of the maximum sums insured and payable or deemed to be insured and payable in relation to such act or event;

"Intellectual Property" means all patents, trademarks, service marks, logos, get-up, trade names, internet domain names, rights in designs, blue prints, programs and manuals, drawings, copyright (including rights in computer software), database rights, semi-conductor, topography rights, utility models, rights in know-how and other intellectual property rights, in each case whether registered or unregistered and including applications for registration, and all rights or forms of protection having equivalent or similar effect anywhere in the world;

"LOA" or "Letter of Award" means the letter of award referred to in Recital(D);

"Lead Member" shall have the meaning set forth in Recital (D);

"Lenders' Representative" means the person duly authorized by the Senior Lenders to act for and on behalf of the Senior Lenders with regard to matters arising out of or in relation to this Agreement, and includes his successors, assigns and substitutes;

"Licensed Premises" shall have the meaning as set forth in Clause 10.2.2;

"MoRTH" means the Ministry of Road Transport and Highways or any substitute thereof dealing with highways;

"Maintenance Manual" shall have the meaning as set forth in Clause 17.3.1;

"Maintenance Program" shall have the meaning as set forth in Clause 17.4.1;

"Maintenance Requirements" shall have the meaning as set forth in Clause 17.2;

"Material Adverse Effect" means a material adverse effect of any act or event on the ability of either Party to perform any of its obligations under and in accordance with the provisions of this Agreement and which act or event causes a material financial burden or loss to either Party;

"Nominated Company" means a company selected by the Lenders' Representative and proposed to the Authority for substituting the Concessionaire in accordance with the provisions of the Substitution Agreement;

"Non-Political Event" shall have the meaning as set forth in Clause 28.2;

"O&M" means the operation and maintenance of the Project and includes all matters connected with or incidental to such operation and maintenance, and provision of services and facilities, in accordance with the provisions of this Agreement;

"O&M Contract" means the operation and maintenance contract that may be entered into between the Concessionaire and the O&M Contractor for performance of all or any of the O&M obligations;

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD0561149(Web-PROXKey)
Date: 29-Aug-2024 20:06:49

"O&M Contractor" means the person, if any, with whom the Concessionaire has entered into an O&M Contract for discharging O&M obligations for and on behalf of the Concessionaire;

"O&M Expenses" means expenses incurred by or on behalf of the Concessionaire or by the Authority, as the case may be, for all O&M including (a) cost of salaries and other compensation to employees, (b) cost of materials, supplies, utilities and other services, (c) premier for insurance, (d) all taxes, duties, cess and fees due and payable for O&M, (e) all repair, replacement, reconstruction, reinstatement, improvement and maintenance costs, (f) payments required to be made under the O&M Contract or any other contract in connection with or incidental to O&M, and (g) all other expenditure required to be incurred under Applicable Laws, Applicable Permits or this Agreement;

"O&M Inspection Report" shall have the meaning as set forth in Clause 19.2;

"O&M Payments" shall have the meaning as set forth in Clause 23.7.1**;**

"Operation Period" means the operation and maintenance period of 15 (fifteen) years commencing from COD and ending on the Transfer Date;

"**Parties"** means the parties to this Agreement collectively and "Party" shall mean any of the parties to this Agreement individually;

"**Payment Milestone"** shall have the meaning as set forth in Clause 23.4;

"Performance Guarantee" shall have the meaning as set forth in Clause 33.2.3;

"Performance Security" shall have the meaning as set forth in Clause 9.1.1;

"Physical Progress" shall mean the physical construction of the Project completed by the Concessionaire and shall be measured as per the assessment done by the Independent Engineer in accordance with Clause 23.4 of this Agreement.

"Political Event" shall have the meaning as set forth in Clause 28.4;

"Price Index" shall comprise:

(a) 70% (seventy per cent) of WPI; and

(b) 30% (thirty per cent) of CPI (IW),

Which constituents may be substituted by such alternative index or indices as the Parties may by mutual consent determine;

"Price Index Multiple" shall have the meaning set forth in 23.2.3;

"Project" means the construction, operation and maintenance of the Project in accordance with the provisions of this Agreement, and includes all works, services and equipment relating to or in respect of the Scope of the Project in Site comprising the Construction work of 4-laning of Shahganj bypass end to Badi (Package-IV) of NH-146B from design km 102.000 to design km 142.357 (Design Length 40.357 km) under NH(O) in the State of Madhya Pradesh and all Project Assets, and its subsequent development and augmentation in accordance with this Agreement;

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed,
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29 Dec 2014 20:06:49

"Project Agreements" means this Agreement, the Financing Agreements, EPC Contract, O&M Contract, and any other material agreements or contracts that may be entered into by the Concessionaire with any person in connection with matters relating to, arising out of or

incidental to the Project, but does not include the Escrow Agreement, Substitution Agreement, or any agreement for procurement of goods and services involving a consideration of up to Rs. 25 crore (twenty five crore)[9];

"Project Assets" means all physical and other assets relating to and forming part of the Site including (a) rights over the Site in the form of license, Right of Way or otherwise; (b) tangible assets such as civil works and equipment including foundations, embankments, pavements, road surface, interchanges, bridges, culverts, road over bridges, drainage works, traffic signals, sign boards, kilometer-stones, toll plaza(s), electrical systems, communication systems, rest areas, relief centers, maintenance depots and administrative offices; (c) Project Facilities situated on the Site; (d) all rights of the Concessionaire under the Project Agreements; (e) financial assets, such as receivables, security deposits etc.; (f) insurance proceeds; and (g) Applicable Permits and authorizations relating to or in respect of the Project;

"Project Completion Schedule" means the progressive Project Milestones set forth in Schedule-G for completion of the Project on or before the Scheduled Completion Date;

"Project Facilities" means all the amenities and facilities situated on the Site, as described in Schedule-C;

"Project Highway" means the Site comprising the existing road comprising Construction work of 4-laning of Shahganj bypass end to Badi (Package-IV) of NH-146B from design km 102.000 to design km 142.357 (Design Length 40.357 km) under NH(O) in the State of Madhya Pradesh and all Project Assets, and its subsequent development and augmentation in accordance with this Agreement;

"Project Milestones" means the project milestones as set forth in Schedule-G;

"Provisional Certificate" shall have the meaning as set forth in Clause 14.3;

"Punch List" shall have the meaning ascribed to it in Clause 14.3.1 and, if applicable, shall only include any or all of the below:

(i) plantation of avenue trees along the edge of the RoW and other landscaping works within RoW
(ii) completion of work on Provision of Unlined Roadside Drains
(iii) lining of roadside drains in identified stretches
(iv) construction of rest areas, as approved
(v) completion of Fencing Works of RoW
(vi) turfing on embankment slopes in identified sections
(vii) pointing to Stone Masonry works in identified Cross Drainage Structures
(viii) stone Pitching at identified locations

"RBI" means the Reserve Bank of India, as constituted and existing under the Reserve Bank of India Act, 1934, including any statutory modification or replacement thereof, and its successors;

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

[9]This may be fixed at the higher of: (a) 2% (two per cent) of Total Project Cost and (b) Rs. 25 (twenty five) crore.

"Re.", "Rs ." or "Rupees" or "Indian Rupees" means the lawful currency of the Republic of India;

"Reference Exchange Rate" means, in respect of any one currency that is to be converted into another currency in accordance with the provisions of this Agreement, the exchange rate as of 12.00 (twelve) noon on the relevant date quoted in Delhi by the State Bank of India, and in the absence of such rate, the average of similar rates quoted in Delhi by the Bank of India and the Bank of Baroda;

"Reference Index Date" means, in respect of the specified date or month, as the case may be, that last day of the preceding month with reference to which the Price Index or any constituent thereof is revised and in the event such revision has not been notified, the last such Price Index or any constituent thereof shall be adopted provisionally and used until the Price Index or such constituent thereof is revised and notified;

"Request for Proposals" or "RFP" shall have the meaning as set forth in Recital (B);

"Right of Way" means the constructive possession of the Site, together with all way leaves, easements, unrestricted access and other rights of way, howsoever described, necessary for construction, operation and maintenance of the Project in accordance with this Agreement;

"Safety Consultant" shall have the meaning as set forth in Clause 18.1.2;

"Safety Requirements" shall have the meaning as set forth in Clause 18.1.1;

"Scheduled Completion Date" shall have the meaning as set forth in Clause 12.3.1;

"Scope of the Project" shall have the meaning as set forth in Clause 2.1;

"Senior Lenders" means the financial institutions, banks, multilateral lending agencies, trusts, funds and agents or trustees of debenture holders, including their successors and assignees, who have agreed to guarantee or provide finance to the Concessionaire under any of the Financing Agreements for meeting all or any part of the Total Project Cost and who hold pari passu charge on the assets, rights, title and interests of the Concessionaire;

"Site" shall have the meaning as set forth in Clause 10.1;

"**Specifications and Standards"** means the specifications and standards relating to the quality, quantity, capacity and other requirements for the Project, as set forth in Schedule-D, and any modifications thereof, or additions thereto, as included in the design and engineering for the Project submitted by the Concessionaire to, and expressly approved by, the Authority;

"State" means the State of Madhya Pradesh and "**State Government**" means the government of that State;

"Statutory Auditors" means a reputable firm of chartered accountants acting as the statutory auditors of the Concessionaire under the provisions of the Companies Act, 2013, including any re-enactment or amendment thereof, for the time being in force, and appointed in accordance with Clause 27.2.1;

"Subordinated Debt" means the aggregate of the following sums expressed in Indian Rupees or in the currency of debt, as the case may be, outstanding as on the Transfer Date:

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WIN15L1440(WC PROXKey)
Date: 29-Aug-2024 20:06:49

(a) the principal amount of debt provided by lenders or the Concessionaire's shareholders for meeting the Total Project Cost and subordinated to the financial assistance provided by the Senior Lenders; and

(b) all accrued interest on the debt referred to in Sub-clause (a) above but restricted to the lesser of actual interest rate and a rate equal to 5% (five per cent) above the Bank Rate in case of loans expressed in Indian Rupees and lesser of the actual interest rate and 6 (six) month LIBOR (London Inter-Bank Offer Rate) plus 2% (two per cent) in case of loans expressed in foreign currency, but does not include any interest that had fallen due 1 (one) year prior to the Transfer Date;

provided that if all or any part of the Subordinated Debt is convertible into Equity at the option of the lenders and/or the Concessionaire's shareholders, it shall for the purposes of this Agreement be deemed to be Subordinated Debt even after such conversion and the principal thereof shall be dealt with as if such conversion had not been undertaken;

"Substitution Agreement" shall have the meaning as set forth in Clause 34.3.1;

"Suspension" shall have the meaning as set forth in Clause 30.1;

"Taxes" means any Indian taxes including GST, excise duties, customs duties, value added tax, sales tax, local taxes, cess and any impost or surcharge of like nature (whether Central, State or local) on the goods, materials, equipment and services incorporated in and forming part of the Project charged, levied or imposed by any Government Instrumentality, but excluding any interest, penalties and other sums in relation thereto imposed on any account whatsoever. For the avoidance of doubt, Taxes shall not include taxes on corporate income;

"Termination" means the expiry or termination of this Agreement and the Concession hereunder;

"Termination Notice" means the communication issued in accordance with this Agreement by one Party to the other Party terminating this Agreement;

"Termination Payment" means the amount payable by the Authority to the Concessionaire, under and in accordance with the provisions of this Agreement, upon Termination;

"Tests" means the tests set forth in Schedule-I to determine the completion of the Project in accordance with the provisions of this Agreement;

"Total Project Cost" means 60 % (sixty percent) of the Bid Project Cost specified in Clause 23.1;

provided that in the event WPI increases, on an average, by more than 3% (three per cent) per annum for the period between the Bid Date and COD, the amount hereinbefore specified shall be increased such that the effect of increase in WPI, in excess of such 3% (three per cent), is reflected in the Total Project Cost;

provided further that in the event of Termination, the Total Project Cost shall be deemed to be modified to the extent of variation in WPI or Reference Exchange Rate [illegible] in respect of Debt Due, as the case may be, in accordance with the provisions of this Agreement;

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Provided also that the Total Project Cost shall not exceed 60% of the actual capital expenditure on the Project and capitalized in the books of accounts of the Concessionaire as certified by the Statutory Auditor. ;

"Transfer Date" means the date on which this Agreement and the Concession hereunder expires pursuant to the provisions of this Agreement or is terminated by a Termination Notice;

"User" means a person who uses or intends to use the Project or any part thereof in accordance with the provisions of this Agreement and Applicable Laws;

"Vesting Certificate" shall have the meaning as set forth in Clause 32.4; and

"WPI" means the Wholesale Price Index for all commodities as published by the Ministry of Industry, GOI and shall include any index which substitutes the WPI, and any reference to WPI shall, unless the context otherwise requires, be construed as a reference to the latest monthly WPI published no later than 30 (thirty) days prior to the date of consideration hereunder.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Schedules

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Schedules		
A	**Site of the Project Highway**	
	1	The Site
		Annex-I: Site
		Annex-II: Dates for Providing Right of Way
		Annex III: Alignment Plans
B	**Development of Project Highway**	
	1	Development of the Project Highway
	2	Rehabilitation and Augmentation
	3	Specifications and Standards
		Annex I: Description of the Project
		Annex II: Typical Cross Sections
C	**Project Facilities**	
	1	Project Facilities
		Annex-I: Project Facilities
D	**Specifications and Standards**	
	1	Construction
	2	Design Standards
		Annex-I: Specifications and Standards for Construction
E	**Applicable Permits**	
	1	Applicable Permits
F	**Performance Security**	
		Annex-I : Format for Guarantee for Mobilization Advance
		Annex-II : Form of Surety Bond
G	**Project Completion Schedule**	
	1	Project Completion Schedule
	2	Project Milestone-I
	3	Project Milestone-II
	4	Project Milestone-III
	5	Scheduled Completion Date
	6	Extension of Period
		Annex-I : Contract Price Weightages
H	**Drawings**	
	1	Drawings
	2	Additional drawings
		Annex-I: List of Drawings

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619 79(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

I	**Tests**	
	1	Schedule for Tests
	2	Tests
	3	Agency for conducting Tests
	4	Completion/Provisional Certificate
	5	Tests during construction
J	**Completion Certificate**	
	1	Completion Certificate
	2	Provisional Certificate
K	**Maintenance Requirements**	
	1	Maintenance Requirements
	2	Repair/rectification of defects and deficiencies
	3	Other defects and deficiencies
	4	Extension of time limit
	5	Emergency repairs/restoration
	6	Daily Inspection by the Concessionaire
	7	Divestment Requirements
	8	Display of Schedule K
	Annex-I: Repair/rectification of defects and deficiencies	
L	**Safety Requirements**	
	1	Guiding Principles
	2	Obligations of the Concessionaire
	3	Appointment of Safety Consultant
	4	Safety measures during Development Period
	5	Safety measures during Construction Period
	6	Safety measures during Operation Period
	7	Costs and expenses
M	**Selection of Independent Engineer**	
	1	Selection of Independent Engineer
	2	Terms of Reference
	3	Fee and expenses
	4	Selection every three years
	5	Appointment of government entity as Independent Engineer
N	**Terms of Reference for Independent Engineer**	
	1	Scope
	2	Definitions and interpretation
	3	Role and functions of Independent Engineer

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051617 9(Pradeep
Signature Not Verified
Digitally Signed,
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

	4	Development Period
	5	Construction Period
	6	Operation Period
	7	Termination
	8	Determination of costs and time
	9	Assistance in Dispute resolution
	10	Other duties and functions
	11	Miscellaneous
O	**Escrow Agreement**	
	1	Definitions and Interpretation
	2	Escrow Account
	3	Deposits Into Escrow Account
	4	Withdrawals from Escrow Account
	5	Obligations of the Escrow Bank
	6	Escrow Default
	7	Termination of Escrow Agreement
	8	Supplementary Escrow Agreement
	9	Indemnities
	10	Dispute Resolution
	11	Miscellaneous Provisions
P	**Panel of Chartered Accountants**	
	1	Panel of Chartered Accountants
	2	Invitation for empanelment
	3	Evaluation and selection
	4	Consultation with the Concessionaire
	5	Mutually agreed panel
Q	**Vesting Certificate**	
R	**Substitution Agreement**	
	1	Definitions and interpretation
	2	Assignment
	3	Substitution of the Concessionaire
	4	Project Agreements
	5	Termination of Concession Agreement
	6	Duration of the Agreement
	7	Indemnity
	8	Dispute Resolution
	9	Miscellaneous Provisions

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051617 9(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

S	Procedure for Dispute Resolution Board
1	**Annexure to Schedule S**
	Dispute Resolution Board's Rules and procedures
	Board Member's Declaration of Acceptance
	Schedule of expenses and fees payable to the Member (s) of Dispute Resolution Board (DRB)

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051 6179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Schedule - A

(See Clause 2.1 and 8.1)

SITE OF THE PROJECT HIGHWAY

1 The Site

1.1 Site of the Project Highway shall include the land, buildings, Structures and road works as described in Annex-I of this Schedule-A.

1.2 The dates of handing over the Right of Way to the Concessionaire are specified in Annex-II of this Schedule-A.

1.3 An inventory of the Site including the land, buildings, Structures, road works, trees and any other immovable property on, or attached to, the Site shall be prepared jointly by the Authority Representative and the Concessionaire, and such inventory shall form part of the memorandum referred to in Clause 8.2.1 of this Agreement.

1.4 The alignment plans of the Project Highway are specified in Annex-III. The proposed profile of the Project Highways shall be followed by the Concessionaire with minimum FRL as indicated in the alignment plan. The Concessionaire, however, improve/upgrade the Road Profile as indicated in Annex-III based on site/design requirement with prior approval from IE and Authority.

1.5 The status of the Environmental, Forest and Wildlife Clearances are given in Annex-IV.

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516179(Pradeep

Signature Not Verified
Digitally Signed
Name: PROXKey IV 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Annex – I

(Schedule-A)

SITE

1. The Site

The site of 4-laning of Shahganj Bypass end to Badi (Package-IV) of NH-146B from (Ex. Ch-111+250) design km 102.000 to (Ex. Ch.- 150+712) design km 142.357 (Design Length 40.357 km) under NH(O) in the State of Madhya Pradesh.

An Index Map of the Project Highway is given at Appendix A-I and the proposed coordinates of the alignment (Centerline and Edge of ROW) are given in Annex-III.

2. Land

The Site of the Project Highway comprises the land (sum total of the land already in possession) as described below:

Sl. No.	Existing Chainages (Km)		Design Chainages (Km)		ROW Width (m)	Remarks
	From	To	From	To		
1	111+250	150+712	102+000	142+357	8-30	

3. Carriageway

The present Carriageway of the Project Highway is an existing road. The detail of existing carriageway width is given in Appendix-A-II.

4. Major Bridges

The Site includes the following Major Bridges:

Existing Major Bridges

Sl. No.	Existing Chainage (Km)	Design Chainage (Km)	Type of Structure			No. of Spans with Span Length (m)	Width (m)
			Foundation	Sub-Structure	Super structure		
1.	118+800	109+550	Open	Stone	Solid	10x8.60	9.0

5. Road Over Bridges (ROB)/ ROAD Under Bridges (RUB)

The Site includes the following ROB (road over railway line)/RUB (road under railway Line):

Sl. No.	Chainage (Km)	Type of Structure		No. of Spans with Span Length (m)	Width (m)	ROB/ RUB
		Foundation	Superstructure			
Nil						

6. Grade Separators

The Site includes the following grade separators:

Sl. No.	Chainage (Km)	Type of Structure		No. of Spans with Span Length (m)	Width (m)
		Foundation	Superstructure		

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey (2048) WD05611496(WD PROXKey)
Date: 29 Aug 2024 20:06:49

Nil

7. Minor Bridges

The Site includes the following minor bridges:

Sl. No.	Existing Chainage (Km)	Design Chainage (Km)	Type of Structure			No of Spans with Span Length (m)	Width * (m)
			Foundation	Sub Structure	Super Structure		
1.	114+980	105+740	Open	RCC wall	Solid Slab	2x9.0	12.0
2.	116+450	107+195	Open	Stone Masonry	Solid Slab	3x5.40	9.00
3.	118+000	108+760	Open	Stone Masonry	Solid Slab	1x6.10	9.00
4.	118+660	109+400	Open	Stone Masonry	Solid Slab	3x8.00	8.50
5.	123+625	114+365	Open	RCC wall	Solid Slab	1x6.00	12.00
6.	125+725	116+440	Open	RCC wall	Solid Slab	2x5.0	15.50
7.	128+960	119+700	Open	RCC wall	Solid Slab	2x6.40	12.00
8.	130+000	120+735	Open	RCC wall	Solid Slab	4x6.40	12.00
9.	132+480	123+235	Raft	Box type	Box type	1x6.00	12.00
10.	144+990	135+950	Open	RCC wall	Solid Slab	2x2.50	9.00
11.	146+200	137+175	Raft	Box type	Box type	3x5.00	12.00

8. Railway Level Crossings

The Site includes the following railway level crossings:

Sl. No.	Existing Chainage (km)	Design Chainage	Remarks
Nil			

9. Underpasses (Vehicular, Non-Vehicular)

The Site includes the following underpasses:

Sl. No.	Existing Chainage (km)	Design Chainage (km)	Type of Structure	No. of Spans with span length (m)	Width (m)
1.	150+712	142+357	VOP	2x9.00	30.00

10. Culverts

The Site has the following culverts:

Sl. No.	Existing Chainage (km)	Design Chainage (km)	Type of Culvert	Span / Opening with Span Length (m)	Width (m)
1	112+310	103+100	HPC	1X1.0	15
2	114+190	104+950	HPC	1X1.0	13
3	115+015	105+760	Pipe Line	2x1.5	13
4	115+600	106+345	SLAB	1X3.0/ 1X2.0	13
5	115+760	106+540	SLAB	1X3.0/ 1X2.0	12

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003-CSP India v3.0-HS230713051613(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey v3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

6	115+950	106+710	SLAB	1x4.4/1x3.4	12
7	121+040	111+790	HPC SKEW CANAL	1X1.0	15.0/ 17.0
8	123+370	114+100	HPC	1X1.0	15
9	124+150	114+870	HPC CANAL	1X1.0	15
10	124+320	115+050	HPC	1X1.0	15
11	127+680	118+420	HPC CANAL	1X1.0	15
12	129+630	120+300	HPC	1X1.0	15
13	131+300	122+075	HPC CANAL	1X1.0	15
14	132+780	123+535	SLAB	1x4.0	12
15	134+330	124+520	HPC	2X1.0	19
16	140+700	131+640	HPC (UD)	1X0.3	-
17	141+150	132+110	HPC (UD)	1X0.3	-
18	141+250	132+215	HPC (UD)	1X0.3	-
19	142+250	133+200	SLAB	1X4.0	12
20	144+800	135+775	HPC	1X1.0	15
21	146+015	136+985	HPC CANAL	1X1.0	15
22	148+175	139+135	HPC	1X1.0	12
23	148+280	139+240	HPC	1X1.0	15
24	148+970	139+925	SLAB CANAL	1X3.5	9
25	150+670	141+480	HPC CANAL	1X1.0	18

11.

11. Bus bays

The details of Bus bays on the site are as follows:

Sl. No.	Chainage (Km)	Length (m)	Left Hand Side	Right Hand Side
Nil				

12. Truck Lay Byes

The details of truck lay byes are as follows:

Sl. No.	Chainage (Km)	Length (m)	Left Hand Side	Right Hand Side
Nil				

13. Road Side Drains

The details of roadside drains are as follows:

Sr. No.	Existing Chainage		Design Chainage		Type		Side	Width of Drain	Remark
	FROM (Km)	TO (Km)	FROM (Km)	TO (Km)	Masonry/cc (Pucca)	Earthen (Kutcha)			
1	117+500	117+900	108+235	108+635	Cover CC Drain	-	LHS	1.0m	
2	119+100	119+750	109+830	110+480	-	Earthen	BHS	2.0m	top width
3	121+590	122+180	112+320	112+910	CC Drain Cum FP	-	BHS	1.0m	
4	123+000	124+350	113+730	115+080	-	Earthen	BHS	2.0m	top width
5	124+350	124+800	115+080	115+530	-	Earthen	RHS	2.0m	top

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051617912(Pradeep)
Signature Not Verified
Digitally Signed
Name: PROXKey(V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

									width
6	124+800	125+010	115+530	115+740	CC Drain Cum FP	-	BHS	1.0m	
7	133+840	135+350	Abandoned		CC Drain Cum FP	-	BHS	1.0m	

14. Major Junctions

The details of major junctions are as follows:

Sl.No	Existing Chainage (km)	Design Chainage (km)	Link		Type of Junction (X/T/Y/+)	Category	Remark
			LHS	RHS		SH/NH	
1	150+700	142+357	Bhopal	Jabalpur	+	NH-45	

(NH: National Highway, SH: State Highway, MDR: Major District Road, ODR: Other District Road, VR: Village Road)

15. Minor Junctions

The details of minor junctions are as follows:

Sr.	Existin CH	Design Chainage (Km)	Junction Type	Leads to		Category of Cross Road	Carriageway width Cross Road	Remarks
				Left	Right			
1	111+585	102.335	T	Sudon Village	-	VR	3.75	
2	113+083	103.800	T	Sudon Village	-	VR	3.75	
3	113+221	103.975	T	-	Baneta Village	VR	3.75	
4	114+527	105.28	X	Panari	Baneta	VR	5.5	
5	114+553	105.750	+	Ukai Lake	Baneta plant	VR	3.75	
6	115+524	106.150	+	Stone query	Ware house	VR	5.50	
7	115+781	106.380	T	-	Stone query	ER	3.00	
8	115+767	106.500	T	-	Stone query	ER	3.00	
9	115+900	106.630	T	-	Stone query	ER	3.00	
10	116+139	106.885	T	Dungariy	-	VR	5.50	
11	117+487	108.230	+	Jawahar Kheda	Sudania	VR	3.75	
12	118+124	108.85	T	Village	-	VR	5.50	
13	118+533	109.260	T	Satramau	-	VR	3.75	

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey V 3.0-WD0501496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

14	119+750	110.48	X	Itwar	Hatnora	VR	5.50	
15	121+775	112.500	T	-	Hathnora	VR	3.75	
16	121+983	112.71	X	Dobi	Sardarnagar	VR	5.50	
17	122+837	113.575	X	Dobi	Jait	VR	5.50	
18	123+684	114.420	T	Dobi	-	VR	3.75	
19	124+948	115.675	X	Machwai	Jait	VR	5.50	
20	126+183	116.930	+	Machhwai	Narmada Ghat	VR	3.75	
21	127+118	117.835	+	Amon	Local Road	VR	3.75	
22	127+956	118.69	X	Sagpur	Nandner	VR	5.50	
23	129+543	120.275	T	-	Jontala	VR	5.50	
24	130+589	121.330	T	Kosmi	-	VR	3.75	
25	132+152	122.89	X	Siya	Jontala	VR	5.50	
26	133+800		T	Baktara	-	VR	3.75	
27	134+500	125.000	+	Baktara	Khandwara	VR	3.75	
28	134+750	125.610	+	Baktara	Sagoniya	VR	3.75	
29	134+913	126.120	+	Baktara	Kutnasir	VR	3.75	
30	135+050		T	Bhaisaya	-	VR	3.75	
31	136+970	127.94	X	Digwar	Kutnasir	VR	5.50	
32	140+440	131.395	T	-	Chandwar	VR	5.50	
33	142+223	133.190	T	Gajikhedi	-	VR	3.75	
34	143+703	134.680	T	-	Amarwad	VR	3.75	
35	144+980	135.95	X	Canal Road	Canal Road	Canal	5.50	
36	146+561	137.52	X	Village	Babi	VR	5.50	
37	147+394	138.36	T	Patni	-	VR	5.50	
38	147+44	138.410	T	-	Babai	VR	3.75	

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

	0							
39	148+971	139.93	X	Canal Road	Canal Road	Canal	5.50	

16. Bypasses

The details of the existing bypasses:

Sl. No.	Name of bypass (town)	Existing Chainage (km)		Design Length (in Km)
		From	To	
Nil				

17. Detail of any Other Structures

Sl. No.	Chainage (km)	Type of Structure	No. of Spans with Span Length (m)	Width (m)
Nil				

18. Utility

The existing utility to be shifted/ relocated are listed in **Appendix A-III**

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619(Pradeep

Signature Not Verified
Digitally Signed
Name: PROXKey IV 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Annex II
(Schedule-A)
Dates for Providing Right of Way

The dates on which the Authority shall provide Right of Way to the Concessionaire on different parts of the Site is stated below:

Sl. No.	Stretches (Design Km)		Length (km)	Width (m)	Date of Providing ROW
	From	To			
I) Full Right of Way (Full width)					
1	102.000	104.840	2.840	45	ROW shall be provided within 120 days of Date of appointment
2	104.840	105.440	0.600	50	
3	105.440	106.300	0.860	45	
4	106.300	107.020	0.720	50	
5	107.020	108.380	1.360	45	
6	108.380	108.920	0.540	50	
7	108.920	109.700	0.780	50	
8	109.700	109.860	0.160	45	
9	109.860	110.720	0.860	50	
10	110.720	112.000	1.280	45	
11	112.000	113.700	1.700	50	
12	113.700	115.120	1.420	45	
13	115.120	116.040	0.920	50	
14	116.040	117.860	1.820	45	
15	117.860	118.950	1.090	50	
16	118.950	119.740	0.790	45	
17	119.740	120.420	0.680	50	
18	120.420	122.300	1.880	45	
19	122.300	123.120	0.820	50	
20	123.120	123.740	0.620	45	
21	123.740	124.660	0.920	50	
22	124.660	124.880	0.220	45	
23	124.880	125.860	0.980	50	
24	125.860	126.840	0.980	50	
25	126.840	127.300	0.460	45	
26	127.300	128.200	0.900	50	
27	128.200	130.200	2.000	45	
28	130.200	130.750	0.550	45	
29	130.750	130.840	0.090	45	
30	130.840	131.600	0.760	50	
31	131.600	132.300	0.700	45	
32	132.300	135.220	2.920	45	
33	135.220	136.260	1.040	50	
34	136.260	136.940	0.680	45	

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

35	136.940	137.660	0.720	50	
36	137.660	137.740	0.080	45	
37	137.740	138.500	0.760	50	
38	138.500	139.300	0.800	45	
39	139.300	140.480	1.180	50	
40	140.480	142.357	1.877	45	
	Total		40.357		

Note: -

1. The Complete details of ROW shall be as per Anex-III of Schedule-A.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey IV 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Annex – III

(Schedule-A)

Alignment Plans

Following drawings are enclosed in digital form in CD marked as **Annex –III**

- Alignment Plan & Longitudinal Profile.
- Proposed center line/Edge coordinates of ROW.
- GAD of Structures.
- Utility Relocation Plan
- Drainage Plan.

Note

- *Finished road level indicated in the alignment plan shall be followed by the Concessionaire as minimum FRL. In any case, the finished road level of the project highway shall not be less than those indicated in the alignment plan. The Concessionaire shall, however, improve/upgrade the Road profile as indicated in Annex-III based on site/design requirement.*
- *Traffic Signage plan of the Project Highway showing numbers & location of traffic signs is enclosed in Schedule B. The Concessionaire shall, however, improve/upgrade upon the traffic signage plan as indicated based on site/design requirement as per the relevant specifications/IRC Codes/Manual.*
- The Co-ordinate of Centre Line are given Below:

Station	Easting	Northing	Tangential Directions
102000	2,530,885.4872m	787,753.9433m	N43° 31' 42.14"E
102050	2,530,921.8858m	787,788.2235m	N43° 15' 15.97"E
102100	2,530,958.3017m	787,822.4855m	N43° 15' 15.97"E
102150	2,530,994.7176m	787,856.7474m	N43° 15' 15.97"E
102200	2,531,031.1335m	787,891.0094m	N43° 15' 15.97"E
102250	2,531,067.5494m	787,925.2714m	N43° 15' 15.97"E
102300	2,531,103.9653m	787,959.5333m	N43° 15' 15.97"E
102350	2,531,140.3812m	787,993.7953m	N43° 15' 15.97"E
102400	2,531,176.7971m	788,028.0573m	N43° 15' 15.97"E
102450	2,531,213.2130m	788,062.3193m	N43° 15' 15.97"E
102500	2,531,249.6289m	788,096.5812m	N43° 15' 15.97"E
102550	2,531,286.0448m	788,130.8432m	N43° 15' 15.97"E
102600	2,531,322.4607m	788,165.1052m	N43° 15' 15.97"E
102650	2,531,358.8766m	788,199.3671m	N43° 15' 15.97"E
102700	2,531,395.2925m	788,233.6291m	N43° 15' 15.97"E
102750	2,531,431.7084m	788,267.8911m	N43° 15' 15.97"E
102800	2,531,468.1243m	788,302.1530m	N43° 15' 15.97"E
102850	2,531,504.5402m	788,336.4150m	N43° 15' 15.97"E
102900	2,531,540.9561m	788,370.6770m	N43° 15' 15.97"E
102950	2,531,577.2142m	788,405.1050m	N44° 13' 43.99"E
103000	2,531,611.9858m	788,441.0211m	N48° 04' 04.55"E
103050	2,531,643.8139m	788,479.5638m	N52° 00'E
103100	2,531,672.9527m	788,520.1899m	N55° 25'07"E
103150	2,531,701.1843m	788,561.4570m	N55° 39' 08.78"E
103200	2,531,729.3949m	788,602.7385m	N55° 39' 08.78"E
103250	2,531,757.6054m	788,644.0200m	N55° 39' 08.78"E
103300	2,531,785.8160m	788,685.3015m	N55° 39' 08.78"E

Signature Not Verified
Digitally Signed
Name: HyperPKIExp2003 CSP India v3.0-HS2307130516178(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey v3.0-WD0561496(WD PROXKey)
Date: 29 Aug 2024 20:06:49

103350	2,531,814.0266m	788,726.5830m	N55° 39' 08.78"E
103400	2,531,842.2372m	788,767.8645m	N55° 39' 08.78"E
103450	2,531,870.4478m	788,809.1461m	N55° 39' 08.78"E
103500	2,531,898.6583m	788,850.4276m	N55° 39' 08.78"E
103550	2,531,926.8473m	788,891.7239m	N55° 45' 34.47"E
103600	2,531,954.9117m	788,933.1049m	N55° 57' 02.02"E
103650	2,531,982.8380m	788,974.5792m	N56° 08' 29.57"E
103700	2,532,010.6259m	789,016.1464m	N56° 19' 57.12"E
103750	2,532,038.2751m	789,057.8059m	N56° 31' 24.67"E
103800	2,532,065.8190m	789,099.5352m	N56° 34' 53.19"E
103850	2,532,093.3566m	789,141.2687m	N56° 34' 53.19"E
103900	2,532,120.8941m	789,183.0021m	N56° 34' 53.19"E
103950	2,532,148.4317m	789,224.7356m	N56° 34' 53.19"E
104000	2,532,175.9692m	789,266.4691m	N56° 34' 53.19"E
104050	2,532,203.5068m	789,308.2026m	N56° 34' 53.19"E
104100	2,532,231.0443m	789,349.9360m	N56° 34' 53.19"E
104150	2,532,258.5819m	789,391.6695m	N56° 34' 53.19"E
104200	2,532,286.1195m	789,433.4030m	N56° 34' 53.19"E
104250	2,532,313.6570m	789,475.1365m	N56° 34' 53.19"E
104300	2,532,341.1946m	789,516.8699m	N56° 34' 53.19"E
104350	2,532,368.6581m	789,558.6521m	N56° 55' 21.25"E
104400	2,532,395.8795m	789,600.5924m	N57° 01' 23.52"E
104450	2,532,423.0945m	789,642.5370m	N57° 01' 23.52"E
104500	2,532,450.3094m	789,684.4815m	N57° 01' 23.52"E
104550	2,532,477.5244m	789,726.4261m	N57° 01' 23.52"E
104600	2,532,504.7394m	789,768.3706m	N57° 01' 23.52"E
104650	2,532,531.9543m	789,810.3152m	N57° 01' 23.52"E
104700	2,532,559.1693m	789,852.2597m	N57° 01' 23.52"E
104750	2,532,586.3843m	789,894.2043m	N57° 01' 23.52"E
104800	2,532,613.5993m	789,936.1488m	N57° 01' 23.52"E
104850	2,532,640.8142m	789,978.0934m	N57° 01' 23.52"E
104900	2,532,668.0105m	790,020.0500m	N57° 17' 36.33"E
104950	2,532,694.9125m	790,062.1960m	N57° 27' 33.59"E
105000	2,532,721.8074m	790,104.3465m	N57° 27' 33.59"E
105050	2,532,748.7023m	790,146.4970m	N57° 27' 33.59"E
105100	2,532,775.5972m	790,188.6475m	N57° 27' 33.59"E
105150	2,532,802.4921m	790,230.7980m	N57° 27' 33.59"E
105200	2,532,829.8375m	790,272.6561m	N56° 12' 05.00"E
105250	2,532,857.6512m	790,314.2060m	N56° 12' 05.00"E
105300	2,532,885.4650m	790,355.7559m	N56° 12' 05.00"E
105350	2,532,913.2788m	790,397.3058m	N56° 12' 05.00"E
105400	2,532,941.0925m	790,438.8557m	N56° 12' 05.00"E
105450	2,532,968.9063m	790,480.4056m	N56° 12' 05.00"E
105500	2,532,996.7201m	790,521.9555m	N56° 12' 05.00"E
105550	2,533,024.6771m	790,563.4087m	N55° 26' 53.19"E
105600	2,533,053.5465m	790,604.2306m	N54° 00' 56.57"E
105650	2,533,083.1874m	790,644.4972m	N53° 34' 28.85"E
105700	2,533,112.4673m	790,685.0258m	N54° 34' 28.81"E
105750	2,533,140.7386m	790,726.2643m	N56° 06' 43.03"E
105800	2,533,168.6172m	790,767.7707m	N56° 06' 43.03"E
105850	2,533,196.4958m	790,809.2772m	N56° 06' 43.03"E
105900	2,533,224.3744m	790,850.7836m	N56° 06' 43.03"E

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey v3.0-WD0561490(WD PROXKey)
Date: 29-Aug-2024 20:06:49

105950	2,533,252.2530m	790,892.2900m	N56° 06' 43.03"E
106000	2,533,280.1316m	790,933.7965m	N56° 06' 43.03"E
106050	2,533,308.0102m	790,975.3029m	N56° 06' 43.03"E
106100	2,533,335.8888m	791,016.8093m	N56° 06' 43.03"E
106150	2,533,363.7674m	791,058.3157m	N56° 06' 43.03"E
106200	2,533,391.6460m	791,099.8222m	N56° 06' 43.03"E
106250	2,533,419.5246m	791,141.3286m	N56° 06' 43.03"E
106300	2,533,447.4032m	791,182.8350m	N56° 06' 43.03"E
106350	2,533,475.2817m	791,224.3415m	N56° 06' 43.03"E
106400	2,533,503.1583m	791,265.8493m	N56° 12' 05.18"E
106450	2,533,530.5019m	791,307.7091m	N57° 10' 58.92"E
106500	2,533,557.5998m	791,349.7294m	N57° 10' 58.92"E
106550	2,533,584.6976m	791,391.7497m	N57° 10' 58.92"E
106600	2,533,611.7955m	791,433.7700m	N57° 10' 58.92"E
106650	2,533,638.8933m	791,475.7903m	N57° 10' 58.92"E
106700	2,533,665.8869m	791,517.8774m	N57° 49' 55.44"E
106750	2,533,691.3921m	791,560.8739m	N61° 19' 06.01"E
106800	2,533,713.2227m	791,605.8336m	N66° 57' 29.57"E
106850	2,533,730.4615m	791,652.7456m	N72° 41' 16.05"E
106900	2,533,743.1462m	791,701.0946m	N77° 27' 45.34"E
106950	2,533,753.0073m	791,750.1103m	N79° 17' 05.02"E
107000	2,533,762.2902m	791,799.2410m	N79° 18' 04.01"E
107050	2,533,771.5726m	791,848.3718m	N79° 18' 04.01"E
107100	2,533,780.8556m	791,897.5025m	N79° 15' 19.23"E
107150	2,533,790.7902m	791,946.5043m	N77° 49' 22.61"E
107200	2,533,801.7041m	791,995.2984m	N77° 17' 40.83"E
107250	2,533,812.7009m	792,044.0741m	N77° 17' 40.83"E
107300	2,533,823.6978m	792,092.8498m	N77° 17' 40.83"E
107350	2,533,834.4241m	792,141.6850m	N78° 14' 53.70"E
107400	2,533,844.4666m	792,190.6661m	N78° 25' 26.79"E
107450	2,533,854.4999m	792,239.6490m	N78° 25' 26.79"E
107500	2,533,864.5332m	792,288.6320m	N78° 25' 26.79"E
107550	2,533,874.5664m	792,337.6150m	N78° 25' 26.79"E
107600	2,533,884.5997m	792,386.5980m	N78° 25' 26.79"E
107650	2,533,894.6330m	792,435.5810m	N78° 25' 26.79"E
107700	2,533,904.6663m	792,484.5640m	N78° 25' 26.79"E
107750	2,533,914.6996m	792,533.5470m	N78° 25' 26.79"E
107800	2,533,924.7329m	792,582.5300m	N78° 25' 26.79"E
107850	2,533,934.7662m	792,631.5129m	N78° 25' 26.79"E
107900	2,533,944.7995m	792,680.4959m	N78° 25' 26.79"E
107950	2,533,954.8327m	792,729.4789m	N78° 25' 26.79"E
108000	2,533,964.8660m	792,778.4619m	N78° 25' 26.79"E
108050	2,533,974.8993m	792,827.4449m	N78° 25' 26.79"E
108100	2,533,984.8963m	792,876.4352m	N78° 46' 21.77"E
108150	2,533,994.3981m	792,925.5241m	N79° 04' 39.52"E
108200	2,534,003.8720m	792,974.6183m	N79° 04' 39.52"E
108250	2,534,013.3459m	793,023.7126m	N79° 04' 39.52"E
108300	2,534,022.8198m	793,072.8068m	N79° 04' 39.52"E
108350	2,534,032.2938m	793,121.9010m	N79° 04' 39.52"E
108400	2,534,041.7677m	793,170.9953m	N79° 04' 39.52"E
108450	2,534,051.2416m	793,220.0895m	N79° 04' 39.52"E
108500	2,534,060.7156m	793,269.1838m	N79° 04' 39.52"E

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS32307130516179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey(V3.0-WD0567496(WebPROXKey)
Date: 29-Aug-2024 20:06:49

108550	2,534,069.5962m	793,318.3875m	N80° 29' 06.02"E
108600	2,534,077.2442m	793,367.7978m	N81° 55' 02.64"E
108650	2,534,083.9784m	793,417.3421m	N82° 18' 53.46"E
108700	2,534,090.7034m	793,466.8877m	N82° 02' 13.44"E
108750	2,534,098.3424m	793,516.2988m	N80° 25' 12.58"E
108800	2,534,106.8191m	793,565.5750m	N80° 12' 35.31"E
108850	2,534,115.3212m	793,614.8469m	N80° 12' 35.31"E
108900	2,534,123.8232m	793,664.1187m	N80° 12' 35.31"E
108950	2,534,132.3252m	793,713.3906m	N80° 12' 35.31"E
109000	2,534,140.8231m	793,762.6631m	N80° 16' 44.57"E
109050	2,534,148.5354m	793,812.0615m	N82° 29' 33.60"E
109100	2,534,152.9812m	793,861.8453m	N87° 49' 12.67"E
109150	2,534,151.9566m	793,911.8091m	S85° 53' 38.42"E
109200	2,534,146.7237m	793,961.5275m	S82° 36' 30.15"E
109250	2,534,139.9529m	794,011.0668m	S82° 07' 42.73"E
109300	2,534,133.1054m	794,060.5957m	S82° 07' 42.73"E
109350	2,534,126.2578m	794,110.1246m	S82° 07' 42.73"E
109400	2,534,119.3644m	794,159.6471m	S81° 47' 35.21"E
109450	2,534,111.1978m	794,208.9703m	S78° 59' 53.79"E
109500	2,534,100.4194m	794,257.7908m	S76° 34' 50.67"E
109550	2,534,088.7019m	794,306.3984m	S76° 25' 51.02"E
109600	2,534,077.0273m	794,355.0163m	S76° 49' 14.88"E
109650	2,534,066.6892m	794,403.9302m	S79° 41' 38.18"E
109700	2,534,059.2773m	794,453.3698m	S83° 09' 35.63"E
109750	2,534,054.0848m	794,503.0983m	S84° 25' 45.26"E
109800	2,534,049.1977m	794,552.8588m	S84° 09' 16.65"E
109850	2,534,043.0891m	794,602.4789m	S81° 17' 23.69"E
109900	2,534,033.1774m	794,651.4635m	S75° 20' 01.36"E
109950	2,534,017.6156m	794,698.9499m	S68° 42' 02.65"E
110000	2,533,997.7188m	794,744.8105m	S64° 54' 38.83"E
110050	2,533,976.0373m	794,789.8645m	S64° 06' 36.49"E
110100	2,533,954.2051m	794,834.8463m	S64° 06' 36.49"E
110150	2,533,932.8793m	794,880.0689m	S65° 28' 00.53"E
110200	2,533,912.6537m	794,925.7945m	S66° 32' 38.95"E
110250	2,533,892.7516m	794,971.6628m	S66° 32' 38.95"E
110300	2,533,872.8495m	795,017.5312m	S66° 32' 38.95"E
110350	2,533,852.9474m	795,063.3995m	S66° 32' 38.95"E
110400	2,533,833.0453m	795,109.2679m	S66° 32' 38.95"E
110450	2,533,813.1432m	795,155.1362m	S66° 32' 38.95"E
110500	2,533,793.2411m	795,201.0046m	S66° 32' 38.95"E
110550	2,533,773.3389m	795,246.8729m	S66° 32' 38.95"E
110600	2,533,753.4368m	795,292.7413m	S66° 32' 38.95"E
110650	2,533,733.5347m	795,338.6096m	S66° 32' 38.95"E
110700	2,533,713.6326m	795,384.4780m	S66° 32' 38.95"E
110750	2,533,693.7305m	795,430.3464m	S66° 32' 38.95"E
110800	2,533,674.2355m	795,476.3880m	S67° 44' 57.78"E
110850	2,533,655.4577m	795,522.7279m	S67° 57' 22.25"E
110900	2,533,636.6919m	795,569.0728m	S67° 57' 22.25"E
110950	2,533,617.9281m	795,615.4184m	S67° 57' 22.26"E
111000	2,533,599.8081m	795,662.0168m	S70° 00' 00.58"E
111050	2,533,584.4872m	795,709.5975m	S74° 29' 58.08"E
111100	2,533,573.1467m	795,758.2796m	S79° 16' 26.81"E

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey v3.0-WD0550496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

111150	2,533,565.5233m	795,807.6875m	S82° 41' 19.95"E
111200	2,533,559.5828m	795,857.3331m	S83° 18' 36.86"E
111250	2,533,553.7582m	795,906.9927m	S83° 18' 36.86"E
111300	2,533,547.9335m	795,956.6522m	S83° 18' 36.86"E
111350	2,533,542.1088m	796,006.3118m	S83° 18' 36.86"E
111400	2,533,536.2842m	796,055.9714m	S83° 18' 36.86"E
111450	2,533,530.4595m	796,105.6310m	S83° 18' 36.86"E
111500	2,533,524.6348m	796,155.2905m	S83° 18' 36.86"E
111550	2,533,518.8102m	796,204.9501m	S83° 18' 36.86"E
111600	2,533,512.9855m	796,254.6097m	S83° 18' 36.86"E
111650	2,533,507.1609m	796,304.2692m	S83° 18' 36.86"E
111700	2,533,501.3362m	796,353.9288m	S83° 18' 36.86"E
111750	2,533,495.5115m	796,403.5884m	S83° 18' 36.86"E
111800	2,533,489.6869m	796,453.2480m	S83° 18' 36.86"E
111850	2,533,483.6586m	796,502.8830m	S82° 49' 02.41"E
111900	2,533,477.4070m	796,552.4907m	S82° 49' 02.41"E
111950	2,533,471.1553m	796,602.0983m	S82° 49' 02.41"E
112000	2,533,464.9037m	796,651.7059m	S82° 49' 02.41"E
112050	2,533,458.9877m	796,701.3536m	S84° 04' 49.46"E
112100	2,533,455.4434m	796,751.2168m	S88° 09' 54.88"E
112150	2,533,455.9254m	796,801.2000m	N87° 03' 36.39"E
112200	2,533,460.2681m	796,851.0026m	N83° 27' 06.87"E
112250	2,533,466.4743m	796,900.6155m	N82° 41' 14.48"E
112300	2,533,472.8385m	796,950.2089m	N82° 41' 14.48"E
112350	2,533,479.2026m	796,999.8022m	N82° 41' 14.48"E
112400	2,533,485.5668m	797,049.3955m	N82° 41' 14.48"E
112450	2,533,491.9310m	797,098.9888m	N82° 41' 14.48"E
112500	2,533,498.2952m	797,148.5821m	N82° 41' 14.48"E
112550	2,533,504.6593m	797,198.1754m	N82° 41' 14.48"E
112600	2,533,511.0235m	797,247.7688m	N82° 41' 16.23"E
112650	2,533,517.0842m	797,297.3994m	N83° 40' 38.88"E
112700	2,533,521.8996m	797,347.1654m	N85° 16' 08.46"E
112750	2,533,525.3371m	797,397.0455m	N86° 47' 01.84"E
112800	2,533,527.9469m	797,446.9773m	N87° 03' 18.64"E
112850	2,533,530.5156m	797,496.9113m	N87° 03' 18.64"E
112900	2,533,533.0844m	797,546.8453m	N87° 03' 18.64"E
112950	2,533,535.6531m	797,596.7792m	N87° 03' 18.64"E
113000	2,533,538.2218m	797,646.7132m	N87° 03' 18.64"E
113050	2,533,540.8123m	797,696.6460m	N86° 53' 08.43"E
113100	2,533,543.7783m	797,746.5578m	N86° 18' 45.78"E
113150	2,533,547.2433m	797,796.4374m	N85° 44' 23.14"E
113200	2,533,551.2069m	797,846.2798m	N85° 10' 00.49"E
113250	2,533,555.6687m	797,896.0801m	N84° 35' 37.84"E
113300	2,533,560.4481m	797,945.8512m	N84° 30' 30.32"E
113350	2,533,565.2331m	797,995.6217m	N84° 30' 30.32"E
113400	2,533,570.0181m	798,045.3922m	N84° 30' 30.32"E
113450	2,533,574.8030m	798,095.1627m	N84° 30' 30.32"E
113500	2,533,579.5880m	798,144.9332m	N84° 30' 30.32"E
113550	2,533,584.3730m	798,194.7037m	N84° 30' 30.32"E
113600	2,533,589.1580m	798,244.4742m	N84° 30' 30.32"E
113650	2,533,593.9733m	798,294.2418m	N84° 18' 29.81"E
113700	2,533,599.1808m	798,343.9697m	N83° 44' 07.16"E

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey(v3.0-WD0581496(MS PROXKey)
Date: 29-Aug-2024 20:06:49

113750	2,533,604.8516m	798,393.6469m	N83° 22' 23.65"E
113800	2,533,610.6217m	798,443.3129m	N83° 22' 23.65"E
113850	2,533,616.3918m	798,492.9788m	N83° 22' 23.65"E
113900	2,533,622.1618m	798,542.6448m	N83° 22' 23.65"E
113950	2,533,627.9319m	798,592.3107m	N83° 22' 23.65"E
114000	2,533,633.7019m	798,641.9767m	N83° 22' 23.65"E
114050	2,533,639.4720m	798,691.6426m	N83° 22' 23.65"E
114100	2,533,645.2125m	798,741.3120m	N83° 34' 14.51"E
114150	2,533,650.5766m	798,791.0232m	N84° 00' 32.10"E
114200	2,533,655.7953m	798,840.7502m	N84° 00' 32.10"E
114250	2,533,661.0140m	798,890.4771m	N84° 00' 32.10"E
114300	2,533,666.2327m	798,940.2040m	N84° 00' 32.10"E
114350	2,533,671.4514m	798,989.9309m	N84° 00' 32.10"E
114400	2,533,676.6701m	799,039.6578m	N84° 00' 32.10"E
114450	2,533,681.8887m	799,089.3847m	N84° 00' 32.10"E
114500	2,533,687.1074m	799,139.1116m	N84° 00' 32.10"E
114550	2,533,692.3261m	799,188.8385m	N84° 00' 32.10"E
114600	2,533,697.5448m	799,238.5654m	N84° 00' 32.10"E
114650	2,533,702.7635m	799,288.2923m	N84° 00' 32.10"E
114700	2,533,707.9822m	799,338.0192m	N84° 00' 32.10"E
114750	2,533,713.2009m	799,387.7461m	N84° 00' 32.10"E
114800	2,533,718.4195m	799,437.4730m	N84° 00' 32.10"E
114850	2,533,723.6382m	799,487.2000m	N84° 00' 32.10"E
114900	2,533,728.8569m	799,536.9269m	N84° 00' 32.10"E
114950	2,533,734.0756m	799,586.6538m	N84° 00' 32.10"E
115000	2,533,739.2943m	799,636.3807m	N84° 00' 32.10"E
115050	2,533,744.5130m	799,686.1076m	N84° 00' 32.10"E
115100	2,533,749.7316m	799,735.8345m	N84° 00' 32.10"E
115150	2,533,754.9503m	799,785.5614m	N84° 00' 32.10"E
115200	2,533,760.7397m	799,835.2238m	N82° 38' 08.90"E
115250	2,533,767.5230m	799,884.7613m	N82° 06' 15.17"E
115300	2,533,774.3916m	799,934.2873m	N82° 06' 15.17"E
115350	2,533,781.2602m	799,983.8133m	N82° 06' 15.17"E
115400	2,533,788.1287m	800,033.3393m	N82° 06' 15.17"E
115450	2,533,794.9973m	800,082.8653m	N82° 06' 15.17"E
115500	2,533,801.8659m	800,132.3912m	N82° 06' 15.17"E
115550	2,533,808.7345m	800,181.9172m	N82° 06' 15.17"E
115600	2,533,815.4153m	800,231.4683m	N82° 53' 34.09"E
115650	2,533,820.9808m	800,281.1563m	N84° 19' 30.71"E
115700	2,533,825.3025m	800,330.9679m	N85° 45' 27.33"E
115750	2,533,828.3777m	800,380.8719m	N87° 11' 23.95"E
115800	2,533,830.2525m	800,430.8359m	N88° 13' 29.85"E
115850	2,533,831.8013m	800,480.8119m	N88° 13' 29.85"E
115900	2,533,833.3501m	800,530.7879m	N88° 13' 29.85"E
115950	2,533,834.8988m	800,580.7639m	N88° 13' 29.85"E
116000	2,533,836.9247m	800,630.7216m	N86° 58' 22.70"E
116050	2,533,840.1889m	800,680.6137m	N85° 32' 26.08"E
116100	2,533,844.6992m	800,730.4085m	N84° 06' 29.46"E
116150	2,533,850.2707m	800,780.0968m	N83° 27' 06.70"E
116200	2,533,855.9726m	800,829.7706m	N83° 27' 06.70"E
116250	2,533,861.6745m	800,879.4444m	N83° 27' 06.70"E
116300	2,533,867.3764m	800,929.1183m	N83° 27' 06.70"E

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey(v7.3.0-WD0582149(With PROXKey)
Date: 29-Aug-2024 20:06:49

116350	2,533,873.0783m	800,978.7921m	N83° 27' 06.70"E
116400	2,533,878.4124m	801,028.5058m	N84° 23' 14.27"E
116450	2,533,883.3026m	801,078.2661m	N84° 23' 14.27"E
116500	2,533,888.1928m	801,128.0264m	N84° 23' 14.27"E
116550	2,533,893.0830m	801,177.7867m	N84° 23' 14.27"E
116600	2,533,897.9731m	801,227.5470m	N84° 23' 14.27"E
116650	2,533,902.8633m	801,277.3072m	N84° 23' 14.27"E
116700	2,533,907.7535m	801,327.0675m	N84° 23' 14.27"E
116750	2,533,912.6437m	801,376.8278m	N84° 23' 14.27"E
116800	2,533,917.5338m	801,426.5881m	N84° 23' 14.27"E
116850	2,533,922.4240m	801,476.3484m	N84° 23' 14.27"E
116900	2,533,927.3142m	801,526.1087m	N84° 23' 14.27"E
116950	2,533,932.2044m	801,575.8690m	N84° 23' 14.27"E
117000	2,533,937.0945m	801,625.6293m	N84° 23' 14.27"E
117050	2,533,941.9847m	801,675.3895m	N84° 23' 14.27"E
117100	2,533,946.8749m	801,725.1498m	N84° 23' 14.27"E
117150	2,533,951.7651m	801,774.9101m	N84° 23' 14.27"E
117200	2,533,956.6553m	801,824.6704m	N84° 23' 14.27"E
117250	2,533,961.5454m	801,874.4307m	N84° 23' 14.27"E
117300	2,533,966.4356m	801,924.1910m	N84° 23' 14.27"E
117350	2,533,971.3258m	801,973.9513m	N84° 23' 14.27"E
117400	2,533,976.2160m	802,023.7115m	N84° 23' 14.27"E
117450	2,533,981.1061m	802,073.4718m	N84° 23' 14.27"E
117500	2,533,985.9963m	802,123.2321m	N84° 23' 14.27"E
117550	2,533,990.8865m	802,172.9924m	N84° 23' 14.27"E
117600	2,533,995.7767m	802,222.7527m	N84° 23' 14.27"E
117650	2,534,000.6668m	802,272.5130m	N84° 23' 14.27"E
117700	2,534,005.5570m	802,322.2733m	N84° 23' 14.27"E
117750	2,534,010.4472m	802,372.0336m	N84° 23' 14.27"E
117800	2,534,015.3374m	802,421.7938m	N84° 23' 14.27"E
117850	2,534,020.2275m	802,471.5541m	N84° 23' 14.27"E
117900	2,534,024.9942m	802,521.3263m	N84° 47' 27.38"E
117950	2,534,029.3084m	802,571.1397m	N85° 11' 13.27"E
118000	2,534,033.5036m	802,620.9634m	N85° 11' 13.27"E
118050	2,534,037.6988m	802,670.7870m	N85° 11' 13.27"E
118100	2,534,041.8940m	802,720.6107m	N85° 11' 13.27"E
118150	2,534,046.0891m	802,770.4344m	N85° 11' 13.27"E
118200	2,534,050.2843m	802,820.2581m	N85° 11' 13.27"E
118250	2,534,054.4795m	802,870.0818m	N85° 11' 13.27"E
118300	2,534,058.9896m	802,919.8771m	N84° 10' 05.78"E
118350	2,534,064.6911m	802,969.5497m	N82° 44' 09.16"E
118400	2,534,071.6326m	803,019.0642m	N81° 18' 12.54"E
118450	2,534,079.7496m	803,068.4001m	N80° 19' 05.92"E
118500	2,534,088.1583m	803,117.6880m	N80° 19' 05.92"E
118550	2,534,096.5670m	803,166.9758m	N80° 19' 05.92"E
118600	2,534,104.9226m	803,216.2726m	N80° 38' 33.60"E
118650	2,534,112.4075m	803,265.7076m	N82° 10' 55.44"E
118700	2,534,118.5200m	803,315.3310m	N83° 2[illegible]02"E
118750	2,534,123.2519m	803,365.1050m	N85° 21' 29.79"E
118800	2,534,126.6001m	803,414.9911m	N86° 56' 20.88"E
118850	2,534,128.9700m	803,464.9348m	N87° 22' 54.26"E
118900	2,534,131.2541m	803,514.8826m	N87° 22' 54.26"E

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey(v3.0-WDOSC1499(Win PROXKey)
Date: 29-Aug-2024 20:06:49

118950	2,534,133.5381m	803,564.8304m	N87° 22' 54.26"E
119000	2,534,136.2024m	803,614.7584m	N86° 15' 49.59"E
119050	2,534,140.0839m	803,664.6062m	N84° 49' 52.97"E
119100	2,534,144.6521m	803,714.3970m	N84° 45' 21.25"E
119150	2,534,149.2220m	803,764.1878m	N84° 45' 21.25"E
119200	2,534,153.7920m	803,813.9785m	N84° 45' 21.25"E
119250	2,534,158.3619m	803,863.7692m	N84° 45' 21.25"E
119300	2,534,162.9459m	803,913.5586m	N84° 41' 35.06"E
119350	2,534,167.5705m	803,963.3443m	N84° 41' 35.06"E
119400	2,534,172.1950m	804,013.1300m	N84° 41' 35.06"E
119450	2,534,176.8196m	804,062.9156m	N84° 41' 35.06"E
119500	2,534,181.4441m	804,112.7013m	N84° 41' 35.06"E
119550	2,534,186.0687m	804,162.4870m	N84° 41' 35.06"E
119600	2,534,190.6938m	804,212.2726m	N84° 40' 01.17"E
119650	2,534,195.5898m	804,262.0321m	N84° 05' 38.52"E
119700	2,534,200.9832m	804,311.7402m	N83° 31' 15.87"E
119750	2,534,206.8734m	804,361.3918m	N82° 56' 53.23"E
119800	2,534,213.2598m	804,410.9821m	N82° 22' 30.58"E
119850	2,534,219.9975m	804,460.5260m	N82° 14' 22.20"E
119900	2,534,226.7492m	804,510.0681m	N82° 14' 22.20"E
119950	2,534,233.2792m	804,559.6396m	N82° 46' 52.53"E
120000	2,534,239.3140m	804,609.2739m	N83° 21' 15.18"E
120050	2,534,244.8521m	804,658.9660m	N83° 55' 37.82"E
120100	2,534,249.8931m	804,708.7110m	N84° 30' 00.47"E
120150	2,534,254.4363m	804,758.5040m	N85° 04' 23.12"E
120200	2,534,258.4814m	804,808.3399m	N85° 38' 45.77"E
120250	2,534,262.0280m	804,858.2137m	N86° 13' 08.42"E
120300	2,534,265.0756m	804,908.1206m	N86° 47' 31.07"E
120350	2,534,267.6240m	804,958.0554m	N87° 21' 53.71"E
120400	2,534,269.7032m	805,008.0120m	N87° 44' 19.21"E
120450	2,534,271.6808m	805,057.9729m	N87° 36' 49.87"E
120500	2,534,274.3867m	805,107.8983m	N86° 10' 53.25"E
120550	2,534,278.3398m	805,157.7405m	N84° 44' 56.63"E
120600	2,534,283.5375m	805,207.4683m	N83° 19' 00.01"E
120650	2,534,289.8269m	805,257.0707m	N82° 35' 19.42"E
120700	2,534,296.2765m	805,306.6530m	N82° 35' 19.42"E
120750	2,534,302.4155m	805,356.2738m	N83° 36' 07.63"E
120800	2,534,307.4850m	805,406.0156m	N84° 24' 24.78"E
120850	2,534,312.3581m	805,455.7776m	N84° 24' 24.78"E
120900	2,534,317.2313m	805,505.5395m	N84° 24' 24.78"E
120950	2,534,322.1045m	805,555.3015m	N84° 24' 24.78"E
121000	2,534,326.9776m	805,605.0634m	N84° 24' 24.78"E
121050	2,534,331.8508m	805,654.8254m	N84° 24' 24.78"E
121100	2,534,336.7240m	805,704.5873m	N84° 24' 24.78"E
121150	2,534,341.5971m	805,754.3493m	N84° 24' 24.78"E
121200	2,534,346.4703m	805,804.1113m	N84° 24' 24.78"E
121250	2,534,351.3435m	805,853.8732m	N84° 24' 24.78"E
121300	2,534,356.2166m	805,903.6352m	N84° 24' 24.78"E
121350	2,534,361.0898m	805,953.3971m	N84° 24' 24.78"E
121400	2,534,365.9630m	806,003.1591m	N84° 24' 24.78"E
121450	2,534,370.8361m	806,052.9210m	N84° 24' 24.78"E
121500	2,534,375.7093m	806,102.6830m	N84° 24' 24.78"E

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey v3.0-WD0581496(WD1PROXKey)
Date: 29-Aug-2024 20:06:49

121550	2,534,380.5825m	806,152.4450m	N84° 24' 24.78"E
121600	2,534,385.4556m	806,202.2069m	N84° 24' 24.78"E
121650	2,534,390.3288m	806,251.9689m	N84° 24' 24.78"E
121700	2,534,395.2020m	806,301.7308m	N84° 24' 24.78"E
121750	2,534,400.0751m	806,351.4928m	N84° 24' 24.78"E
121800	2,534,404.9483m	806,401.2547m	N84° 24' 24.78"E
121850	2,534,409.8215m	806,451.0167m	N84° 24' 24.78"E
121900	2,534,414.6946m	806,500.7786m	N84° 24' 24.78"E
121950	2,534,419.6320m	806,550.5342m	N84° 15' 47.82"E
122000	2,534,424.6298m	806,600.2838m	N84° 15' 47.82"E
122050	2,534,429.6277m	806,650.0334m	N84° 15' 47.82"E
122100	2,534,434.6256m	806,699.7830m	N84° 15' 47.82"E
122150	2,534,439.6235m	806,749.5326m	N84° 15' 47.82"E
122200	2,534,444.6213m	806,799.2822m	N84° 15' 47.82"E
122250	2,534,449.6171m	806,849.0320m	N84° 20' 43.19"E
122300	2,534,453.9213m	806,898.8451m	N85° 46' 39.82"E
122350	2,534,457.4942m	806,948.7172m	N85° 54' 29.78"E
122400	2,534,461.0618m	806,998.5898m	N85° 54' 29.78"E
122450	2,534,464.6295m	807,048.4623m	N85° 54' 29.78"E
122500	2,534,468.1972m	807,098.3349m	N85° 54' 29.78"E
122550	2,534,472.3581m	807,148.1602m	N84° 30' 38.05"E
122600	2,534,477.1747m	807,197.9276m	N84° 28' 17.08"E
122650	2,534,481.9918m	807,247.6950m	N84° 28' 17.08"E
122700	2,534,486.8090m	807,297.4624m	N84° 28' 17.08"E
122750	2,534,491.6318m	807,347.2293m	N84° 23' 13.84"E
122800	2,534,497.2863m	807,396.9051m	N82° 06' 21.39"E
122850	2,534,506.2506m	807,446.0761m	N76° 42' 38.90"E
122900	2,534,520.7456m	807,493.8949m	N69° 33' 21.26"E
122950	2,534,541.0892m	807,539.5336m	N62° 23' 38.16"E
123000	2,534,566.9639m	807,582.2799m	N55° 14' 24.86"E
123050	2,534,597.5346m	807,621.8221m	N49° 51' 44.14"E
123100	2,534,630.6826m	807,659.2504m	N47° 35' 53.46"E
123150	2,534,664.4466m	807,696.1284m	N47° 31' 04.42"E
123200	2,534,698.2146m	807,733.0028m	N47° 31' 04.42"E
123250	2,534,731.9826m	807,769.8772m	N47° 31' 04.42"E
123300	2,534,765.7506m	807,806.7516m	N47° 31' 04.42"E
123350	2,534,799.5186m	807,843.6260m	N47° 31' 04.42"E
123400	2,534,833.0481m	807,880.7163m	N48° 25' 43.06"E
123450	2,534,866.2257m	807,918.1228m	N48° 25' 43.06"E
123500	2,534,899.4033m	807,955.5293m	N48° 25' 43.06"E
123550	2,534,932.5810m	807,992.9358m	N48° 25' 43.06"E
123600	2,534,965.7586m	808,030.3423m	N48° 25' 43.06"E
123650	2,534,998.9362m	808,067.7488m	N48° 25' 43.06"E
123700	2,535,032.1138m	808,105.1553m	N48° 25' 43.06"E
123750	2,535,065.2915m	808,142.5617m	N48° 25' 43.06"E
123800	2,535,098.4691m	808,179.9682m	N48° 25' 43.06"E
123850	2,535,131.5079m	808,217.4968m	N49° 12' 45.93"E
123900	2,535,163.4563m	808,255.9551m	N51° 06' 21"E
123950	2,535,194.7284m	808,294.9686m	N51° 10' 28.78"E
124000	2,535,226.6282m	808,333.4674m	N49° 17' 48.74"E
124050	2,535,259.6294m	808,371.0290m	N48° 28' 09.20"E
124100	2,535,292.7805m	808,408.4589m	N48° 28' 09.20"E

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS32307130516179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey(v7.30-W(D0549496(WebPROXKey)
Date: 29-Aug-2024 20:06:49

124150	2,535,325.9316m	808,445.8889m	N48° 28' 09.20"E
124200	2,535,358.7439m	808,483.6141m	N50° 01' 05.62"E
124250	2,535,389.4564m	808,523.0521m	N54° 40' 52.05"E
124300	2,535,415.8363m	808,565.4893m	N61° 42' 02.07"E
124350	2,535,436.7307m	808,610.8784m	N68° 51' 45.17"E
124400	2,535,451.8031m	808,658.5184m	N76° 01' 28.27"E
124450	2,535,461.2182m	808,707.6027m	N81° 44' 30.98"E
124500	2,535,467.0476m	808,757.2573m	N84° 20' 51.23"E
124550	2,535,471.8361m	808,807.0274m	N84° 31' 26.93"E
124600	2,535,476.6074m	808,856.7992m	N84° 31' 26.93"E
124650	2,535,481.3787m	808,906.5711m	N84° 31' 26.93"E
124700	2,535,486.2075m	808,956.3373m	N84° 08' 06.58"E
124750	2,535,492.2534m	809,005.9669m	N81° 52' 22.13"E
124800	2,535,500.3510m	809,055.3032m	N79° 29' 07.76"E
124850	2,535,510.4966m	809,104.2594m	N77° 05' 53.39"E
124900	2,535,522.6727m	809,152.7504m	N74° 42' 39.03"E
124950	2,535,536.8580m	809,200.6922m	N72° 19' 24.66"E
125000	2,535,553.0281m	809,248.0015m	N69° 56' 10.29"E
125050	2,535,571.1548m	809,294.5961m	N67° 32' 55.93"E
125100	2,535,591.2066m	809,340.3953m	N65° 09' 41.56"E
125150	2,535,613.1487m	809,385.3194m	N62° 46' 27.19"E
125200	2,535,636.9431m	809,429.2906m	N60° 23' 12.83"E
125250	2,535,662.5485m	809,472.2325m	N57° 59' 58.46"E
125300	2,535,689.9204m	809,514.0705m	N55° 36' 44.09"E
125350	2,535,719.0112m	809,554.7320m	N53° 13' 29.72"E
125400	2,535,749.7706m	809,594.1465m	N50° 50' 15.36"E
125450	2,535,782.1450m	809,632.2455m	N48° 27' 00.99"E
125500	2,535,816.0784m	809,668.9629m	N46° 03' 46.62"E
125550	2,535,851.5117m	809,704.2349m	N43° 40' 32.26"E
125600	2,535,888.3835m	809,738.0004m	N41° 17' 17.89"E
125650	2,535,926.6298m	809,770.2007m	N38° 54' 03.52"E
125700	2,535,966.1843m	809,800.7799m	N36° 30' 49.16"E
125750	2,536,006.9092m	809,829.7844m	N34° 45' 47.50"E
125800	2,536,048.0412m	809,858.2122m	N34° 16' 44.64"E
125850	2,536,089.8906m	809,885.5670m	N31° 59' 04.90"E
125900	2,536,132.8395m	809,911.1606m	N29° 35' 50.53"E
125950	2,536,176.8172m	809,934.9429m	N27° 12' 36.16"E
126000	2,536,221.7474m	809,956.8727m	N24° 49' 21.80"E
126050	2,536,267.5520m	809,976.9120m	N22° 26' 07.43"E
126100	2,536,314.1517m	809,995.0258m	N20° 02' 53.06"E
126150	2,536,361.4654m	810,011.1829m	N17° 39' 38.69"E
126200	2,536,409.3524m	810,025.5593m	N16° 12' 00.72"E
126250	2,536,457.3671m	810,039.5088m	N16° 11' 59.96"E
126300	2,536,505.3818m	810,053.4584m	N16° 11' 59.96"E
126350	2,536,553.3965m	810,067.4079m	N16° 11' 59.96"E
126400	2,536,601.4111m	810,081.3575m	N16° 11' 59.96"E
126450	2,536,649.4258m	810,095.3070m	N16° 11' 59.96"E
126500	2,536,697.4395m	810,109.2602m	N16° 11' 59.50"E
126550	2,536,745.2328m	810,123.9401m	N18° 23' 20.20"E
126600	2,536,791.9918m	810,141.6025m	N25° 23' 20.85"E
126650	2,536,836.8152m	810,163.7108m	N29° 07' 07.33"E
126700	2,536,879.2076m	810,190.1835m	N34° 50' 53.82"E

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey (v3.0-WD0501496(With PROXKey)
Date: 29-Aug-2024 20:06:49

126750	2,536,918.7453m	810,220.7561m	N40° 34' 40.30"E
126800	2,536,955.0532m	810,255.1038m	N46° 04' 04.50"E
126850	2,536,988.6164m	810,292.1568m	N49° 05' 16.08"E
126900	2,537,021.1528m	810,330.1223m	N49° 28' 00.87"E
126950	2,537,053.6471m	810,368.1238m	N49° 28' 00.87"E
127000	2,537,086.1415m	810,406.1253m	N49° 28' 00.87"E
127050	2,537,118.6358m	810,444.1269m	N49° 28' 00.87"E
127100	2,537,151.1302m	810,482.1284m	N49° 28' 00.87"E
127150	2,537,183.6245m	810,520.1300m	N49° 28' 00.87"E
127200	2,537,216.1699m	810,558.0876m	N48° 59' 48.34"E
127250	2,537,249.2836m	810,595.5504m	N48° 24' 12.23"E
127300	2,537,282.4777m	810,632.9423m	N48° 24' 12.23"E
127350	2,537,315.6718m	810,670.3341m	N48° 24' 12.23"E
127400	2,537,348.8659m	810,707.7260m	N48° 24' 12.23"E
127450	2,537,382.0600m	810,745.1179m	N48° 24' 12.23"E
127500	2,537,415.2541m	810,782.5098m	N48° 24' 12.23"E
127550	2,537,448.4482m	810,819.9016m	N48° 24' 12.23"E
127600	2,537,481.6422m	810,857.2935m	N48° 24' 12.23"E
127650	2,537,514.8363m	810,894.6854m	N48° 24' 12.23"E
127700	2,537,547.9951m	810,932.1086m	N48° 39' 08.83"E
127750	2,537,580.9256m	810,969.7327m	N48° 50' 06.06"E
127800	2,537,613.8371m	811,007.3736m	N48° 50' 06.06"E
127850	2,537,646.7486m	811,045.0144m	N48° 50' 06.06"E
127900	2,537,679.6601m	811,082.6553m	N48° 50' 06.06"E
127950	2,537,712.5715m	811,120.2962m	N48° 50' 06.06"E
128000	2,537,745.4830m	811,157.9370m	N48° 50' 06.06"E
128050	2,537,778.3945m	811,195.5779m	N48° 50' 06.06"E
128100	2,537,811.3060m	811,233.2188m	N48° 50' 06.06"E
128150	2,537,844.2174m	811,270.8596m	N48° 50' 06.06"E
128200	2,537,877.1289m	811,308.5005m	N48° 50' 06.06"E
128250	2,537,910.0404m	811,346.1414m	N48° 50' 06.06"E
128300	2,537,942.7513m	811,383.9557m	N49° 46' 05.03"E
128350	2,537,974.5867m	811,422.5096m	N50° 53' 50.96"E
128400	2,538,006.1222m	811,461.3105m	N50° 53' 50.96"E
128450	2,538,037.6577m	811,500.1115m	N50° 53' 50.96"E
128500	2,538,069.3070m	811,538.8191m	N50° 12' 08.54"E
128550	2,538,101.7867m	811,576.8314m	N48° 50' 09.41"E
128600	2,538,134.6976m	811,614.4728m	N48° 50' 09.41"E
128650	2,538,167.6085m	811,652.1142m	N48° 50' 09.41"E
128700	2,538,200.5193m	811,689.7557m	N48° 50' 09.41"E
128750	2,538,233.4302m	811,727.3971m	N48° 50' 09.41"E
128800	2,538,266.3410m	811,765.0385m	N48° 50' 09.41"E
128850	2,538,299.2519m	811,802.6799m	N48° 50' 09.41"E
128900	2,538,332.1628m	811,840.3213m	N48° 50' 09.41"E
128950	2,538,364.9887m	811,878.0366m	N49° 07' 06.25"E
129000	2,538,397.7136m	811,915.8398m	N49° 07' 06.25"E
129050	2,538,430.4385m	811,953.6430m	N49° 07' 06.25"E
129100	2,538,463.1634m	811,991.4462m	N49° 07' 06.25"E
129150	2,538,495.8883m	812,029.2494m	N49° 07' 06.25"E
129200	2,538,528.6132m	812,067.0526m	N49° 07' 06.25"E
129250	2,538,561.3381m	812,104.8558m	N49° 07' 06.25"E
129300	2,538,594.0630m	812,142.6589m	N49° 07' 06.25"E

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051617(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXkey (v3.0-W[illegible]PROXKey)
Date: 29-Aug-2024 20:06:49

129350	2,538,626.7879m	812,180.4621m	N49° 07' 06.25"E
129400	2,538,659.5128m	812,218.2653m	N49° 07' 06.25"E
129450	2,538,692.2582m	812,256.0507m	N48° 59' 05.52"E
129500	2,538,725.1353m	812,293.7216m	N48° 51' 36.51"E
129550	2,538,758.0303m	812,331.3769m	N48° 51' 36.51"E
129600	2,538,790.9252m	812,369.0322m	N48° 51' 36.51"E
129650	2,538,823.8202m	812,406.6875m	N48° 51' 36.51"E
129700	2,538,856.7152m	812,444.3428m	N48° 51' 36.51"E
129750	2,538,889.6101m	812,481.9981m	N48° 51' 36.51"E
129800	2,538,922.5051m	812,519.6534m	N48° 51' 36.51"E
129850	2,538,955.4001m	812,557.3086m	N48° 51' 36.51"E
129900	2,538,988.2950m	812,594.9639m	N48° 51' 36.51"E
129950	2,539,021.1900m	812,632.6192m	N48° 51' 36.51"E
130000	2,539,054.0850m	812,670.2745m	N48° 51' 36.51"E
130050	2,539,086.9799m	812,707.9298m	N48° 51' 36.51"E
130100	2,539,119.9595m	812,745.5107m	N48° 15' 10.08"E
130150	2,539,154.1796m	812,781.9558m	N44° 51' 32.34"E
130200	2,539,191.0491m	812,815.7078m	N40° 06' 13.97"E
130250	2,539,230.2377m	812,846.7513m	N37° 09' 46.25"E
130300	2,539,270.2386m	812,876.7499m	N36° 48' 39.88"E
130350	2,539,310.2694m	812,906.7088m	N36° 48' 39.88"E
130400	2,539,350.3001m	812,936.6678m	N36° 48' 39.88"E
130450	2,539,390.3311m	812,966.6264m	N36° 48' 38.56"E
130500	2,539,430.3621m	812,996.5851m	N36° 48' 38.56"E
130550	2,539,470.3930m	813,026.5438m	N36° 48' 38.56"E
130600	2,539,510.4240m	813,056.5024m	N36° 48' 38.56"E
130650	2,539,550.4550m	813,086.4611m	N36° 48' 38.56"E
130700	2,539,590.4684m	813,116.4431m	N37° 07' 12.66"E
130750	2,539,629.9702m	813,147.0944m	N38° 16' 31.26"E
130800	2,539,669.2224m	813,178.0664m	N38° 16' 31.26"E
130850	2,539,708.4745m	813,209.0385m	N38° 16' 31.26"E
130900	2,539,747.7311m	813,240.0049m	N38° 10' 56.34"E
130950	2,539,787.4444m	813,270.3795m	N36° 19' 48.16"E
131000	2,539,828.2741m	813,299.2359m	N34° 28' 52.65"E
131050	2,539,869.4838m	813,327.5511m	N34° 51' 58.33"E
131100	2,539,909.9578m	813,356.9027m	N37° 05' 26.25"E
131150	2,539,949.5652m	813,387.4187m	N37° 46' 40.40"E
131200	2,539,989.0847m	813,418.0488m	N37° 46' 40.40"E
131250	2,540,028.6043m	813,448.6789m	N37° 46' 40.40"E
131300	2,540,068.1239m	813,479.3090m	N37° 46' 40.40"E
131350	2,540,107.6435m	813,509.9391m	N37° 46' 40.40"E
131400	2,540,147.1630m	813,540.5692m	N37° 46' 40.40"E
131450	2,540,186.6826m	813,571.1993m	N37° 46' 40.40"E
131500	2,540,226.2022m	813,601.8294m	N37° 46' 40.40"E
131550	2,540,265.7218m	813,632.4595m	N37° 46' 40.40"E
131600	2,540,305.2413m	813,663.0896m	N37° 46' 40.40"E
131650	2,540,344.7609m	813,693.7197m	N37° 46' 40.40"E
131700	2,540,384.2805m	813,724.3498m	N37° [illegible] 52"E
131750	2,540,423.5581m	813,755.2878m	N39° 01' [illegible] 52"E
131800	2,540,461.9949m	813,787.2648m	N40° 05' 41.76"E
131850	2,540,500.2438m	813,819.4676m	N40° 05' 41.76"E
131900	2,540,538.6452m	813,851.4874m	N39° 08' 58.06"E

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516178(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXkey (v3.0-WD0501496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

131950	2,540,577.8972m	813,882.4571m	N37° 39' 49.95"E
132000	2,540,617.4917m	813,912.9904m	N37° 38' 10.48"E
132050	2,540,657.0868m	813,943.5227m	N37° 38' 10.48"E
132100	2,540,696.6820m	813,974.0550m	N37° 38' 10.48"E
132150	2,540,736.2772m	814,004.5873m	N37° 38' 10.48"E
132200	2,540,775.8724m	814,035.1196m	N37° 38' 10.48"E
132250	2,540,815.4675m	814,065.6519m	N37° 38' 10.48"E
132300	2,540,855.0627m	814,096.1842m	N37° 38' 10.48"E
132350	2,540,894.6579m	814,126.7165m	N37° 38' 10.48"E
132400	2,540,934.2531m	814,157.2488m	N37° 38' 10.48"E
132450	2,540,973.7058m	814,187.9639m	N38° 36' 17.36"E
132500	2,541,012.0071m	814,220.0964m	N41° 25' 27.79"E
132550	2,541,048.7341m	814,254.0194m	N43° 41' 19.38"E
132600	2,541,084.7944m	814,288.6554m	N43° 52' 00.29"E
132650	2,541,121.0316m	814,323.1052m	N42° 46' 50.90"E
132700	2,541,158.5498m	814,356.1486m	N39° 56' 23.87"E
132750	2,541,197.5668m	814,387.4117m	N37° 52' 04.37"E
132800	2,541,237.0842m	814,418.0447m	N37° 46' 26.20"E
132850	2,541,276.6058m	814,448.6720m	N37° 46' 26.20"E
132900	2,541,316.1275m	814,479.2994m	N37° 46' 26.20"E
132950	2,541,355.6492m	814,509.9268m	N37° 46' 26.20"E
133000	2,541,395.1709m	814,540.5542m	N37° 46' 26.20"E
133050	2,541,434.6926m	814,571.1816m	N37° 46' 26.20"E
133100	2,541,474.2143m	814,601.8090m	N37° 46' 26.20"E
133150	2,541,513.7359m	814,632.4363m	N37° 46' 26.20"E
133200	2,541,553.2576m	814,663.0637m	N37° 46' 26.20"E
133250	2,541,592.7793m	814,693.6911m	N37° 46' 26.20"E
133300	2,541,632.3010m	814,724.3185m	N37° 46' 26.20"E
133350	2,541,671.8227m	814,754.9459m	N37° 46' 26.20"E
133400	2,541,711.3443m	814,785.5733m	N37° 46' 26.20"E
133450	2,541,750.8660m	814,816.2007m	N37° 46' 26.20"E
133500	2,541,790.3877m	814,846.8280m	N37° 46' 26.20"E
133550	2,541,829.9094m	814,877.4554m	N37° 46' 26.20"E
133600	2,541,869.4311m	814,908.0828m	N37° 46' 26.20"E
133650	2,541,908.9528m	814,938.7102m	N37° 46' 26.20"E
133700	2,541,948.4744m	814,969.3376m	N37° 46' 26.20"E
133750	2,541,987.9961m	814,999.9650m	N37° 46' 26.20"E
133800	2,542,027.5178m	815,030.5923m	N37° 46' 26.20"E
133850	2,542,067.0395m	815,061.2197m	N37° 46' 26.20"E
133900	2,542,106.5612m	815,091.8471m	N37° 46' 26.20"E
133950	2,542,146.0828m	815,122.4745m	N37° 46' 26.20"E
134000	2,542,185.6045m	815,153.1019m	N37° 46' 26.20"E
134050	2,542,225.1262m	815,183.7293m	N37° 46' 26.20"E
134100	2,542,264.6479m	815,214.3566m	N37° 46' 26.20"E
134150	2,542,304.1696m	815,244.9840m	N37° 46' 26.20"E
134200	2,542,343.6913m	815,275.6114m	N37° 46' 26.20"E
134250	2,542,383.2129m	815,306.2388m	N37° 46' 26.20"E
134300	2,542,422.7665m	815,336.8249m	N37° 11' 51"E
134350	2,542,463.1461m	815,366.3016m	N34° 20' 03"E
134400	2,542,505.7558m	815,392.4166m	N28° 14' 17.16"E
134450	2,542,551.1804m	815,413.2337m	N21° 02' 24.06"E
134500	2,542,598.8460m	815,428.2251m	N13° 52' 40.96"E

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey v3.0-WD0509496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

134550	2,542,648.0077m	815,437.1640m	N6° 48' 51.16"E
134600	2,542,697.8623m	815,440.7753m	N1° 59' 27.55"E
134650	2,542,747.8544m	815,441.5404m	N0° 16' 53.98"E
134700	2,542,797.8539m	815,441.7830m	N0° 16' 40.56"E
134750	2,542,847.8533m	815,442.0255m	N0° 16' 40.56"E
134800	2,542,897.8527m	815,442.2681m	N0° 16' 40.56"E
134850	2,542,947.8521m	815,442.5106m	N0° 16' 40.56"E
134900	2,542,997.8515m	815,442.7532m	N0° 16' 40.56"E
134950	2,543,047.8509m	815,442.9957m	N0° 16' 40.56"E
135000	2,543,097.8503m	815,443.2382m	N0° 16' 40.56"E
135050	2,543,147.8497m	815,443.4808m	N0° 16' 40.56"E
135100	2,543,197.8492m	815,443.7233m	N0° 16' 40.56"E
135150	2,543,247.8486m	815,443.9659m	N0° 16' 40.56"E
135200	2,543,297.8480m	815,444.2084m	N0° 16' 40.56"E
135250	2,543,347.8474m	815,444.4509m	N0° 16' 40.56"E
135300	2,543,397.8468m	815,444.6935m	N0° 16' 40.56"E
135350	2,543,447.8462m	815,444.9360m	N0° 16' 40.56"E
135400	2,543,497.7858m	815,447.3394m	N2° 53' 28.25"E
135450	2,543,547.7222m	815,449.8613m	N2° 53' 28.25"E
135500	2,543,597.6790m	815,451.6643m	N0° 21' 40.97"E
135550	2,543,647.6780m	815,451.9797m	N0° 21' 40.97"E
135600	2,543,697.6770m	815,452.2950m	N0° 21' 40.97"E
135650	2,543,747.6760m	815,452.6104m	N0° 21' 40.97"E
135700	2,543,797.6750m	815,452.9258m	N0° 21' 40.97"E
135750	2,543,847.6740m	815,453.2411m	N0° 21' 40.97"E
135800	2,543,897.6730m	815,453.5565m	N0° 21' 40.97"E
135850	2,543,947.6720m	815,453.8718m	N0° 21' 40.97"E
135900	2,543,997.6710m	815,454.1872m	N0° 21' 40.97"E
135950	2,544,047.6700m	815,454.5026m	N0° 21' 40.97"E
136000	2,544,097.6690m	815,454.8179m	N0° 21' 40.97"E
136050	2,544,147.6680m	815,455.1333m	N0° 21' 40.97"E
136100	2,544,197.6670m	815,455.4486m	N0° 21' 40.97"E
136150	2,544,247.6660m	815,455.7640m	N0° 21' 40.97"E
136200	2,544,297.6651m	815,456.0794m	N0° 21' 40.97"E
136250	2,544,347.6641m	815,456.3947m	N0° 21' 40.97"E
136300	2,544,397.6631m	815,456.7101m	N0° 21' 40.97"E
136350	2,544,447.6624m	815,456.8621m	N0° 22' 15.63"W
136400	2,544,497.6524m	815,455.9231m	N1° 37' 28.59"W
136450	2,544,547.6323m	815,454.5056m	N1° 37' 28.59"W
136500	2,544,597.6122m	815,453.0880m	N1° 37' 28.59"W
136550	2,544,647.6045m	815,453.1792m	N0° 41' 01.92"E
136600	2,544,697.6009m	815,453.7760m	N0° 41' 01.92"E
136650	2,544,747.5974m	815,454.3728m	N0° 41' 01.92"E
136700	2,544,797.5956m	815,454.7626m	N0° 10' 31.47"E
136750	2,544,847.5954m	815,454.9156m	N0° 10' 31.47"E
136800	2,544,897.5952m	815,455.0687m	N0° 10' 31.47"E
136850	2,544,947.5949m	815,455.2218m	N0° 10' 31.47"E
136900	2,544,997.5947m	815,455.3749m	N0° 10' 31.47"E
136950	2,545,047.5945m	815,455.5279m	N0° 10' 31.47"E
137000	2,545,097.5942m	815,455.6810m	N0° 10' 31.47"E
137050	2,545,147.5907m	815,456.1897m	N1° 15' 21.49"E
137100	2,545,197.5709m	815,457.5915m	N1° 39' 53.64"E

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516178(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey v3.0-WD0561496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

137150	2,545,247.5498m	815,459.0442m	N1° 39' 53.64"E
137200	2,545,297.5287m	815,460.4969m	N1° 39' 53.64"E
137250	2,545,347.4920m	815,462.3721m	N3° 09' 07.53"E
137300	2,545,397.2733m	815,466.8962m	N7° 45' 08.58"E
137350	2,545,446.3199m	815,476.4743m	N14° 06' 22.88"E
137400	2,545,494.3350m	815,490.3927m	N17° 42' 20.65"E
137450	2,545,541.8254m	815,506.0335m	N18° 22' 32.01"E
137500	2,545,589.2781m	815,521.7890m	N18° 16' 41.69"E
137550	2,545,636.9946m	815,536.7150m	N15° 56' 34.16"E
137600	2,545,685.5992m	815,548.3639m	N10° 29' 36.58"E
137650	2,545,735.2009m	815,554.4104m	N3° 35' 13.56"E
137700	2,545,785.1787m	815,555.4146m	N0° 45' 57.39"W
137750	2,545,835.1570m	815,553.9788m	N2° 01' 16.69"W
137800	2,545,885.1259m	815,552.2152m	N2° 01' 16.69"W
137850	2,545,935.0948m	815,550.4517m	N2° 01' 16.69"W
137900	2,545,985.0637m	815,548.6881m	N2° 01' 16.69"W
137950	2,546,035.0325m	815,546.9245m	N2° 01' 16.69"W
138000	2,546,085.0014m	815,545.1610m	N2° 01' 16.69"W
138050	2,546,134.9703m	815,543.3974m	N2° 01' 16.69"W
138100	2,546,184.9392m	815,541.6339m	N2° 01' 16.69"W
138150	2,546,234.9081m	815,539.8703m	N2° 01' 16.69"W
138200	2,546,284.8770m	815,538.1068m	N2° 01' 16.69"W
138250	2,546,334.8459m	815,536.3432m	N2° 01' 16.69"W
138300	2,546,384.8148m	815,534.5797m	N2° 01' 16.69"W
138350	2,546,434.7837m	815,532.8161m	N2° 01' 16.69"W
138400	2,546,484.7525m	815,531.0526m	N2° 01' 16.69"W
138450	2,546,534.7214m	815,529.2890m	N2° 01' 16.69"W
138500	2,546,584.6903m	815,527.5255m	N2° 01' 16.69"W
138550	2,546,634.6592m	815,525.7619m	N2° 01' 16.69"W
138600	2,546,684.6281m	815,523.9984m	N2° 01' 16.69"W
138650	2,546,734.5838m	815,521.9159m	N3° 02' 41.99"W
138700	2,546,784.4778m	815,518.6757m	N4° 06' 57.85"W
138750	2,546,834.3488m	815,515.0868m	N4° 06' 57.85"W
138800	2,546,884.2220m	815,511.5283m	N3° 52' 20.43"W
138850	2,546,934.1525m	815,508.9414m	N2° 02' 29.30"W
138900	2,546,984.1276m	815,507.3640m	N1° 45' 57.84"W
138950	2,547,034.1038m	815,505.8231m	N1° 45' 57.84"W
139000	2,547,084.0801m	815,504.2821m	N1° 45' 57.84"W
139050	2,547,134.0563m	815,502.7412m	N1° 45' 57.84"W
139100	2,547,184.0326m	815,501.2003m	N1° 45' 57.84"W
139150	2,547,234.0088m	815,499.6593m	N1° 45' 57.84"W
139200	2,547,283.9851m	815,498.1184m	N1° 45' 57.84"W
139250	2,547,333.9613m	815,496.5774m	N1° 45' 57.84"W
139300	2,547,383.9376m	815,495.0365m	N1° 45' 57.84"W
139350	2,547,433.9160m	815,493.5732m	N1° 18' 37.08"W
139400	2,547,483.9128m	815,493.2938m	N0° 29' 56.16"E
139450	2,547,533.9099m	815,493.8345m	N0° 38' 02.44"E
139500	2,547,583.9072m	815,494.3501m	N0° 7[illegible]2"E
139550	2,547,633.9021m	815,493.8459m	N1° 30' 2[illegible]2"W
139600	2,547,683.8799m	815,492.3589m	N1° 44' 25.10"W
139650	2,547,733.8569m	815,490.8405m	N1° 44' 25.10"W
139700	2,547,783.8338m	815,489.3220m	N1° 44' 25.10"W

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey v2.3.0-WDOS01498(WD PROXKey)
Date: 29-Aug-2024 20:06:49

139750	2,547,833.8107m	815,487.8035m	N1° 44' 25.10"W
139800	2,547,883.7877m	815,486.2850m	N1° 44' 25.10"W
139850	2,547,933.7646m	815,484.7666m	N1° 44' 25.10"W
139900	2,547,983.7415m	815,483.2481m	N1° 44' 25.10"W
139950	2,548,033.7185m	815,481.7296m	N1° 44' 25.10"W
140000	2,548,083.6954m	815,480.2112m	N1° 44' 25.10"W
140050	2,548,133.6759m	815,478.8259m	N1° 03' 32.04"W
140100	2,548,183.6663m	815,479.2249m	N2° 28' 34.01"E
140150	2,548,233.4345m	815,483.8143m	N8° 07' 38.95"E
140200	2,548,282.4967m	815,493.3441m	N13° 51' 25.43"E
140250	2,548,330.3624m	815,507.7244m	N19° 35' 11.91"E
140300	2,548,376.5534m	815,526.8115m	N25° 18' 58.39"E
140350	2,548,420.6080m	815,550.4146m	N31° 02' 44.87"E
140400	2,548,462.0862m	815,578.2979m	N36° 46' 31.35"E
140450	2,548,500.5734m	815,610.1828m	N42° 30' 17.83"E
140500	2,548,535.6853m	815,645.7507m	N48° 14' 04.31"E
140550	2,548,567.1066m	815,684.6195m	N53° 38' 05.52"E
140600	2,548,595.5731m	815,725.7187m	N56° 26' 51.03"E
140650	2,548,623.0321m	815,767.5039m	N56° 43' 47.35"E
140700	2,548,650.4615m	815,809.3085m	N56° 43' 47.35"E
140750	2,548,677.8909m	815,851.1132m	N56° 43' 47.35"E
140800	2,548,705.3203m	815,892.9178m	N56° 43' 47.35"E
140850	2,548,732.7497m	815,934.7225m	N56° 43' 47.35"E
140900	2,548,760.1791m	815,976.5271m	N56° 43' 47.35"E
140950	2,548,787.6085m	816,018.3318m	N56° 43' 47.35"E
141000	2,548,815.0379m	816,060.1364m	N56° 43' 47.35"E
141050	2,548,842.4774m	816,101.9344m	N56° 35' 31.75"E
141100	2,548,870.6991m	816,143.2037m	N54° 10' 23.43"E
141150	2,548,901.6497m	816,182.4502m	N48° 58' 56.96"E
141200	2,548,936.2942m	816,218.4734m	N43° 15' 10.48"E
141250	2,548,974.3620m	816,250.8580m	N37° 31' 24.00"E
141300	2,549,015.4727m	816,279.2804m	N31° 47' 37.52"E
141350	2,549,059.1438m	816,303.5952m	N26° 49' 16.71"E
141400	2,549,104.2602m	816,325.1413m	N24° 44' 11.12"E
141450	2,549,149.6911m	816,346.0225m	N24° 40' 52.32"E
141500	2,549,195.1234m	816,366.9009m	N24° 40' 52.32"E
141550	2,549,240.5557m	816,387.7794m	N24° 40' 52.32"E
141600	2,549,285.9879m	816,408.6578m	N24° 40' 52.32"E
141650	2,549,331.4202m	816,429.5363m	N24° 40' 52.32"E
141700	2,549,376.8525m	816,450.4147m	N24° 40' 52.32"E
141750	2,549,422.2847m	816,471.2932m	N24° 40' 52.32"E
141800	2,549,467.7170m	816,492.1716m	N24° 40' 52.32"E
141850	2,549,513.1492m	816,513.0501m	N24° 40' 52.32"E
141900	2,549,558.5815m	816,533.9285m	N24° 40' 52.32"E
141950	2,549,604.0138m	816,554.8070m	N24° 40' 52.32"E
142000	2,549,649.4460m	816,575.6854m	N24° 40' 52.32"E
142050	2,549,694.8783m	816,596.5639m	N24° 40' 52.32"E
142100	2,549,740.3106m	816,617.4423m	N24° 40' 52.32"E
142150	2,549,785.7428m	816,638.3208m	N24° 40' 52.32"E
142200	2,549,831.1751m	816,659.1992m	N24° 40' 52.32"E
142250	2,549,876.7961m	816,679.6579m	N23° 07' 46.56"E
142300	2,549,923.3332m	816,697.9222m	N19° 53' 31.89"E

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051617 9(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey (v3.0-WD0501149(MS PROXKey)
Date: 29-Aug-2024 20:06:49

142350	2,549,970.5356m	816,714.4110m	N19° 02' 27.78"E
142356.571	2,549,976.7468m	816,716.5546m	N19° 02' 27.78"E

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051 6179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey IV 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Annex – IV
(Schedule-A)

Environment Clearances - Not applicable

Forest/Wildlife clearance - Not applicable

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey IV 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Appendix A-I

Index Map of Project Highway

Shahganj bypass end to Badi Package-IV
Existing Ch. 111+250 to 150+712
Design Ch. 102+000 to 142+357

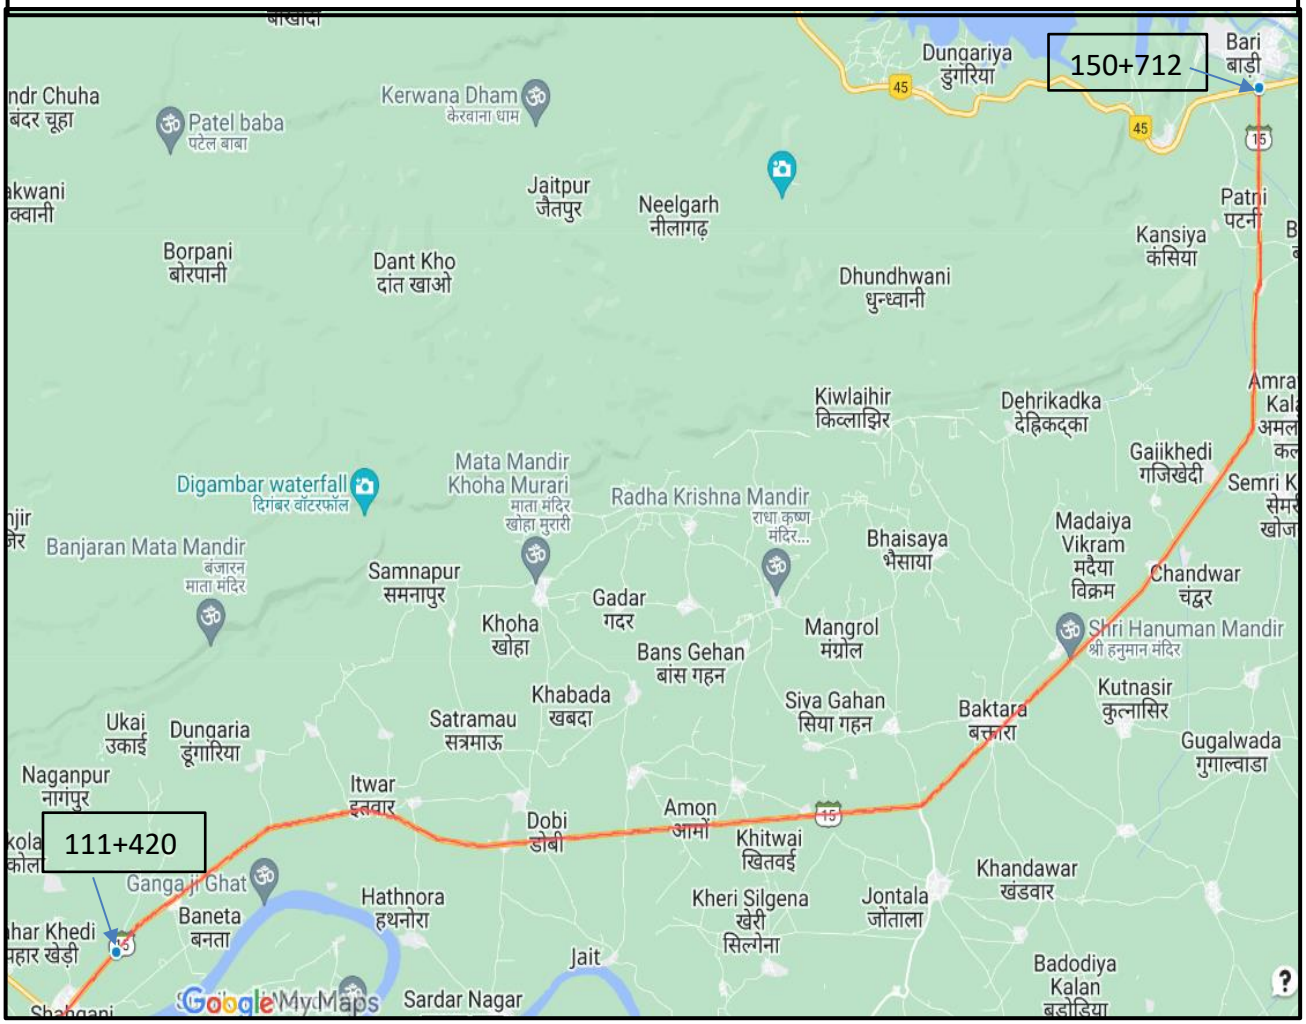

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Appendix A-II

Existing Carriageway Width

Sr. No.	Existing Chainage		Length in km	Type of Carriageway	Width of Carriageway (m)	Width of Paved Shoulders (m)		Width of earthen shoulder (m)	
						LHS	RHS	LHS	RHS
1	111+250	121+590	10.34	Flexible	7	-	-	1.5	1.5
2	121+590	122+180	0.59	Rigid	7+1.2+7	1.5	1.5	-	-
3	122+180	124+800	2.62	Flexible	7	-	-	1.5	1.5
4	124+800	125+010	0.21	Rigid	7+1.2+7	1.5	1.5	-	-
5	125+010	133+840	8.83	Flexible	7	-	-	1.5	1.5
6	133+840	135+350	1.51	Rigid	7+1.2+7	1.5	1.5	-	-
7	135+350	150+712	15.362	Flexible	7	-	-	1.5	1.5
	Total		39.462						

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Appendix A-III

a. Public Health Utilities (Water/Sewage pipe Lines)

Sl No	Chainage		Length (in Km)				Crossing				Remark
	From	To	Water Supply		Sewage line		Water Supply		Sewage line		
			With pumping	With gravity	With pumping	With gravity	With pumping	With gravity	With pumping	With gravity	
1.	103+200	104+400	1.20								
2.	107+600	108+800	1.20								
3.	109.950	111.00	1.050								
4.	112+100	113+200	1.10								
5.	114+450	114+600	0.150								
6.	115+015						1				
7.	115+200	116+200	1.00								
8.	118+250	119+250	1.00				1				
9.	119+800	120+700	0.90								

a) Extra High-Tension lines (EHT Lines)										
S. No	Design Chainage		Length (in Km)				Crossings			
	From	To	400 KV	22 KV	110 KV	66 KV	766 KV	220 KV	132 KV	66 KV
Nil										

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

b) High Tension/ Low Tension lines (HT/LT Lines)

Sl. No.	Chainage (km)		Length (in Km)			Crossings			Transformers	
	From	To	33KV	11KV	LT	33KV	11KV	LT	No	Capacity
1	102.000	105.400	3.400			6	5		6	25KVA
2	102.000	110.900		8.900					2	100KVA
3	102.000	112.300		10.300		8	5	4	1	500KVA
4	103.700	103.900			0.400					
5	104.000	104.200			0.400					
6	105.400	106.950	1.550							
7	105.400	106.950	1.550							
8	106.950	111.950	5.000						7	25KVA
9	106.950	111.950	5.000						2	100KVA
10	106.950	111.950	5.000							
11	106.950	111.950	5.000							
12	110.500	111.700			1.200					
13	111.050	111.530		0.480						
14	111.530	111.600		0.070						
15	111.950	112.900	0.950							
16	111.950	112.900	0.950							
17	112.300	122.900		10.600		10	5	10	4	25KVA
18	112.300	112.510			0.210				2	63KVA
19	112.480	112.510			0.030					
20	112.700	112.800			0.100					
21	112.900	113.600	0.700							
22	112.900	117.550	4.650						5	100KVA
23	112.900	117.550	4.650							
24	114.560	115.120		0.560					6	25KVA
25	117.400	119.650		2.250		4		13	5	100KVA
26	117.400	119.650		2.250						
27	117.400	119.650		2.250						
28	117.550	123.180	5.630			10	3	2		
29	117.550	124.240	6.690						2	25KVA
30	119.000	119.100			0.100					
31	119.700	119.850			0.150					
32	120.000	120.100			0.100				1	63KVA
33	120.000	120.300			0.600					
34	120.150	120.300			0.150				1	100KVA
35	126.600	127.780	1.180							
36	126.600	127.700		1.100						
37	127.700	127.880		0.180						
38	127.700	135.200		7.500		8	1	2	7	25KVA
39	129.690	129.980		0.290					1	63KVA
40	130.820	130.850			0.030					
41	131.400	131.450			0.050					
42	131.700	131.750			0.050					
43	132.100	135.200	3.100			6	4	2	5	25KVA
44	135.700	137.350	1.650							
45	136.100	139.900		3.800						
46	137.350	139.900	2.550			8	3	5	5	25KVA
47	137.350	139.900	2.550							63KVA
48	137.350	139.900		2.550						
49	137.450	137.600			0.150					
50	139.500	139.900		0.400						

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep)

Signature Not Verified
Digitally Signed
Name: PROXKey V 3.0-1WD0561048(WD PROXKey)
Date: 29-Aug-2024 20:06:49

b) High Tension/ Low Tension lines (HT/LT Lines)										
Sl. No.	**Chainage (km)**		**Length (in Km)**			**Crossings**			**Transformers**	
	From	**To**	**33KV**	**11KV**	**LT**	**33KV**	**11KV**	**LT**	**No**	**Capacity**
	Total		61.750	53.480	3.720	26	60	38	63	42 Nos 25 KVA, 5 Nos 63KVA, 15 100KVA, 1 no 500 KVA & 1 no. Sub station

b. Any Other Line

Sl No	**Chainage**		**Pipe Crossing**	
	From	**To**	**Underground**	**Overhead**
Nil				

No change of scope shall be paid for any over-ground utilities. However, for any underground utilities not mentioned in Schedule B shall form change of scope, which shall be worked out as per as per the estimation of the corncerned utility owning department and shall be payable.

• • •

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS32307130516179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

SCHEDULE - B

(See Clause 2.1)

DEVELOPMENT OF PROJECT HIGHWAY

1. Development of the Project Highway

Development of the Project Highway shall include detailed design, including plan & profile within available proposed ROW and construction of the Project Highway as described in Schedule-B and Schedule-C. The alignment plans of the Project Highway are given in Annex-III of Schedule A which is minimum requirement and are for guidance only. The proposed plan & profile, locations of different structures/drains/service & slip road/ RE walls, chainages of different structures/drains/service & slip road/RE walls, length of different structures/drains/service & slip road/RE walls etc. of the project highway as indicated in the Schedule A, Schedule B, Schedule C and their Annexures, shall be treated as minimum requirement. Based on site/design requirement, the Concessionaire shall finalize Detailed Project Report (DPR) including plan & profile of the project highway and submit the same to Authority & its Engineer for acceptance, before the start of the execution of project.

Based on accepted DPR including Plan & profile prepared by the Concessionaire, the detailed work program with Network Method (PERT/CPM) shall be prepared along with commensurate deployment of all resources and get approved from Engineer before start of civil work. Any required changes in scope of work given in Schedule B and Schedule C, including any variation in standard, shall be finalized by both the parties before start of actual civil work.

Requirement specifically mentioned in Schedule B & C shall prevail over general requirements given in Manual mentioned in Schedule D.

2. Rehabilitation and Augmentation

Rehabilitation and augmentation shall include Four Lane with Paved shoulders configuration as described in Annexure-I of this Schedule-B and in Schedule-C.

3. Specifications and Standards

The Project Highway shall be designed and constructed in conformity with the Specifications and Standards specified in Annexure-I of Schedule-D

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051616179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Construction work of 4-laning of Shahganj bypass end to Badi (Package-IV) of NH-146B from design km 102.000 to design km 142.357 (Design Length 40.357 km) under NH(O) in the State of Madhya Pradesh on Hybrid Annuity Mode.

Annexure – I

(Schedule – B)

Description of the Project

1. Development of the Project Highway

The Project Highway shall generally follow the horizontal alignment shown in the plan specified in Annexure- III of Schedule-A, unless otherwise specified by the Authority. Notwithstanding anything to the contrary contained in this Agreement or IRC: SP:84/87, the proposed plan & profile, locations of different structures/drains/service & slip road/RE walls, chainages of different structures/drains/service & slip road/RE walls, length of different structures/drains/service & slip road/RE walls etc. of the project highway as indicated in the Schedule A, Schedule B, Schedule C and their Annexures shall be treated as minimum requirement. Based on site/design requirement, the Concessionaire shall finalize their Detailed Designs (Development Stage) including plan & profile of the project highway and submit the same to Authority & its Engineer for its Consent/Approval and Safety Audit by Safety Auditor, before the start of the execution of project. The designs so approved shall not be in contradiction with the scope of project. For avoidance of doubt, the provisions mentioned in schedule B & C cannot be changed, only the design of the components is to be submitted for consent/approval.

1.1. Width of Carriageway

1.1.1. Four-Laning with paved shoulders shall be undertaken. The paved carriageway shall be 18.2 meter for four laning (including paved shoulder and Kerb shyness/edge strip). The earthen shoulder shall be 2 meters on either side and Edge strip shall be minimum 0.6m.

S. No.	Type of TCS	MCW Width (m)	Service Road Width (m)
1	TCS-1	0.6 (**Edge Strip**)+7.0 (MCW)+1.5 (PS)+2.0 (ES)=11.1X2=22.2	Nil
2	TCS-2	0.6 (**Edge Strip**)+7.0 (MCW)+1.5 (PS)+2.0 (ES)=11.1X2=22.2	Nil
3	TCS-3	0.6 (**Edge Strip**)+7.0 (MCW)+1.5 (PS)+2.0 (ES)=11.1X2=22.2	Nil
4	TCS-4	0.5 (KS)+7.0 (MCW)+1.5 (PS)+0.5 (KS)+0.5 (CB)=10X2=20.0	0.25 (KS)+7.0(SR)=7.5X2=15.0
5	TCS-5	0.6 (**Edge Strip**)+7.0 (MCW)+1.5 (PS)+2.0 (ES)=11.1X2=22.2	Nil
6	TCS-6	0.5 (KS)+7.0 (MCW)+1.5 (PS)+0.5 (KS)+0.5 (CB)x2=10.5+0.5 (KS)+7.0 (MCW)+1.5 (PS)=9.0 (10.5+9.0=19.5)	0.25 (KS)+7.0(SR)=7.5+0.25 (KS)+5.5(SR)=6.0 (7.5+6.0=13.5)
7	TCS-7	0.5 (KS)+7.0 (MCW)+1.5 (PS)+2.0 (ES)=11.0X2=22.0	Nil
8	TCS-8	0.5 (KS)+7.0 (MCW)+1.5 (PS)+2.0 (ES)=11.0X2=22.0	Nil

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V3.0-WD05611496(W.D. PROXKey)
Date: 29-Aug-2024 20:06:49

Note: MCW=Main Carriageway, PS=Paved Shoulder, ES= Earthen Shoulder, KS = Kerb Shyness, SR = Slip Road

1.1.2. In built-up sections/areas the width of paved carriageway shall be 20.0 meter for four laning (including paved shoulder and Kerb shyness/edge strip).

1.1.3. Except as otherwise provided in this Agreement, the width shall be adjusted to fit into appropriate plans and cross sections developed in accordance with TCS enclosed.

1.1.4. The entire cross-sectional elements shall be accommodated in the available/proposed ROW. If required, suitable retaining structures shall be provided to accommodate the highway cross section within the available/ proposed ROW. The details of such sections are mentioned in Schedule-B. In case of any other section not included in Schedule-B, where retaining structures are to be provided, shall constitute a Change of Scope.

1.2. Width of Median

1.2.1. The width of median including Kerb shyness shall be 9 meters for depressed median and 5 meters for flush median.

1.2.2. In case of depressed median, a minimum of 0.6-meter width adjacent to carriageway in either direction shall be paved. In case of depressed / flushed median, the metal beam (thrie beam) crash barrier shall be provided on either side of the median. In case width of median is equal or more than 9 meters, no crash barrier is required to be provided in the median side.

1.2.3. A suitable paving (paver blocks, etc.) shall be proposed in case of flush median to prevent spreading of soil on carriageway.

1.2.4. A suitable anti-glare measures shall be proposed.

2. Geometric Design and General Features

2.1. General: Geometric design and general features of the Project Highway shall be in accordance with Section 2 of the manual. Intermediate Sight distance (Desirable Minimum Sight Distance) shall be followed for design of all vertical curves including structures as well as highways.

2.2. Design Speed: The project road shall be designed for 100 Kmph for plain and rolling terrain.

2.3. Improvement of the existing road geometrics

2.3.1. The existing road geometrics shall be improved as per the codal provisions. In the sections, where improvement of the existing road geometrics to the prescribed standards is not possible, the existing road geometrics shall be improved to the extent possible within the given right of way and appropriate road signs, pavement markings and safety measures shall be provided.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep)

Sr. No.	Stretch (Design Chainage) Km		Type of deficiency	Remarks
	From	To		
1.	Nil.			

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

2.3.2. The entire cross-sectional elements shall be accommodated in the available/proposed ROW. If required, suitable full height retaining structures shall be provided to accommodate

the highway cross section within the available/ proposed ROW. The details of such sections are mentioned in Schedule-B. In case of any other section not included in Schedule-B. where retaining structures are to be provided, shall constitute a Change of Scope.

2.3.3. Realignments: The existing road shall be improved to the standards as specified in the manual at the following locations:

Sr. No.	Existing Chainage (Km)		Length (Km)	Design Chainage (Km)		Length (Km)
	From	To		From	To	
1.	Nil					

2.3.4. Bypasses: The existing road shall be bypassed to the standards as specified in the manual at the following locations:

Sr. No.	Name of bypass	Existing Chainage (Km)		Design Chainage (Km)		Length (Km)
		From	To	From	To	
1	Baktra	133.500	135.750	124.250	126.750	2.500
2	Badi	149.100	150.712	140.050	142.357	2.307

2.4. Right of Way

Details of the Right of Way along Project Highways and Side Roads are given in Annexure-II of Schedule-A.

2.5. Type of shoulders

2.5.1 The Design Specification of paved shoulder shall conform to the requirements specified in paragraph 5.10 of the manual.

2.5.2 Paved shoulders and strip on median side shall be of same specification and pavement composition as of main carriageway.

2.5.3 The overlay on the main carriageway pavement and on the paved shoulders shall be uniform in thickness and composition.

2.5.4 In Built-up sections, footpaths/fully paved shoulder shall be provided with width 1.5m/1.5m respectively.

2.5.5 In open country, paved shoulders of 1.5m width shall be provided as given in TCS.

2.5.6 The Design Specification of Earthen shoulder shall conform to the requirements specified in paragraph 5.11 of the manual.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-vid:501149360(Mr.PRADEEP
Date: 29-Aug-2024 20:06:49

2.5.7 The earthen shoulder of 2.0m width on shoulder side shall be provided with top 150 mm on earthen shoulder with well graded naturals and morrum gravel crust stones or combination thereof, confirming to Clause 401 of MoRTH specification.

2.5.8 The earthen shoulder of 1.0m width on median side shall be provided with top 150 mm on earthen shoulder with well graded naturals and morrum gravel crust stones or combination

thereof, confirming to Clause 401 of MoRTH specification to fix MBCB and confirm placement requirement of MBCB.

2.6. Lateral and Vertical Clearance at Underpasses

2.6.1. In case of VUP/ LVUP/ SVUP, the proposed structure, the finish road level in VUP/ LVUP/ SVUP shall be kept 150 mm above the ground level/service road/ cross road (whichever is higher) to ensure that these VUP/ LVUP/ SVUP don't become water accumulation points.

2.6.2. The vertical and horizontal clearance at the underpasses shall be as per Clause 2.10.2 of the manual.

2.7. Lateral and vertical clearances at Overpasses

2.7.1. Lateral and vertical clearances for overpasses shall be as per paragraph 2.11 of the Manual.

2.7.2. Lateral clearance: The width of the opening at the Overpasses shall be as follows:

Sr. No.	Location Chainage (Km)	Span/opening (m)	Remarks
Nil			

(MCW – main carriageway**, LHS –** Left Hand Side and **RHS –** Right Hand Side**)**

2.8. Service roads/Slip roads/Connecting Roads:

2.8.1. Service Road: The height of embankment of service road shall confirm to clause 4.2.1.

2.8.2. The Service roads shall be constructed at the locations and for the lengths indicated below:

Sr. No.	Design Chainage (Km)		Length (km)		Paved Carriageway Width including shyness (m)	Total	Remarks
	From	To	LHS	RHS			
Nil							

2.8.3. The Parking bays shall be provided along service road.

Sr. No.	Design Chainage of Parking Bay		Remarks
	LHS Service Road	RHS Service Road	
Nil			

2.8.4. Slip Road: The height of embankment of slip road shall confirm to clause 4.2.1.

2.8.5. The Slip roads shall be constructed at the locations and for the lengths indicated below:

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2014 20:06:49

Sr. No.	Design Chainage (Km)		Length (km)		Paved Carriageway Width including shyness (m)	Total	Remarks
	LHS	RHS	LHS	RHS			
1	103.640	104.390	0.750	0.750	7.5	1.500	Both-Direction
2	104.900	105.740	0.840	0.840	7.5	1.680	Both-Direction
3	106.460	107.300	0.840	0.840	6.0+7.5	1.680	Uni-Directional Structure is Proposed
4	108.480	109.180	0.700	0.700	7.5	1.400	Both-Direction
5	110.020	110.880	0.860	0.860	7.5	1.720	Both-Direction
6	112.220	114.080	1.860	1.860	7.5	3.720	Both-Direction
7	115.280	116.120	0.840	0.840	7.5	1.680	Both-Direction
8	118.260	119.180	0.920	0.920	7.5	1.840	Both-Direction
9	119.900	120.650	0.750	0.750	7.5	1.500	Both-Direction
10	122.470	123.410	0.940	0.940	7.5	1.880	Both-Direction
11	123.910	124.860	0.950	0.950	6.0+7.5	1.900	Uni-Directional Structure is Proposed
12	124.860	126.060	1.200	1.200	7.5	2.400	Both-Direction
13	126.060	127.010	0.950	0.950	6.0+7.5	1.900	Uni-Directional Structure is Proposed
14	127.470	128.410	0.940	0.940	7.5	1.880	Both-Direction
15	131.010	131.740	0.730	0.730	7.5	1.460	Both-Direction
16	135.315	136.430	1.115	1.115	7.5	2.230	Both-Direction
17	137.070	138.730	1.660	1.660	7.5	3.320	Both-Direction
18	139.620	140.690	1.070	1.070	7.5	2.140	Both-Direction
		Total	**17.915**	**17.915**		**35.830**	

2.8.6. Separator Between Main Carriageway and Service/Slip Road

A separator between main carriageway and service/slip road shall be provided to prevent the pedestrians, local vehicles and animals entering the highway.

Note:

i. Above length of the service/slip roads is minimum specified. The actual length of the service/slip/connecting roads shall be determined by the Concessionaire in accordance with the approved plan & profile and design approved from the Independent Engineer. Any increase/decrease up to 5 percent length from the length specified in this Clause of Schedule-B shall not constitute a Change of Scope.

ii. The Acceleration, deceleration lane, right turning storage lane, entry/exit lanes shall be constructed in addition to length given in above table and shall be deemed to be part of the scope and no Change of Scope shall be considered for the same.

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed,
Name: PROXKey (v 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

2.9. Grade Separated Structures: Grade separated structures shall be constructed as per paragraph 2.13 of the Manual. Proposed levels at structure locations as shown in plan & profile specified in Annexure-III of schedule A are minimum requirement and only for guidance and any increase in levels shall not constitute any change of scope. Entry/Exit arrangement from

main carriageway shall be 50m before/after the start/end of approach road to grade separator i.e. start/end of valley curve. RCC barrier shall start from start of valley curve and end after grade separator at end of valley curve.

The sub-structure shall be continued in the median portion with RCC barrier wherever superstructure has not been proposed in median portion.

50m long MBCB Safety barriers on structure approaches shall be provided on all four faces of each structure. MBCB provided towards median side of each structure shall be joined on ends in semi-circular shape.

1.5m wide footpaths shall be provided at grade intersection below structures for each direction of pedestrian movement.

The requisite particulars are given below:

2.9.1. Vehicle Overpass (VOP)

Sr. No.	Design Chainage (Km)	LHS Roadway Width (m)	RHS Roadway Width (m)	Super Structure Provision in Median	Span Arrangement (m)	Minimum Vertical Clearance (m)	Skew Angle (to be specified)	Remarks
Nil								

2.9.2. Vehicle Underpasses (VUP)

Sr. No.	Design Chainage (Km)	LHS Roadway Width (m)	RHS Roadway Width (m)	Super Structure Provision in Median	Overall Span Arrangement (m)	Minimum Vertical Clearance (m)	Skew Angle (to be specified)	Remarks
1	106+885	10.5	-	-	1X15	5.50	0	Uni-Direction
2	108+850	10.5	10.5	Open to Sky	1X15	5.50	0	Both-Direction
3	110+480	10.5	10.5	Open to Sky	1X15	5.50	30	Both-Direction
4	112+710	10.5	10.5	Open to Sky	15+30+15	5.50	9	Both-Direction
5	113+575	10.5	10.5	Open to Sky	1x15	5.50	30	Both-Direction
6	118+690	10.5	10.5	Open to Sky	1X15	5.50	23	Both-Direction
7	122+890	10.5	10.5	Open to Sky	1X15	5.50	10	Both-Direction
8	124+400	10.5	-	-	15+30+15	5.50	0	Uni-Direction
9	125+610	10.5	10.5	Open to Sky	15+30+15	5.50	0	Both-Direction
10	126+540	10.5	-	-	15+30+15	5.50	0	Uni-Direction

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey V 3.0 WD0561496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Sr. No.	Design Chainage (Km)	LHS Roadway Width (m)	RHS Roadway Width (m)	Super Structure Provision in Median	Overall Span Arrangement (m)	Minimum Vertical Clearance (m)	Skew Angle (to be specified)	Remarks
11	127+940	10.5	10.5	Open to Sky	1x15	5.50	35	Both-Direction
12	135+950	10.5	10.5	Open to Sky	2X15	5.50	0	Both-Direction
13	138+360	10.5	10.5	Open to Sky	1X15	5.50	10	Both-Direction
14	139+930	10.5	10.5	Open to Sky	2X15	5.50	4	Both-Direction
15	140+275	10.5	10.5	Open to Sky	1x22.5	5.50	0	Both-Direction

Note: - 1. Minimum 1.5 m Footpath finished with paver blocks shall be provided for pedestrian crossing under VUP.

2.9.3. Light Vehicle Underpasses (LVUP)

Sr. No.	Design Chainage (Km)	LHS Roadway Width (m)	RHS Roadway Width (m)	Super Structure Provision in Median	Clear Span Arrangement (m)	Minimum Vertical Clearance (m)	Skew Angle (to be specified)	Remarks
1	104+000	10.5	10.5	Open to Sky	1x12	4.00	0	Both-Direction
2	105+280	10.5	10.5	Open to Sky	1x12	4.00	10	Both-Direction
3	115+675	10.5	10.5	Open to Sky	1x12	4.00	14	Both-Direction
4	120+275	10.5	10.5	Open to Sky	1x12	4.00	0	Both-Direction
5	131+395	10.5	10.5	Open to Sky	1x12	4.00	0	Both-Direction
6	137+520	10.5	10.5	Open to Sky	1x12	4.00	0	Both-Direction

Note: - 1. Minimum 1.5 m Footpath finished with paver blocks shall be provided for pedestrian crossing under VUP.

2.9.4. Small Vehicle Underpasses (SVUP)

No.	Design Chainage (Km)	LHS Roadway Width (m)	RHS Roadway Width (m)	Super Structure Provision in Median	Span Arrangement (m)	Minimum Vertical Clearance (m)	Skew Angle (to be specified)	Remarks
Nil								

2.9.5. Cattle and Pedestrian underpasses

Signature Not Verified
Digitally Signed by: Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed by: Name: PROXKey v3.0-WIN-611I4Q6AUJ1-PROXKey) Date: 29-Aug-2024 20:06:49

Sr. No.	Design Chainage (Km)	LHS Roadway Width (m)	RHS Roadway Width (m)	Super Structure Provision in Median	Span Arrangement (m)	Minimum Vertical Clearance (m)	Skew Angle (to be specified)	Remarks
Nil								

2.9.6. Flyover / Interchanges (IC)

Sr. No	Design Chainage (km)	Name of structure	Span Arrangement (m)	Total Width (m)	Typical Cross Section	Remarks
Nil						

Note: -

(i) The Grade Separated Structures shall be constructed using such construction material/methods/technologies so as to ensure uninterrupted flow of traffic on crossroads. Diversion of traffic or restriction of paved width of crossroads shall not be constructed. The diversion road shall have paved width not less than the width of the existing crossroad, which shall be designed for a minimum 10 MSA as per IRC: SP:87-2019. The diversion road shall be constructed and maintained in good condition to the satisfaction of Independent Engineer, during the construction of Structures. The cost of the diversion road shall be borne by Concessionaire.

(ii) Special Vehicle loading as per IRC-6 is to be considered for design of all structures.

(iii) In addition to above, in case of structure, damage caused to existing NH (if any) over which structure has been proposed shall be repaired and NH shall be restored to original condition to the satisfaction of the IE/NHAI. There will be no COS in this regard.

2.9.7. Details of Ramps, Cross Roads and Connecting Roads at Interchanges (IC)

Sr. No.	Carriageway Widths including Kerb Shyness	Length (m)	Description of Ramps, Crossroads and Connecting Roads	Remarks
Nil				

2.10. Typical Cross Section (TCS) of the Project Highway

The Project Highway shall be constructed to Four lane configuration. Typical cross sections required to be developed in different sections of the Project Highway are given below.

Sl. No	From	To	Length	TCS Type	Remarks
1	102.000	103.300	1.300	TCS-3	Eccentric - RHS
2	103.300	103.640	0.340	TCS-1	Concentric
3	103.640	104.390	0.750	TCS-4	LVUP
4	104.390	104.900	0.510	TCS-3	Eccentric - RHS
5	104.900	105.740	0.840	TCS-4	LVUP
6	105.740	106.460	0.720	TCS-3	Eccentric - RHS
7	106.460	107.300	0.840	TCS-6	VUP- Uni Direction
8	107.300	108.000	0.700	TCS-3	Eccentric - RHS
9	108.000	108.480	0.480	TCS-1	Concentric
10	108.480	109.180	0.700	TCS-4	VUP

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS32307130516179(Pradeep
Signature Not Verified
Digitally Signed,
Name: PROXKey v 3.0-WD0361496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Sl. No	From	To	Length	TCS Type	Remarks
11	109.180	109.760	0.580	TCS-7	Concentric
12	109.760	110.020	0.260	TCS-3	Eccentric - RHS
13	110.020	110.880	0.860	TCS-4	VUP
14	110.880	112.220	1.340	TCS-3	Eccentric - RHS
15	112.220	114.080	1.860	TCS-4	VUP+LVUP
16	114.080	115.280	1.200	TCS-3	Eccentric - RHS
17	115.280	116.120	0.840	TCS-4	LVUP
18	116.120	118.260	2.140	TCS-3	Eccentric - RHS
19	118.260	119.180	0.920	TCS-4	VUP
20	119.180	119.900	0.720	TCS-3	Eccentric - RHS
21	119.900	120.650	0.750	TCS-4	LVUP
22	120.650	122.470	1.820	TCS-3	Eccentric - RHS
23	122.470	123.410	0.940	TCS-4	VUP
24	123.410	123.910	0.500	TCS-3	Eccentric - RHS
25	123.910	124.860	0.950	TCS-6	VUP- Uni Direction
26	124.860	126.060	1.200	TCS-4	VUP- Both Direction
27	126.060	127.010	0.950	TCS-6	VUP- Uni Direction
28	127.010	127.470	0.460	TCS-2	Eccentric - LHS
29	127.470	128.410	0.940	TCS-4	LVUP
30	128.410	131.010	2.600	TCS-2	Eccentric - LHS
31	131.010	131.740	0.730	TCS-4	LVUP
32	131.740	132.585	0.845	TCS-2	Eccentric - LHS
33	132.585	135.315	2.730	TCS-3	Eccentric - RHS
34	135.315	136.430	1.115	TCS-4	VUP
35	136.430	137.070	0.640	TCS-3	Eccentric - RHS
36	137.070	138.730	1.660	TCS-4	LVUP + VUP
37	138.730	139.620	0.890	TCS-3	Eccentric - RHS
38	139.620	140.690	1.070	TCS-4	VUP- Both Direction
39	140.690	141.680	0.990	TCS-5	Bypass/ Realign
40	141.680	141.790	0.110	TCS-8	Bypass/ Realign
41	141.790	142.357	0.567	TCS-5	Bypass/ Realign
42	0.000	1.000		TCS-9	BHS SR on Jabalpur-Bhopal Road is to be reconstructed as MCW.
	Total Length (km)		**40.357**		

Note:

1. Any variations in the lengths specified in the above table shall not constitute a Change of Scope

2. Lengths mentioned in the above list for cross section types concerned to structure inclusive of structure length.

3. Retaining wall/ RE wall shall be provided for full height on all structures.

4. Toe wall (0.6m ht) to be provided where ROW is restricted and water bodies along the proposed highway on the sections specified in Schedule-B.

Signature Not Verified
Digitally Signed,
Name: HyperPKI Hyderabad India v3.0-HS230713051619(Pradeep

Signature Not Verified
Digitally Signed,
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

5. Chainages may be adjusted according to location of structures as per drawings.

5.1 The details of changes of cross section shown in the manual are given in schedule D.

6. Carriageway width tapering shall be provided 1 in 50 as per manual Clause no 2.5.4. Intermediate Sight Distance (Desirable Minimum Sight Distance) shall be followed for design of all vertical curves (Summit and Valley Curves) including structures as well as highways.

7. Provide detailing of placement and specification of Railing, Fencing and electric poles, etc.

7.1 Details of TCS are attached in Annexure – II of Schedule - B.

7.2 Mitigation measures work for slope be provided as per specifications wherever steep cutting section is involved.

3. Intersections and Grade Separated Intersections

All at-grade intersections and grade separated intersections shall be as per Section 3 of the manual. Existing at-grade intersections shall be improved to the prescribed standards.

The service road pavement composition shall be continued on cross roads of the intersections for the length specified for at-grade and grade separated intersections.

Properly designed intersections shall be provided at the locations and of types and features given in the tables below:

3.1. At-grade intersections:

(a) Major Junctions:

Sr. No.	Design Chainage (Km)	Junction Type	Leads to		Median Opening	Category of Cross Road	Carriageway width of cross road	Length of cross road to be developed	
			Left	Right				LHS	RHS
Nil									

(b) Minor Intersections:

Sr. No.	Design Chainage (Km)	Junction Type	Leads to		Median Opening	Category of Cross Road	Carriageway width of cross road	Length of cross road to be developed (M)	
			Left	Right				LHS	RHS
1	102.335	T	Sudon Village		No	VR	3.75	55	-
2	103.800	T	Sudon Village		No	VR	3.75	55	-
3	103.975	T		Baneta Village	No	VR	3.75	-	75
4	105.750	+	Ukai Lake	Baneta plant	No	VR	3.75	95	95

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05811496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Construction work of 4-laning of Shahganj bypass end to Badi (Package-IV) of NH-146B from design km 102.000 to design km 142.357 (Design Length 40.357 km) under NH(O) in the State of Madhya Pradesh on Hybrid Annuity Mode.

Sr. No.	Design Chainage (Km)	Junction Type	Leads to		Median Opening	Category of Cross Road	Carriageway width of cross road	Length of cross road to be developed (M)	
			Left	Right				LHS	RHS
5	106.150	+	Stone query	Ware house	Yes	VR	5.5	45	45
6	106.380	T		Stone query	No	VR	3.5	-	175
7	106.500	T		Stone query	No	VR	3.5	-	165
8	106.630	T		Stone query	No	VR	3.5	-	115
9	108.230	+	Jawahar Kheda	Sudania	No	VR	3.75	60	60
10	109.260	T	Satramau		No	VR	3.75	235	-
11	112.500	T		Hathnora	No	VR	3.75	-	80
12	114.420	T	Dobi		No	VR	3.75	100	-
13	116.930	+	Machhwai	Narmada Ghat	No	VR	3.75	55	55
14	117.835	+	Amon	Local Road	No	VR	3.75	55	55
15	121.330	T	Kosmi		No	VR	3.75	55	-
16	124.935	+	Baktara	Jontala	No	VR	3.75	75	75
17	125.000	+	Baktara	Khandwara	No	VR	3.75	60	60
18	125.310	+	Baktara	Arka	No	VR	3.75	65	65
19	126.120	+	Baktara	Kutnasir	No	VR	3.75	60	60
20	130.450	T	Nanpon	-	No	VR	3.75	70	-
21	133.190	T	Gajikhedi		No	VR	3.75	55	-
22	134.680	T		Amarwad	No	VR	3.75	-	60
23	138.370	T	Patni		No	VR	3.75	60	-
24	138.410	T		Babai	No	VR	3.75	-	65
25	142.230	+	NH45	Gaihalpur	No	VR	3.75	110	110

Note : As per para 3.1 note of circular dated 31.10.2023 the layout, geometric design and TCS of major/Minor junction shall be included in annexure to schedule B. details to be attached

1. Type of Junction to be improved as per manual.

2. The Concessionaire shall take up 'Detailed Engineering study' to ascertain further details of all intersections and treatment of the intersections shall be designed in accordance with the latest guidelines mentioned out in section-3 of the manual. Auxiliary lanes including storage, acceleration and deceleration lane along with physical islands to be provided.

The cross road at the junctions which are having a level difference from the main carriageway are to be improved at the level of main carriageway for the length of 30 meter and then to be merged with the cross road at the gradient not more than 1:50.

For minor / major layout for left-in / left out arrangement with physical islands with hazard marking. Where there is space constraint to provide physical islands, the effect of junction kept wide opened can be avoided by ghost island with marking.

3. For U-turn, Self-Regulated U-Turn facility shall be created. as per fig 3.6 of manual.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP3008CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

3.2. **At-Grade Intersections below Grade Separators/ Interchanges:** These shall be provided as given at para 2.9 of this Annexure-I of the Schedule B.

Sr. No.	Design Chainage (Km)	Junction Type	Leads to		U-Turn provision in Viaduct Spans	Category of Cross Road	Carriage way width of cross road	Length of cross road to be developed(M)	
			Left	Right				LHS	RHS
1	105.280	X	Panari	Baneta	Yes	VR	5.5m	85	85
2	106.885	T	Dungariy	-	Yes	VR	5.5m	75	-
3	108.850	T	Village	-	Yes	VR	5.5m	155	-
4	110.480	X	Itwar	Hatnora	Yes	VR	5.5m	105	105
5	112.710	X	Dobi	Sardarnagar	Yes	VR	5.5m	70	70
6	113.575	X	Dobi	Jait	Yes	VR	5.5m	60	60
7	115.675	X	Machwai	Jait	Yes	VR	5.5m	60	60
8	118.690	X	Sagpur	Nandner	Yes	VR	5.50m	55	55
9	120.275	T	-	Jontala	Yes	VR	5.5m	-	55
10	122.890	X	Siya	Jontala	Yes	VR	5.0m	55	55
11	124.400	T	Bakrara	-	Yes	Start of Bypass	7.0m	95	-
12	125.610	X	Bakrara	Khapipriya	Yes	VR	5.5m	95	95
13	126.540	T	Bakrara	-	Yes	End of Bypass	7.0m	80	-
14	127.940	X	Digwar	Kutnasir	Yes	VR	5.5m	75	75
15	131.395	T	-	Chandwar	Yes	VR	5.5m	-	55
16	135.950	X	Canal Road	Canal Road	Yes	Canal	5.5m	95	95
17	137.520	X	Village	Babi	Yes	VR	5.5m	60	60
18	138.360	T	Village	-	Yes	VR	5.5m	60	
19	139.930	X	Canal Road	Canal Road	Yes	Canal	5.5m	75	75
20	140.275	T	Badi	-	Yes	Start of Bypass	7.0m	235	-
21	142.357	T	Bhopal	Jabalpur	Yes	End of Bypass	2x10.5	100	100

Note:

1. The Concessionaire shall take up 'Detailed Engineering study' to ascertain further details of all intersections and treatment of the intersections shall be designed in accordance with the latest guidelines mentioned out in section-3 of manual.

2. Junction improvement under grade separators shall be carried out as per manual with proper entry/exit to cross roads and slip/service roads, etc. Auxiliary lanes including storage, acceleration and deceleration lane along with physical islands to be provided.

3. Location of grade-separated structures are indicative. Exact location should be decided in consultation with Independent Engineer based on Site Condition.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-VID1361146(MD encrypted)
Date: 29-Aug-2024 20:06:49

4. Intersection Layout, Entry/Exit, Right Turning Lane, U-Turns, Geometric Design and Typical Cross Sections of At-Grade Intersections below Grade Separators Has been included in Annexure to schedule-B.

5. Only Entry or Exit shall be designed at any location (provision of entry/exit by ghost island not permitted).

4. Road Embankment and Cut Section

Construction of road embankment/cuttings shall conform to the Specifications and Standards given in **section 4** of the manual. Notwithstanding anything to the contrary contained in this Agreement or Manual, the proposed profile of the project highway as indicated in the Annex-III of Schedule A shall be treated as minimum requirement.

Based on site/design requirement, the Concessionaire shall design the alignment plans and profiles of the project highway based on site/design requirement mentioned in Schedule B with approval from the Independent Engineer/Authority Engineer within the available Right of Way. However, it is clarified that bottom of subgrade level shall be at-least 1000 mm above Highest Flood Level (HFL)/ Ground water table (GWT)/ Original ground Level (OGL) (Ground level Obtained after cleaning & grubbing)/ Pound level, whichever is Higher for a greenfield/ bypass stretch.

The side slopes shall not be steeper than 2H:1V. In case, there is a ROW constraint than, suitable soil retaining structures shall be provided.

For stability of slope upto 3 metre height the turfing can be adapted. For the slope from 3-6 metre suitable, geocell, geo-grid, geo-green etc. can be provided with suitable drainage chutes as per IRC 56. For the slope more than 6 metre height, a complete slope stability analysis as per IRC:75 shall be done and the slopes shall be compulsory protected with stone pitching within stone masonry grid structure of 4x4 metre and suitable drains/chutes etc. shall be provided for effective drainage of the water. Details given in para 11 Special requirements.

If pond ash is being utilized for construction of embankment/approach it shall be as per IRC SP 58:2001. Concessionaire shall have to procure and use Pond/ Fly ash preferably. In case of non-availability of the same, Concessionaire shall make their own arrangement for procurement of alternative material/ Good earth and no change of scope will be considered.

Mitigation measures work for slope be provided as per specifications wherever steep cutting section is involved.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYD2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

5. Pavement design

5.1. Pavement design shall be carried out in accordance with Section 5 of the Manual.

5.2. Type of Pavement and Design requirement.

The pavement shall be flexible type for entire length of project highway except for toll plaza locations where rigid pavement shall be provided.

5.2.1. Design Period and Strategy Pavement shall be constructed for the entire length of Project Highway including paved shoulders. Flexible Pavement shall be designed for a minimum design period of 20 years and minimum sub grade CBR (Effective) of 8% and maximum subgrade CBR (Effective) of 10%. whereas Rigid pavement shall be designed for a minimum design period of 30 years. Stage construction shall not be permitted.

5.2.2. Recommended Pavement Design Notwithstanding anything to the contrary contained in this Agreement or the manual, the Concessionaire shall design the pavement of main carriageway for design traffic of 80 MSA.

5.2.2.1. Plastic waste material is to be used for construction of pavement in service road BC in confirmation to IRC SP 98-2020.

5.2.3 The pavement for service road/slip roads shall be designed for projected traffic subject to minimum as follows:

i. Service Roads in Built-up areas for minimum 20 MSA

ii. Slip Roads for minimum 20 MSA

iii. Service Roads in Rural Area for minimum 20 MSA

5.3 In order to meet the intended functional requirement of respective pavement layers on main carriageway, the minimum thickness of respective pavement layers for main carriageway and connecting cross roads/ service roads/ slip roads/ entry/exit locations, acceleration/ deceleration lane, right turning lanes shall, however, in no case be less than as given below:

5.3.1 Main carriageway, paved shoulder, median side paved strip, entry/exit locations, acceleration/ deceleration lane, right turning lanes (Flexible) with GSB/WMM

All combinations of pavement layers for design traffic should be given. The minimum details of all options of pavement layers for traffic load need to be provided to ensure the minimum pavement layer for all combination of for design traffic such as GSB/WMM, CTSB/**CTB, GSB/CTB etc to ensure the minimum crust in all possible combinations as per sprit of the circular.**

Pavement Composition	Minimum Crust Thickness (mm)
Subgrade	500
GSB	200
WMM	250
DBM	110
BC	50

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

5.3.2 Main carriageway, paved shoulder, median side paved strip, entry/exit locations, acceleration/ deceleration lane, right turning lanes (Flexible) with CTB/CTSB

Pavement Composition	Minimum Crust Thickness (mm)
Subgrade	500
CTB	105
CTSB	200
AIL	100
DBM	60
BC	40

5.3.3. Main carriageway, paved shoulder, median side paved strip, entry/exit locations, acceleration/ deceleration lane, right turning lanes (Rigid) -For Toll Plaza location.

Pavement Composition	Minimum Crust Thickness (mm)
Subgrade	500
GSB	150
DLC	150
PQC	300

5.3.4 crossroads/ service roads/ slip roads

Pavement Composition	Minimum Crust Thickness (mm)
Subgrade	500
CTSB	200
AIL	100
DBM	50
BC	30

5.4 Reconstruction of Stretches with New pavement

The following stretches of the existing road shall be dismantled/milled and reconstructed. These shall be designed as new pavement

Sr. No.	Design Chainage		Pavement Composition	Remarks
	From	To		
1.	102+000	114+380	Same as 5.3.1/5.3.2	
2.	114+380	114+650	Same as 5.3.3	At toll plaza
3.	114+650	124+250	Same as 5.3.1/5.3.2	
4.	126+750	140+050	Same as 5.3.1/5.3.2	
5.	0+000	1+000	Same as 5.3.1/5.3.2	BHS SR on Jabalpur-Bhopal Road is to be reconstructed as MCW.

5.5 Bituminous Mix for Overlay

The following stretches of the existing road shall be provided bituminous overlay as follows:

Sr. No.	Design Chainage		Overlay Pavement Composition	Remarks
	From	To		
			Nil.	

6. Roadside Drainage

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey v 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

6.1. Drainage system including surface and subsurface drains for the Project Highway including crossroads shall be provided as per section 6 of the manual. RCC Drain cum footpaths shall conform to the cross- sectional features and other details as given in Annexures to Schedule-B and shall be provided as under:

Details of RCC Drain Cum Footpath

Sr. No.	Design Chainage (Km)		Length (m)		Width of Drain (m)	Total Length (m)
	From	To	LHS	RHS		
1	103.640	104.390	0.750	0.750	1.5	1.500
2	104.900	105.740	0.840	0.840	1.5	1.680
3	106.460	107.300	0.840	0.840	1.5	1.680
4	108.480	109.180	0.700	0.700	1.5	1.400
5	110.020	110.880	0.860	0.860	1.5	1.720
6	112.220	114.080	1.860	1.860	1.5	3.720
7	115.280	116.120	0.840	0.840	1.5	1.680
8	118.260	119.180	0.920	0.920	1.5	1.840
9	119.900	120.650	0.750	0.750	1.5	1.500
10	122.470	123.410	0.940	0.940	1.5	1.880
11	123.910	124.860	0.950	0.950	1.5	1.900
12	124.860	126.060	1.200	1.200	1.5	2.400
13	126.060	127.010	0.950	0.950	1.5	1.900
14	127.470	128.410	0.940	0.940	1.5	1.880
15	131.010	131.740	0.730	0.730	1.5	1.460
16	135.315	136.430	1.115	1.115	1.5	2.230
17	137.070	138.730	1.660	1.660	1.5	3.320
18	139.620	140.690	1.070	1.070	1.5	2.140
Total			**17.915**	**17.915**		**35.830**

6.2.Unlined Drains other than above mentioned locations shall be provided in the entire project length which gets terminated at all crossroad locations. In case, the definite outfall is not available.

6.3.Median Drain

Lined drain shall be provided in the center of the median at super elevation locations and depressed median. Draining of Strom water from one carriageway to other carriageway is not permitted. the Concessionaire shall design the median drain based on site/design requirement mentioned in Schedule D with approval from the Independent Engineer and shall be connected with the nearest culvert/outfall.

6.4.Drainage arrangement between Main Carriageway and Service/Slip Roads

A suitable drainage arrangement for draining storm water of main carriageway shall be provided. Storm water of main carriageway to service road is not permitted.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29 Aug 2014 20:06:49

6.5. Drainage where Embankment Height is more than 3m

Drainage chutes shall be provided at suitable interval on embankment slopes. The drainage arrangement shall include kerb, cement concrete drainage channel at the edge roadway, Cement Concrete Chutes, CC bedding, energy dissipation basin, etc. Mountable Kerb shall be provided beyond the post of MBCB to channelize storm water into chute.

6.6.Drainage for Structures

A suitable drainage arrangement for draining storm water from deck slab shall be provided. Water shall not fall on any surface of the structures, or remain standing or flowing over the road below structure.

6.7. Drainage for Underpass and Subways Structures

A suitable drainage arrangement for draining storm water from Underpass and Subways shall be provided.

6.8. Drainage arrangement of Retaining Structures

Vertical Drop-down drainage pipes with suitable cleaning provision shall be provided at suitable interval. Drainage fixtures and dropdown pipes shall be of rigid, corrosion resistant material not less than 100mm dia. The Storm water of main carriageway draining on service road is not permitted.

7. Design of Structures

7.1. General

Project Highway is proposed to be constructed to Four lane configuration. As such, superstructure of all bridges, culverts and structures is to be designed for edge movement of the vehicle considering stitching of new superstructure in future due to widening for additional lane. Special vehicle loading is to be considered in design of all bridges, culverts and structures.

All structures except wherever expansion joints have been provided, the pavement layers WMM, DBM & BC shall be continued over the structures for smooth riding quality of the project highway. These structures shall be designed considering the dead load of pavement (WMM, DBM, BC, etc.) layers.

All major structures will be designed preferably as continuous slab to reduce the number of expansion joints on the MJB/ ROBs/ flyover/ Interchange etc.

7.1.1. All bridges, culverts and structures shall be designed for IRC class Special Vehicle (SV) loading as per IRC: 6 and constructed in accordance with section-7 of the manual and shall conform to the cross-sectional features and other details specified therein.

7.1.2. The overall width of the structures shall be as given in Para 7.3 of Annex-I of Schedule-B.

7.1.3. The Safety Barrier and Footpath on Bridges and RoB shall continue on approaches. The footpath shall be provided with paved surface & railing till the embankment height is more than 3m.

Details of Structures with footpaths

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS32307130516179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Sr. No.	Location at km	Skew Angle	Footpath Width (m)		Remarks
			Left	Right	
1	105+740	0	1.5	1.5	
2	107+195	0	1.5	1.5	
3	108+760	0	1.5	1.5	
4	109+400	0	1.5	1.5	
5	109+550	0	1.5	1.5	

Sr. No.	Location at km	Skew Angle	Footpath Width (m)		Remarks
			Left	Right	
6	114+365	0	1.5	1.5	
7	116+440	0	-	1.5	Only one side structure is proposed
8	119+700	0	1.5	1.5	
9	120+735	0	-	1.5	Only one side structure is proposed
10	123+235	0	1.5	1.5	
11	126+630	25	1.5	1.5	
12	135+950	0	1.5	1.5	
13	137+175	0	1.5	1.5	

7.1.4. All bridges shall be high level bridges.

7.1.5. All structures shall be designed to carry utility services on outer side of RCC barrier/Railing as per site requirement.

7.1.6. Cross section of the new culverts and bridges at deck level for the Project Highway shall conform to the typical cross sections given in Section 2.10 of the Schedule-B.

All Major and Minor Bridges to be designed for approach protection with concrete Toe wall with filter media and pitching up to HFL of bridge +0.6 m with full height pitching in cone filling portion of all four sides of abutments.

All river bridges provided with stairs in all four-cone filling portion for easy assessable bridges and approaches.

7.2. Culverts

7.2.1. Overall width of all culverts shall be equal to the roadway width of the approaches. The overall width of culverts shall be including width of main carriageway and slip/service roads/Entry ramps/Exit Ramps/ Acceleration/Deceleration lanes, etc. All culverts shall also be continued in median and in gap between main carriageway and service road.

7.2.2. New/Reconstruction of existing RCC pipe culverts: The existing culverts at the following locations shall be re-constructed as new culverts:

Sr. No	Design Chainage	Culvert Type	Skew Angle	Span/ Opening (m)	New/ Reconstruction	Culvert Crossing Type (Balancing/Stream, etc.)	Remarks
1	103+100	HPC	0	1X1.2	Re-Construction	Stream	
2	104+950	HPC	0	1X1.2	Re-Construction	Stream	
3	111+790	HPC	30	1X1.2	Re-Construction	Stream	
4	114+100	HPC	0	2X1.2	Re-Construction	Stream	

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed,
Name: PROXKey (V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Sr. No	Design Chainage	Culvert Type	Skew Angle	Span/ Opening (m)	New/ Reconstruction	Culvert Crossing Type (Balancing/Stream, etc.)	Remarks
5	115+050	HPC	0	2X1.2	Re-Construction	Stream	
6	120+300	HPC	0	1X1.2	Re-Construction	Stream	
7	124+700	HPC	0	1X1.2	NEW-Construction	Stream	
8	125+240	HPC	0	1X1.2	NEW-Construction	Stream	
9	125+470	HPC	0	1X1.2	NEW-Construction	Stream	
10	125+625	HPC	0	1X1.2	NEW-Construction	Stream	
11	125+800	HPC	0	1X1.2	NEW-Construction	Stream	
12	125+980	HPC	0	1X1.2	NEW-Construction	Stream	
13	126+130	HPC	0	1X1.2	NEW-Construction	Stream	
14	126+280	HPC	0	1X1.2	NEW-Construction	Stream	
15	131+640	HPC	0	1X1.2	Re-Construction	Stream	
16	132+110	HPC	0	1X1.2	Re-Construction	Stream	
17	132+215	HPC	0	1X1.2	Re-Construction	Stream	
18	135+775	HPC	0	1X1.2	Re-Construction	Stream	
19	139+135	HPC	0	1X1.2	Re-Construction	Stream	
20	139+240	HPC	0	1X1.2	Re-Construction	Stream	
21	140+380	HPC	0	1X1.2	NEW-Construction	Stream	
22	141+240	HPC	0	1X1.2	NEW-Construction	Stream	
23	141+480	HPC	0	1X1.2	NEW-Construction	Stream	
24	141+780	HPC	0	1X1.2	NEW-Construction	Stream	
25	141+930	HPC	0	1X1.2	NEW-Construction	Stream	
26	142+220	HPC	0	1X1.2	NEW-Construction	Stream	
27	142+300	HPC	0	1X1.2	NEW-Construction	Stream	

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed,
Name: PROXKey V 3.0-SID05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

7.2.3.Widening of existing RCC pipe culverts

All existing culverts which are to be retained shall be widened to the proposed roadway width of the Project Highway as per the typical cross section given in section 7 of the Manual. Repairs and strengthening of existing structures where required shall be carried out.

Sr. No	Design Chainage	Culvert Type	Skew Angle	Span/ Opening (m)	Repairs / Rehabilitation proposals	Culvert Crossing Type (Balancing/ Stream, etc.)	Remarks
Nil.							

7.2.4. Construction of Box Culverts:

7.2.5. New culverts (given in table below) shall be constructed for width equal to the proposed roadway width of the Project Highway & as per typical cross-section given in schedule B. The details are given as under:

Box Culverts

Sr. No	Design Chainage (km)	Span Arrangement (m)	Skew Angle	Culvert Crossing Type	Remarks
1	105+780	1x5x3.8	0	Stream	
2	124+520	1x2x2.2	46	Stream	
3	124+935	1x2x2.2	25	Stream	
4	125+005	1x4x3.7	0	Stream	
5	129+365	1X2x2.3	0	Stream	
6	140+215	1X2x2.2	0	Stream	
7	140+655	1x2x2.2	53	Stream	

7.2.6. Widening of existing box culverts

Sr. No	Design Chainage (km)	Span Arrangement (m)	Skew Angle	Culvert Crossing Type	Remarks
1	123+535	1x4x4.3	0	Stream	
2	133+200	1x4x3.5	0	Stream	

Reconstruction of Box Culvert

Sr. No	Design Chainage (km)	Span Arrangement (m)	Skew Angle	Culvert Crossing Type	Remarks
1	106+345	1x3x3.3	0	Stream	
2	106+540	1x3x3.2	0	Stream	
3	106+710	1x4x3.7	0	Stream	
4	114+870	1x2x2.3	0	Stream	
5	118+420	1x2x2.2	0	Stream	
6	122+075	1x2x2.3	68	Stream	
7	136+985	1X2x2.3	0	Stream	
8	139+935	1X5x3.7	0	Stream	

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

All existing culverts which are to be retained shall be widened to the proposed roadway width of the Project Highway as per the typical cross section given in Schedule-B. Repairs and strengthening of existing structures where required shall be carried out.

7.2.7. Culverts on Crossroads:

Sr. No	Design Chainage (km)	Span Arrangement (m)	Type (Box/Pipe)	Length of Culvert (M)	Side	Remark
1	102.335	1x1.2	HPC	7.5	LHS	
2	103.800	1x1.5	Box	7.5	LHS	
3	103.975	1x1.5	Box	7.5	RHS	
4	105.280	1x1.5	Box	10	BHS	
5	105.750	1x1.2	HPC	7.5	BHS	
6	106.150	1x1.2	HPC	7.5	BHS	
7	106.380	1x1.2	HPC	7.5	RHS	
8	106.500	1x1.5	Box	7.5	RHS	
9	106.630	1x1.5	Box	7.5	RHS	
10	106.885	1x1.5	Box	10	LHS	
11	108.230	1x1.2	HPC	7.5	BHS	
12	108.850	1x1.5	Box	10	LHS	
13	109.260	1x1.2	HPC	7.5	LHS	
14	110.480	1x1.5	Box	10	BHS	
15	112.500	1x1.5	Box	7.5	RHS	
16	112.710	1x1.5	Box	10	BHS	
17	113.575	1x1.5	Box	10	BHS	
18	114.420	1x1.2	HPC	7.5	LHS	
19	115.675	1x1.5	Box	10	BHS	
20	116.930	1x1.2	HPC	7.5	BHS	
21	117.835	1x1.2	HPC	7.5	BHS	
22	118.690	1x1.5	Box	10	BHS	
23	120.275	1x1.5	Box	10	RHS	
24	121.330	1x1.2	HPC	7.5	LHS	
25	122.890	1x1.5	Box	10	BHS	
26	124.400	1x1.5	Box	12	LHS	
27	124.935	1x1.5	Box	7.5	BHS	
28	125.000	1x1.5	Box	7.5	BHS	
29	125.310	1x1.5	Box	7.5	BHS	
30	125.610	1x1.5	Box	10	BHS	
31	126.120	1x1.5	Box	7.5	BHS	
32	126.540	1x1.5	Box	12	LHS	
33	127.940	1x1.5	Box	10	BHS	
34	130.450	1x1.2	HPC	7.5	LHS	
35	131.395	1x1.5	Box	10	RHS	
36	133.190	1x1.2	HPC	7.5	LHS	
37	134.680	1x1.2	HPC	7.5	RHS	
38	135.950	1x1.5	Box	10	BHS	
39	137.520	1x1.5	Box	10	BHS	
40	138.360	1x1.5	Box	10	LHS	
41	138.370	1x1.5	Box	7.5	LHS	
42	138.410	1x1.5	Box	7.5	RHS	
43	139.930	1x1.5	Box	10	BHS	
44	140.275	1x1.5	Box	12	LHS	
45	142.230	1x1.2	HPC	7.5	BHS	

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed,
Name: PROXKey V 3.0-WD03611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Sr. No	Design Chainage (km)	Span Arrangement (m)	Type (Box/Pipe)	Length of Culvert (M)	Side	Remark
46	142.357	1x1.5	Box	40	BHS	Along the NH-45

7.2.8. Utility ducts in bypasses (Greenfield as well as Brownfield which is being upgraded) in form of NP-4 RCC Pipe Dia 600 mm shall be provided across the Project Highway @ 0.50 km c/c and along with inspection chamber were directed for crossing of utilities anywhere as per manual (Clause 2.16) requirements.

Sr. No	Design Chainage (km)		Remark
	From	To	
1	102.000	103.600	Agriculture
2	104.500	104.900	Agriculture
3	105.750	106.700	Agriculture
4	107.400	108.500	Agriculture
5	109.650	110.000	Agriculture
6	110.900	112.200	Agriculture
7	112.900	115.300	Agriculture
8	115.900	118.300	Agriculture
9	119.100	119.900	Agriculture
10	120.400	130.500	Agriculture
11	131.800	137.100	Agriculture
12	137.700	142.300	Agriculture

7.3. Bridges

7.3.1. Existing bridges to be re-constructed/widened:

1. Existing bridges proposed for reconstructed as new structures:

Sr. No	Design Chainage (Km)	Total Proposed length (m)	Type of Crossing	Total Proposed width (m)		Typical Cross Section	Skew Angle
				MCW	SR		
1	105+740	3x6.5	Stream	2x10.5	2x10.80	TCS4	0
2	107+195	3x6.5	Stream	10.5+12.5	2x10.80	TCS6	0
3	108+760	1X7	Stream	2x10.5	2x10.80	TCS4	0
4	109+400	3x10	Stream	2x12.5	-	TCS7	0
5	109+550	4x30	Stream	2x12.5	-	TCS7	0
6	114+365	1x6	Stream	2x12.5	-	TCS3	0
7	119+700	2x6.5	Stream	2x12.5	-	TCS3	0
8	123+235	1x6	Stream	2x10.5	2x10.80	TCS4	0
9	135+950	1X7	CANAL	2x10.5	2x10.80	TCS4	0
10	137+175	3x5	Stream	2x10.5	2x10.80	TCS4	0

2. Existing narrow bridges proposed to be retained and widened:

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD0614496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Sr. No	Design Chainage (Km)	Total Proposed length (m)	Type of Crossing	Remark
1	116+440	2x5	Stream	Existing 2 lane Bridge is Retained on LHS
2	120+735	4x6.4	Stream	

7.3.2.Additional New Bridges: New bridges at the following locations on the Project Highway shall be constructed. GADs for the new bridges are attached in the drawings folder.

Sr. No	Design Chainage (Km)	Total Proposed length (m)	Type of Crossing	Total Proposed width (m)		Typical Cross Section	Skew Angle	Remark
				MCW	SR			
1	116+440	2x5	Stream	1x12.5	-	TCS3	0	RHS
2	120+735	4x6.4	Stream	1x12.5	-	TCS3	0	RHS
3	126+630	2x5	Stream	10.5+12.5	9.7+10.80	TCS6	25	

7.3.3. The railings of existing bridges shall be replaced by crash barriers at the following locations:

Sr. No	Design Chainage		Length (km)	Remarks
	From	To		
Nil				

7.3.4. The existing bridges/ RoB/ Grade Separators/ RUB retained on the project highway shall be upgraded and rehabilitation measures/proposals shall be specified as follows.

Sr. No.	Location at km	Rehabilitation Proposals	Remarks
		Nil.	

7.3.5. Structures in marine environment: NIL

7.4.Railroad Bridges (ROB/RUB)

7.4.1. Design, construction and detailing of ROB/RUB shall be as specified in Section 7 of the manual.

7.4.2. Road over bridges (road over rail) shall be provided at the following locations, as per GAD drawings attached:

Sr. No.	Design Chainage (Km)	Proposed Span Arrangement (m)	Type of super-structure (i.e. Bow string, simply supported composite structure etc.	Name of crossing	Total Width (m)	Skew Angle	Remarks
Nil							

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Note:

The details of span and type of super-structure have to be as per approved GAD by the railways. If the length/width of the span/ type of super-structure is changed due to any reason the COS shall be considered.

1. ROB shall be designed, constructed and maintained as per the requirements of Railway authorities. The construction plan shall be prepared in consultation with the concerned railway authority.
2. The ROB shall be constructed and maintained by the concessionaire under supervision of the Railways.
3. All charges payable to the Railways like D&G, Capitalized maintenance, signaling, cabling, OHE modification, earthing etc. except P&E charges shall be borne by the Concessionaire.

7.4.3. Road under bridges (road under railway line) shall be provided at the following level crossings, as per GAD drawings attached:

Sr. No.	Design Chainage	Proposed Span Arrangement (m)	Name of crossing	Total Width (m)	Skew Angle	Remarks
Nil						

7.5 Grade Separated Structures

The grade separated structures shall be provided at the locations and of the type and length specified in paragraphs 2.9,2.10 and 3 of Annexure-I of Schedule-B.

7.6 FoB/Skywalks

FoB/Skywalks shall be provided in build-up areas/ near schools.

Sr. No.	Location at km	FoB Type	Remarks
Nil			

7.7 **A summary of Culverts, Bridges and Structures shall be presented as follows:**

Sr. No.	Name of the Structure	Total Numbers	Remarks
1	Major Bridge	1	-
2	Minor Bridge	12	-
3	ROB& RUB	-	-
4	VUP (Single Span)	9	-
5	VUP (Multi Span)	6	
6	LVUP	6	-
7.	SVUP	-	-
8.	FoB	-	-
9	Box Culverts	17	-
10	Pipe Culverts	27	-

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

8. Traffic Control Devices and Road Safety Works

8.1. Traffic control devices and road safety works shall be provided in accordance with Section 9 of the IRC:SP: 84/87

8.2. Traffic Signs:

Traffic signs shall be provided as per IRC 67 as mentioned in Schedule-C.

8.3.Pavement Marking:

Pavement markings shall be completed as per IRC 35 as mentioned in Schedule-C.

8.4.Safety Barrier:

The safety barriers shall be provided in accordance with Section-9 of the Clause 9.7 of the manual.

The Safety Barrier length proposed are excluding the safety barrier already proposed on Culverts, Grade Separated Structures, Interchange, Bridges, RoB and RUB as applicable cross sections respectively.

End Treatment of Steel barriers/Rope Barrier shall be specified i.e., **MELT or P-4 confirming to EN 1317-4**, TT, MBCB barrier to Concrete Barrier **End** Treatment to Concrete barrier shall be done as specified in.

The details of the location are as below:

S.No.	Item	LHS		RHS		Total Length (Km)	Remarks
		(From)	(To)	(From)	(To)		
1	W-beam Single faced metal crash barrier			Nil.			
2	Thrie-beam Single faced metal crash barrier	103.640	103.994	103.640	103.994	0.708	
		104.006	104.390	104.006	104.390	0.768	
		104.900	105.274	104.900	105.274	0.748	
		105.286	105.730	105.286	105.730	0.888	
		108.480	108.757	108.480	108.757	0.554	
		108.764	108.843	108.764	108.843	0.158	
		108.858	109.385	108.858	109.385	1.054	
		109.415	109.490	109.415	109.490	0.150	
		109.610	109.760	109.610	109.760	0.300	
		110.020	110.473	110.020	110.473	0.906	
		110.488	110.880	110.488	110.880	0.784	
		112.220	112.680	112.220	112.680	0.920	
		112.740	113.568	112.740	113.568	1.656	
		113.583	114.080	113.583	114.080	0.994	
		115.280	115.669	115.280	115.669	0.778	
		115.681	116.120	115.681	116.120	0.878	
		118.260	118.683	118.260	118.683	0.846	
		118.698	119.180	118.698	119.180	0.964	
		119.900	120.269	119.900	120.269	0.738	
		120.281	120.650	120.281	120.650	0.738	

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD0571496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

S.No.	Item	LHS		RHS		Total Length (Km)	Remarks
		(From)	(To)	(From)	(To)		
		122.470	122.883	122.470	122.883	0.826	
		122.898	123.232	122.898	123.232	0.668	
		123.238	123.410	123.238	123.410	0.344	
		124.860	125.580	124.860	125.580	1.440	
		125.640	126.060	125.640	126.060	0.840	
		127.470	127.933	127.470	127.933	0.926	
		127.948	128.410	127.948	128.410	0.924	
		131.010	131.389	131.010	131.389	0.758	
		131.401	131.740	131.401	131.740	0.678	
		135.315	135.935	135.315	135.935	1.240	
		135.935	135.954	135.935	135.954	0.038	
		135.965	136.430	135.965	136.430	0.930	
		137.070	137.168	137.070	137.168	0.196	
		137.183	137.514	137.183	137.514	0.662	
		137.526	138.353	137.526	138.353	1.654	
		138.368	138.730	138.368	138.730	0.724	
		139.620	139.915	139.620	139.915	0.590	
		139.945	140.264	139.945	140.264	0.638	
		140.286	140.690	140.286	140.690	0.808	
		141.680	141.790	141.680	141.790	0.220	
		Total				**28.776**	
3	wire rope safety barrier			Nil.			
4	W-beam Double faced metal crash barrier			Nil.			
5	Thrie-beam Double faced metal crash barrier			Nil.			
6	Concrete Single faced barriers	103620	104400	103620	104400	1560	
		104880	105760	104880	105760	1760	
		105726.8	105753.3	105726.8	105753.3	53	
		105754	105766	105754	105766	24	
		106340	106350	106340	106350	20	
		106440	107300	106440	107300	1720	
		106535	106545	106535	106545	20	
		106704.5	106715.5	106704.5	106715.5	22	
		107181.8	107208.3	107181.8	107208.3	53	
		108480	109180	108480	109180	1400	
		108753	108767	108753	108767	28	
		109381.5	109418.5	109381.5	109418.5	74	
		109486.5	109613.5	109486.5	109613.5	254	
		110020	110880	110020	110880	1720	
		112280	114040	112280	114040	3520	
		114358.5	114371.5	114358.5	114371.5	26	
		114865.5	114874.5	114865.5	114874.5	18	

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

S.No.	Item	LHS		RHS		Total Length (Km)	Remarks
		(From)	(To)	(From)	(To)		
		115300	116080	115300	116080	1560	
		116431.5	116448.5	116431.5	116448.5	34	
		118260	119200	118260	119200	1880	
		118415.5	118424.5	118415.5	118424.5	18	
		119690	119710	119690	119710	40	
		119900	120640	119900	120640	1480	
		120718.7	120751.3	120718.7	120751.3	65.2	
		122070.5	122079.5	122070.5	122079.5	18	
		122480	123320	122480	123320	1680	
		123228.5	123241.5	123228.5	123241.5	26	
		123529.5	123540.5	123529.5	123540.5	22	
		123940	127010	123940	127010	6140	
		124515.5	124524.5	124515.5	124524.5	18	
		124930.5	124939.5	124930.5	124939.5	18	
		124999.5	125010.5	124999.5	125010.5	22	
		126621.5	126638.5	126621.5	126638.5	34	
		127470	128340	127470	128340	1740	
		129360.5	129369.5	129360.5	129369.5	18	
		131010	131740	131010	131740	1460	
		133194.5	133205.5	133194.5	133205.5	22	
		135380	136400	135380	136400	2040	
		135943	135957	135943	135957	28	
		136980.5	136989.5	136980.5	136989.5	18	
		137070	138730	137070	138730	3320	
		137164	137186	137164	137186	44	
		139640	140690	139640	140690	2100	
		139919	139931	139919	139931	24	
		140210.5	140219.5	140210.5	140219.5	18	
		140650.5	140659.5	140650.5	140659.5	18	
		Total in Km				**36.178**	
7	Concrete Double-faced barriers			Nil.			
8	Pedestrian guardrails			Nil.			
9	End Treatment for Steel Barriers	103.640	MELT	103.640	TT		Start of WBCB MELT
		104.006	MELT	104.006	TT		
		104.900	MELT	104.900	TT		
		105.286	MELT	105.286	TT		
		108.480	MELT	108.480	TT		
		108.764	MELT	108.764	TT		
		108.858	MELT	108.858	TT		
		109.415	MELT	109.415	TT		
		109.610	MELT	109.610	TT		
		110.020	MELT	110.020	TT		
		110.488	MELT	110.488	TT		
		112.220	MELT	112.220	TT		

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey (NC2.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Construction work of 4-laning of Shahganj bypass end to Badi (Package-IV) of NH-146B from design km 102.000 to design km 142.357 (Design Length 40.357 km) under NH(O) in the State of Madhya Pradesh on Hybrid Annuity Mode.

S.No.	Item	LHS		RHS		Total Length (Km)	Remarks
		(From)	(To)	(From)	(To)		
		112.740	MELT	112.740	TT		
		113.583	MELT	113.583	TT		
		115.280	MELT	115.280	TT		
		115.681	MELT	115.681	TT		
		118.260	MELT	118.260	TT		
		118.698	MELT	118.698	TT		
		119.900	MELT	119.900	TT		
		120.281	MELT	120.281	TT		
		122.470	MELT	122.470	TT		
		122.898	MELT	122.898	TT		
		123.238	MELT	123.238	TT		
		124.860	MELT	124.860	TT		
		125.640	MELT	125.640	TT		
		127.470	MELT	127.470	TT		
		127.948	MELT	127.948	TT		
		131.010	MELT	131.010	TT		
		131.401	MELT	131.401	TT		
		135.315	MELT	135.315	TT		
		135.935	MELT	135.935	TT		
		135.965	MELT	135.965	TT		
		137.070	MELT	137.070	TT		
		137.183	MELT	137.183	TT		
		137.526	MELT	137.526	TT		
		138.368	MELT	138.368	TT		
		139.620	MELT	139.620	TT		
		139.945	MELT	139.945	TT		
		140.286	MELT	140.286	TT		
		141.680	MELT	141.680	TT		
		103.994	TT	103.994	MELT		
		104.390	TT	104.390	MELT		
		105.274	TT	105.274	MELT		
		105.730	TT	105.730	MELT		
		108.757	TT	108.757	MELT		
		108.843	TT	108.843	MELT		
		109.385	TT	109.385	MELT		
		109.490	TT	109.490	MELT		
		109.760	TT	109.760	MELT		
		110.473	TT	110.473	MELT		End of MBCB TT
		110.880	TT	110.880	MELT		
		112.680	TT	112.680	MELT		
		113.568	TT	113.568	MELT		
		114.080	TT	114.080	MELT		
		115.669	TT	115.669	MELT		
		116.120	TT	116.120	MELT		
		118.683	TT	118.683	MELT		
		119.180	TT	119.180	MELT		
		120.269	TT	120.269	MELT		

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep

Signature Not Verified
Digitally Signed,
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

S.No.	Item	LHS		RHS		Total Length (Km)	Remarks
		(From)	(To)	(From)	(To)		
		120.650	TT	120.650	MELT		
		122.883	TT	122.883	MELT		
		123.232	TT	123.232	MELT		
		123.410	TT	123.410	MELT		
		125.580	TT	125.580	MELT		
		126.060	TT	126.060	MELT		
		127.933	TT	127.933	MELT		
		128.410	TT	128.410	MELT		
		131.389	TT	131.389	MELT		
		131.740	TT	131.740	MELT		
		135.935	TT	135.935	MELT		
		135.954	TT	135.954	MELT		
		136.430	TT	136.430	MELT		
		137.168	TT	137.168	MELT		
		137.514	TT	137.514	MELT		
		138.353	TT	138.353	MELT		
		138.730	TT	138.730	MELT		
		139.915	TT	139.915	MELT		
		140.264	TT	140.264	MELT		
		140.690	TT	140.690	MELT		
		141.790	TT	141.790	MELT		

9. Roadside Furniture

9.1. It shall be provided as per the details mentioned in Schedule-C.

10. Hazardous Locations

The safety barriers shall be provided at the following hazardous location such as ponds, well, electric sub-station, Electric tower, spilt carriageway, etc.

Sr. No.	Location Stretch		Type of Safety Barrier	LHS/RHS
	From (Km)	To (Km)		
Nil				

11. Special Requirement:

Retaining Structure and protection works shall be provided at locations as indicated below and as provided in TCS schedule in cl. 2.11 of schedule-B.

(a) Reinforced earth wall shall be provided are following:

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey v 3.0-WD861196(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Sr. No.	Design Chainage (Km)		Length (m)		Total Length(m)	Retaining Structure/ Toe Wall	Type of Safety Barrier	Remarks
	From	To	LHS	RHS				
1	103.620	104.400	0.780	0.780	1.560	RE wall	Friction Slab with	
2	104.880	105.760	0.880	0.880	1.760	RE wall		
3	106.440	107.300	0.860	0.860	1.720	RE wall		
4	108.480	109.180	0.700	0.700	1.400	RE wall		
5	110.020	110.880	0.860	0.860	1.720	RE wall		

Sr. No.	Design Chainage (Km)		Length (m)		Total Length(m)	Retaining Structure/	Type of Safety	Remarks
	From	To	LHS	RHS		Toe Wall	Barrier	
6	112.280	114.040	1.760	1.760	3.520	RE wall	Crash	
7	115.300	116.080	0.780	0.780	1.560	RE wall	Barrier	
8	118.260	119.200	0.940	0.940	1.880	RE wall		
9	119.900	120.640	0.740	0.740	1.480	RE wall		
10	122.480	123.320	0.840	0.840	1.680	RE wall		
11	123.940	127.010	3.070	3.070	6.140	RE wall		
12	127.470	128.340	0.870	0.870	1.740	RE wall		
13	131.010	131.740	0.730	0.730	1.460	RE wall		
14	135.380	136.400	1.020	1.020	2.040	RE wall		
15	137.070	138.730	1.660	1.660	3.320	RE wall		
16	139.640	140.690	1.050	1.050	2.100	RE wall		
	Total Length (km)		**17.540**	**17.540**	**35.080**			

(b) Toe wall shall be provided are following:

Sr. No.	Design Chainage (Km)		Length (m)		Total Length	Average Height(m)	Retaining Structure/	Remarks
	From	To	LHS	RHS	(m)		Toe Wall	
1	109.18	109.37	190	190	380	0.5m	Toe Wall	
2	109.625	109.7	75	75	150	0.4m	Toe Wall	
3	141.685	141.79	105	105	210	0.3m	Toe Wall	
	Total Length		**370**	**370**	**740**			

(C) Retaining wall shall be provided are following:

Sr. No.	Design Chainage (Km)		Length (m)		Total Length	Average Height(m)	Retaining Structure/
	From	To	LHS	RHS	(m)		Toe Wall
1	109425	109625	200	200	400	5.5m	Retaining Wall
2	126580	126617	37	37	74	3.0m	Retaining Wall
3	126643	127000	357	357	714	3.0m	Retaining Wall
	Total		**594**	**594**	**1188**		

12. Open Well within RoW

The Open well shall be identified and appropriate treatment shall be provided.

Sr. No.	Design Chainage	Well Dimension	Well Depth	Filling Material for Well	Slab on Top of Well Yes/No	Remarks
Nil						

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2008CSP India v3.0-HS323071305161179(Pradeep

13. Shifting of Utilities

The Concessionaire shall undertake the work of shifting of any utility (including electric lines, water pipes, gas pipelines and telephone cables) to an appropriate location or alignment, in accordance with the provisions of Concession Agreement.

Signature Not Verified
Digitally Signed,
Name: PROXKey (3.0 WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Shifting of obstructing existing utilities indicated in Schedule A to an appropriate location in accordance with the standards and Specification of concern Utility Owning Departments is a part of scope of work for the *Concessionaire*. The bidder may visit the site and assess the quantum of shifting of utilities for the project before submission of the bid. Copy of Utility relocation plan is enclosed. The specifications of concerned Utility Owning Department shall be applicable.

The details of existing utilities as per schedule A and relocation plan as per approved estimate of the same should be specified in utility plan.

Note: -

(a) The type/spacing/size/specifications of poles/towers/lines/cables to be used in shifting work shall be as per the guidelines of utility owning department and it is to be agreed solely between the Concessionaire and the utility owning department. No change of scope shall be admissible and no cost shall be paid for using different type/spacing/size/specifications in shifted work in comparison to those in the existing work or for making any overhead crossings to underground as per requirement of utility owning department and/or construction of project highway. The Concessionaire shall carry out joint inspection with utility owning department and get the estimates from utility owning department. The assistance of the Authority is limited to giving forwarding letter on the proposal of Concessionaire to utility owning department whenever asked by the Concessionaire. The decision/approval of utility owning department shall be binding on the Concessionaire.

(b) The dismantled material /scrap of existing Utility to be shifted/dismantled shall belong to the Concessionaire who would be free to dispose-off the dismantled material as deemed fit by them unless the Concessionaire is required to deposit the dismantled material to utility owning department as per the norms and practice and, in that case the amount of credit for dismantled material may be availed by the Concessionaire as per the estimate agreed between them.

(c) The utilities shall be handed over after shifting work is completed to Utility Owning Department to their entire satisfaction. The maintenance liability shall rest with the Utility Owning Department after handing over process is complete as far as utility shifting works are concerned.

(d) Existing lights, junction boxes, connection to individual properties along the affected section shall be disconnected and reconnected as part of utility relocation and the same shall be in the scope of the Concessionaire.

14. **Work Zone Traffic Management Plans** Annexure-ii Schedule B- Typical Cross Sections

The traffic diversion plans shall be prepared as per IRC SP 55 for smooth flow of traffic and Vehicular diversion plan shall be proposed for construction of Culvert, Grade Separated Structures, Bridges, RoB/RUB, etc. and traffic management plan for widening/ reconstruction of carriageway.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYperPKI 2011 CCA India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Annexure – II *(Schedule – B)* Typical Cross Sections

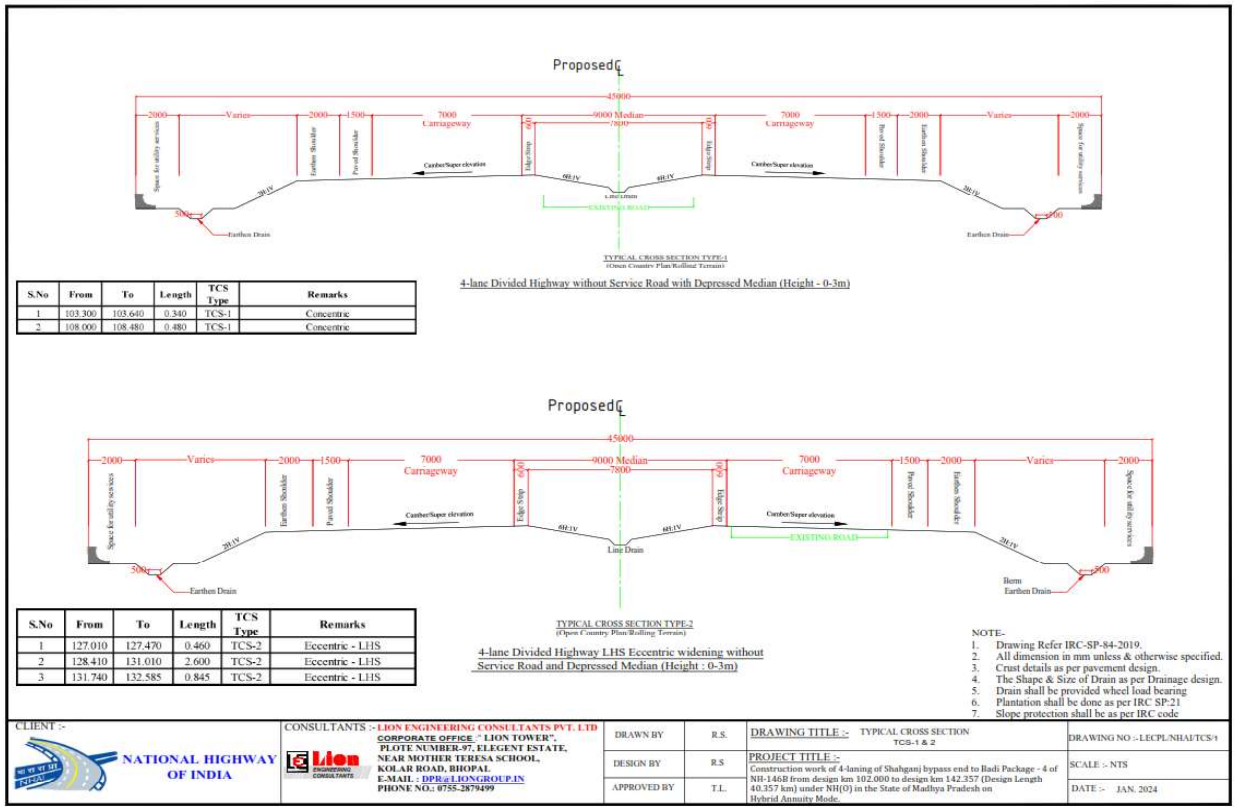

S.No	From	To	Length	TCS Type	Remarks
1	103.300	103.640	0.340	TCS-1	Concentric
2	108.000	108.480	0.480	TCS-1	Concentric

S.No	From	To	Length	TCS Type	Remarks
1	127.010	127.470	0.460	TCS-2	Eccentric - LHS
2	128.410	131.010	2.600	TCS-2	Eccentric - LHS
3	131.740	132.585	0.845	TCS-2	Eccentric - LHS

NOTE-
1. Drawing Refer IRC-SP-84-2019.
2. All dimension in mm unless & otherwise specified.
3. Crust details as per pavement design.
4. The Shape & Size of Drain as per Drainage design.
5. Drain shall be provided wheel load bearing.
6. Plantation shall be done as per IRC SP:21
7. Slope protection shall be as per IRC code

CLIENT :- NATIONAL HIGHWAY OF INDIA

CONSULTANTS :- LION ENGINEERING CONSULTANTS PVT. LTD
CORPORATE OFFICE : LION TOWER", PLOT# NUMBER-97, ELEGENT ESTATE, NEAR MOTHER TERESA SCHOOL, KOLAR ROAD, BHOPAL
E-MAIL : DPR@LIONGROUP.IN
PHONE NO.: 0755-2879499

DRAWN BY	R.S.	DRAWING TITLE :- TYPICAL CROSS SECTION TCS-1 & 2	DRAWING NO :- LECPL/NHAI/TCS/1
DESIGN BY	R.S	PROJECT TITLE :- Construction work of 4-laning of Shahganj bypass end to Badi Package - 4 of NH-146B from design km 102.000 to design km 142.357 (Design Length 40.357 km) under NH(O) in the State of Madhya Pradesh on Hybrid Annuity Mode.	SCALE :- NTS
APPROVED BY	T.L.		DATE :- JAN. 2024

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Construction work of 4-laning of Shahganj bypass end to Badi (Package-IV) of NH-146B from design km 102.000 to design km 142.357 (Design Length 40.357 km) under NH(O) in the State of Madhya Pradesh on Hybrid Annuity Mode.

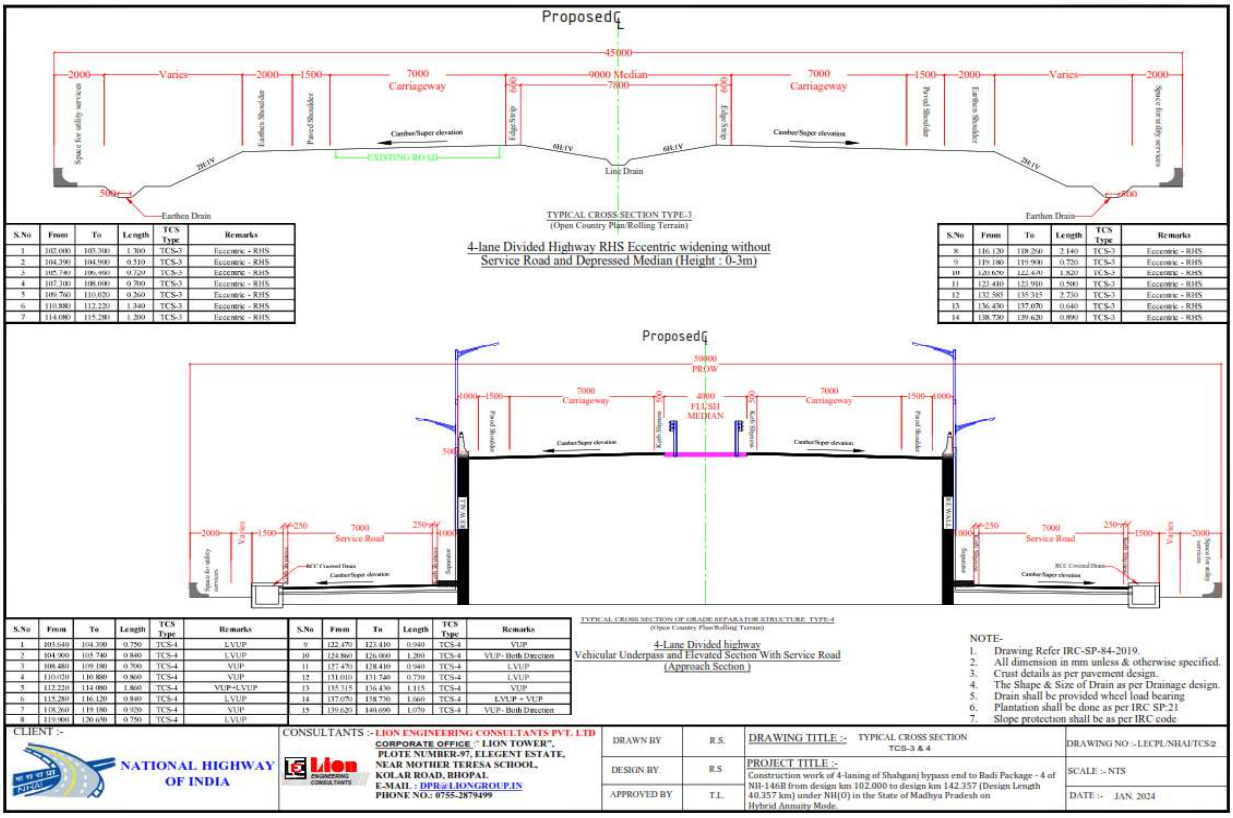

S.No	From	To	Length	TCS Type	Remarks
1	102.000	103.300	1.300	TCS-3	Eccentric - RHS
2	104.390	104.900	0.510	TCS-3	Eccentric - RHS
3	105.740	106.460	0.720	TCS-3	Eccentric - RHS
4	107.300	108.000	0.700	TCS-3	Eccentric - RHS
5	109.760	110.020	0.260	TCS-3	Eccentric - RHS
6	110.880	112.220	1.340	TCS-3	Eccentric - RHS
7	114.080	115.280	1.200	TCS-3	Eccentric - RHS

S.No	From	To	Length	TCS Type	Remarks
8	116.120	118.260	2.140	TCS-3	Eccentric - RHS
9	119.180	119.900	0.720	TCS-3	Eccentric - RHS
10	120.650	122.470	1.820	TCS-3	Eccentric - RHS
11	123.410	123.910	0.500	TCS-3	Eccentric - RHS
12	132.585	135.315	2.730	TCS-3	Eccentric - RHS
13	136.470	137.070	0.640	TCS-3	Eccentric - RHS
14	138.730	139.620	0.890	TCS-3	Eccentric - RHS

S.No	From	To	Length	TCS Type	Remarks
1	103.640	104.390	0.750	TCS-4	LVUP
2	104.900	105.740	0.840	TCS-4	LVUP
3	108.480	109.180	0.700	TCS-4	VUP
4	110.020	110.880	0.860	TCS-4	VUP
5	112.220	114.080	1.860	TCS-4	VUP+LVUP
6	115.280	116.120	0.840	TCS-4	LVUP
7	118.260	119.180	0.920	TCS-4	VUP
8	119.900	120.650	0.750	TCS-4	LVUP

S.No	From	To	Length	TCS Type	Remarks
9	122.470	123.410	0.940	TCS-4	VUP
10	124.860	126.060	1.200	TCS-4	VUP - Both Direction
11	127.470	128.410	0.940	TCS-4	LVUP
12	131.010	131.740	0.730	TCS-4	LVUP
13	135.315	136.430	1.115	TCS-4	VUP
14	137.070	138.730	1.660	TCS-4	LVUP + VUP
15	139.620	140.690	1.070	TCS-4	VUP- Both Direction

NOTE-
1. Drawing Refer IRC-SP-84-2019.
2. All dimension in mm unless & otherwise specified.
3. Crust details as per pavement design.
4. The Shape & Size of Drain as per Drainage design.
5. Drain shall be provided wheel load bearing.
6. Plantation shall be done as per IRC SP:21
7. Slope protection shall be as per IRC code

CLIENT :- NATIONAL HIGHWAY OF INDIA

CONSULTANTS :- LION ENGINEERING CONSULTANTS PVT. LTD
CORPORATE OFFICE " LION TOWER", PLOTE NUMBER-97, ELEGENT ESTATE, NEAR MOTHER TERESA SCHOOL, KOLAR ROAD, BHOPAL
E-MAIL :- DPR@LIONGROUP.IN
PHONE NO.: 0755-2879499

DRAWN BY	R.S.	DRAWING TITLE :- TYPICAL CROSS SECTION TCS-3 & 4	DRAWING NO :- LECPL/NHAI/TCS/2
DESIGN BY	R.S.	PROJECT TITLE :- Construction work of 4-laning of Shahganj bypass end to Badi Package - 4 of NH-146B from design km 102.000 to design km 142.357 (Design Length 40.357 km) under NH(O) in the State of Madhya Pradesh on Hybrid Annuity Mode.	SCALE :- NTS
APPROVED BY	T.L.		DATE :- JAN. 2024

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161 79(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Construction work of 4-laning of Shahganj bypass end to Badi (Package-IV) of NH-146B from design km 102.000 to design km 142.357 (Design Length 40.357 km) under NH(O) in the State of Madhya Pradesh on Hybrid Annuity Mode.

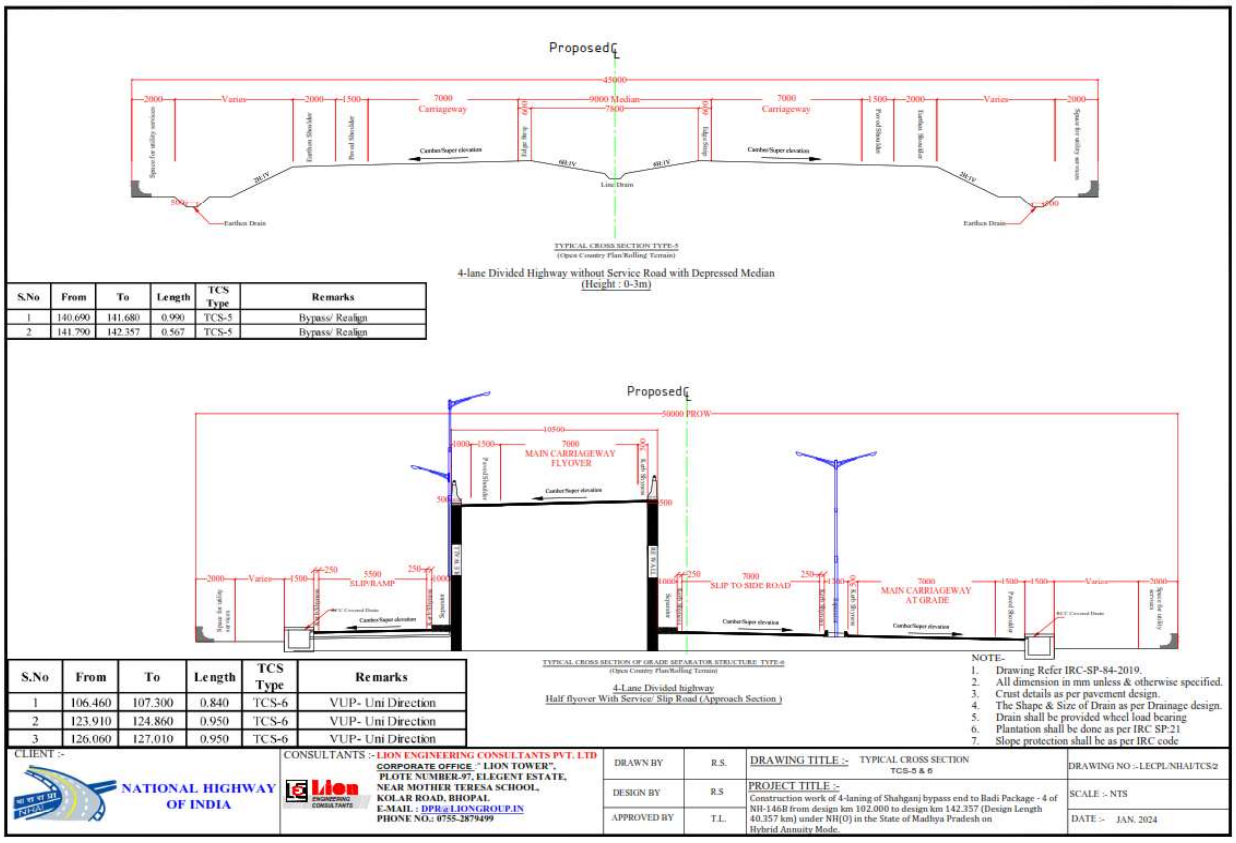

S.No	From	To	Length	TCS Type	Remarks
1	140.690	141.680	0.990	TCS-5	Bypass/ Realign
2	141.790	142.357	0.567	TCS-5	Bypass/ Realign

S.No	From	To	Length	TCS Type	Remarks
1	106.460	107.300	0.840	TCS-6	VUP- Uni Direction
2	123.910	124.860	0.950	TCS-6	VUP- Uni Direction
3	126.060	127.010	0.950	TCS-6	VUP- Uni Direction

NOTE-
1. Drawing Refer IRC-SP-84-2019.
2. All dimension in mm unless & otherwise specified.
3. Crust details as per pavement design.
4. The Shape & Size of Drain as per Drainage design.
5. Drain shall be provided wheel load bearing
6. Plantation shall be done as per IRC SP:21
7. Slope protection shall be as per IRC code

CLIENT :- NATIONAL HIGHWAY OF INDIA

CONSULTANTS :- LION ENGINEERING CONSULTANTS PVT. LTD
CORPORATE OFFICE :" LION TOWER", PLOTE NUMBER-97, ELEGENT ESTATE, NEAR MOTHER TERESA SCHOOL, KOLAR ROAD, BHOPAL
E-MAIL : DPR@LIONGROUP.IN
PHONE NO.: 0755-2879499

DRAWN BY	R.S.	DRAWING TITLE :- TYPICAL CROSS SECTION TCS-5 & 6	DRAWING NO :- LECPL/NHAI/TCS/2
DESIGN BY	R.S.	PROJECT TITLE :- Construction work of 4-laning of Shahganj bypass end to Badi Package - 4 of NH-146B from design km 102.000 to design km 142.357 (Design Length 40.357 km) under NH(O) in the State of Madhya Pradesh on Hybrid Annuity Mode.	SCALE :- NTS
APPROVED BY	T.L.		DATE :- JAN. 2024

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Construction work of 4-laning of Shahganj bypass end to Badi (Package-IV) of NH-146B from design km 102.000 to design km 142.357 (Design Length 40.357 km) under NH(O) in the State of Madhya Pradesh on Hybrid Annuity Mode.

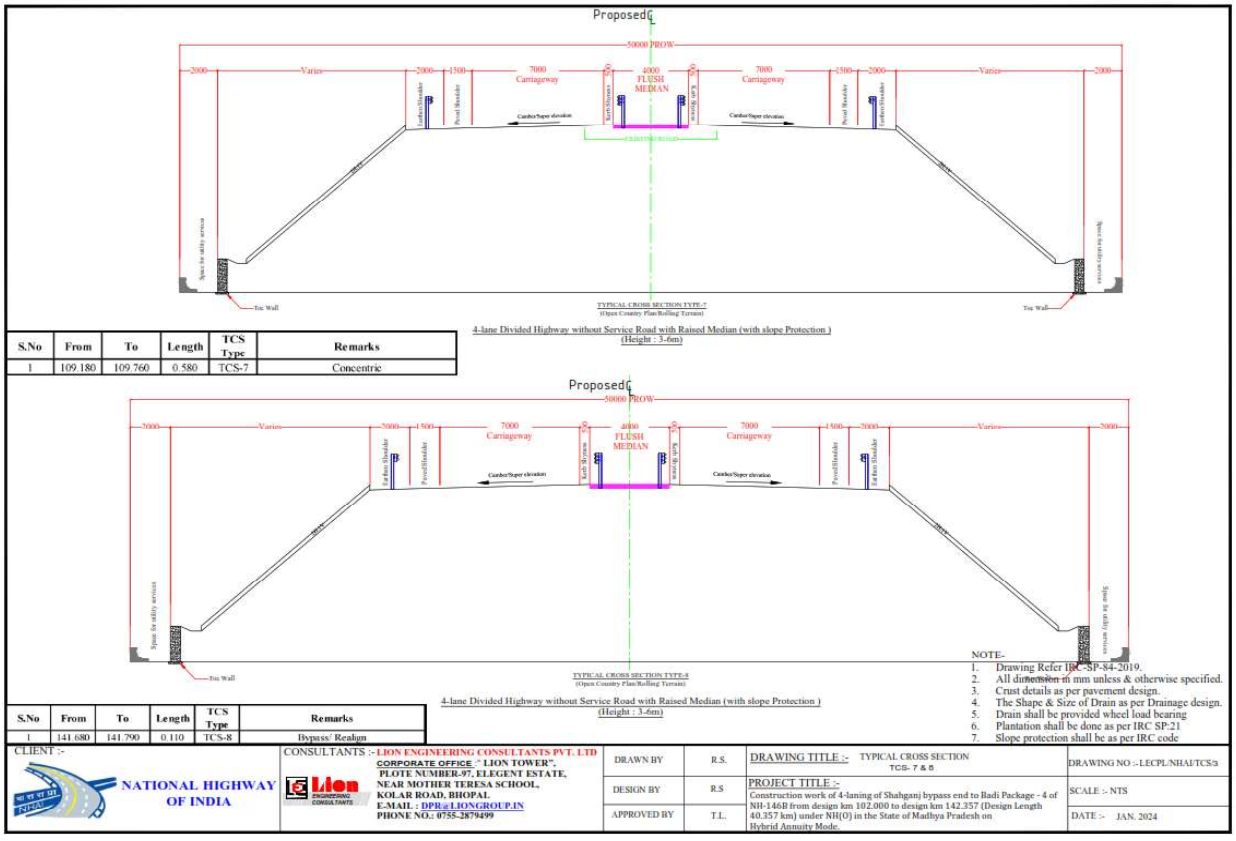

S.No	From	To	Length	TCS Type	Remarks
1	109.180	109.760	0.580	TCS-7	Concentric

S.No	From	To	Length	TCS Type	Remarks
1	141.680	141.790	0.110	TCS-8	Bypass/ Realign

NOTE-
1. Drawing Refer IRC-SP-84-2019.
2. All dimension in mm unless & otherwise specified.
3. Crust details as per pavement design.
4. The Shape & Size of Drain as per Drainage design.
5. Drain shall be provided wheel load bearing
6. Plantation shall be done as per IRC SP:21
7. Slope protection shall be as per IRC code

CLIENT :- NATIONAL HIGHWAY OF INDIA

CONSULTANTS :- LION ENGINEERING CONSULTANTS PVT. LTD
CORPORATE OFFICE :" LION TOWER",
PLOTE NUMBER-97, ELEGENT ESTATE,
NEAR MOTHER TERESA SCHOOL,
KOLAR ROAD, BHOPAL
E-MAIL : DPR@LIONGROUP.IN
PHONE NO.: 0755-2879499

DRAWN BY	R.S.	DRAWING TITLE :- TYPICAL CROSS SECTION TCS- 7 & 8
DESIGN BY	R.S	PROJECT TITLE :- Construction work of 4-laning of Shahganj bypass end to Badi Package - 4 of NH-146B from design km 102.000 to design km 142.357 (Design Length 40.357 km) under NH(O) in the State of Madhya Pradesh on Hybrid Annuity Mode.
APPROVED BY	T.L.	

DRAWING NO :- LECPL/NHAI/TCS/8
SCALE :- NTS
DATE :- JAN. 2024

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161 79(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Construction work of 4-laning of Shahganj bypass end to Badi (Package-IV) of NH-146B from design km 102.000 to design km 142.357 (Design Length 40.357 km) under NH(O) in the State of Madhya Pradesh on Hybrid Annuity Mode.

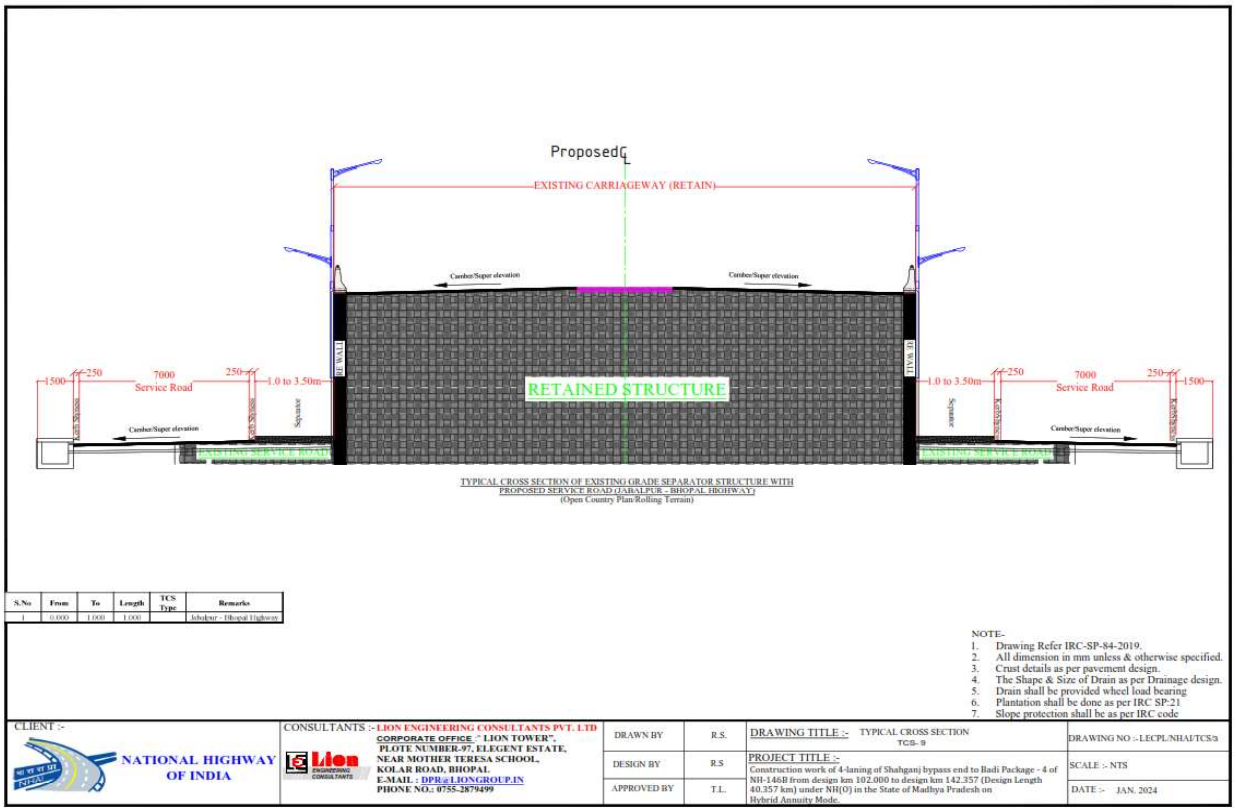

TYPICAL CROSS SECTION OF EXISTING GRADE SEPARATOR STRUCTURE WITH PROPOSED SERVICE ROAD (JABALPUR - BHOPAL HIGHWAY)
(Open Country Plan/Rolling Terrain)

S.No	From	To	Length	TCS Type	Remarks
1	0.000	1.000	1.000		Jabalpur - Bhopal Highway

NOTE-
1. Drawing Refer IRC-SP-84-2019.
2. All dimension in mm unless & otherwise specified.
3. Crust details as per pavement design.
4. The Shape & Size of Drain as per Drainage design.
5. Drain shall be provided wheel load bearing
6. Plantation shall be done as per IRC SP:21
7. Slope protection shall be as per IRC code

CLIENT :- NATIONAL HIGHWAY OF INDIA

CONSULTANTS :- LION ENGINEERING CONSULTANTS PVT. LTD
CORPORATE OFFICE : "LION TOWER", PLOTE NUMBER-97, ELEGENT ESTATE, NEAR MOTHER TERESA SCHOOL, KOLAR ROAD, BHOPAL
E-MAIL : DPR@LIONGROUP.IN
PHONE NO.: 0755-2879499

DRAWN BY	R.S.	DRAWING TITLE :- TYPICAL CROSS SECTION TCS- 9	DRAWING NO :- LECPL/NHAI/TCS/9
DESIGN BY	R.S	PROJECT TITLE :- Construction work of 4-laning of Shahganj bypass end to Badi Package - 4 of NH-146B from design km 102.000 to design km 142.357 (Design Length 40.357 km) under NH(O) in the State of Madhya Pradesh on Hybrid Annuity Mode.	SCALE :- NTS
APPROVED BY	T.L.		DATE :- JAN. 2024

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

SCHEDULE –C
(See Clause 2.1)
PROJECT FACILITIES

1. Project Facilities

The Concessionaire shall construct the project facilities in accordance with the provisions of this agreement. Such Project facilities shall include:

- **a)** Toll Plaza
- **b)** Road side furniture
  - i. Kilometer and Hectometer Stones
  - ii. Traffic Signs
  - iii. Overhead Signs
  - iv. Road Marking
  - v. Road Delineators
  - vi. Reflective Pavement Markers & Solar Studs
  - vii. Traffic Impact Attenuators
  - viii. Boundary wall and Fencing
- **c)** Operation and Maintenance centers
- **d)** Way side Amenities / Service Areas
- **e)** Truck lay-byes
- **f)** Bus Bay and Bus shelter
- **g)** Pedestrian Facilities
- **h)** Highway Lighting
- **i)** Rainwater Harvesting
- **j)** Environmental Management Plan
- **k)** Land Scaping and Tree Plantation
- **l)** Highway Patrol Units
- **m)** Emergency medical services
- **n)** Crane Service

2. Project Facilities to be completed on or before project completion date have been described in Annexure-I of this Schedule-C.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS32307130516179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Annexure – I
(Schedule-C)
PROJECT FACILITIES

1. Project Facilities

The Concessionaire shall construct the Project Facilities described in this Annexure-I to form part of the Project Highway. The Project Facilities shall include:

- **a)** Toll Plaza
- **b)** Roadside furniture
  - i. Kilometer and Hectometer Stones
  - ii. Traffic Signs
  - iii. Overhead Signs
  - iv. Road Marking
  - v. Road Delineators
  - vi. Reflective Pavement Markers & Solar Studs
  - vii. Traffic Impact Attenuators
  - viii. Boundary wall and Fencing
- **c)** Operation and Maintenance centers
- **d)** Way side Amenities / Service Areas
- **e)** Truck lay-byes
- **f)** Bus Bay and Bus shelter
- **g)** Pedestrian Facilities
- **h)** Highway Lighting
- **i)** Rainwater Harvesting
- **j)** Environmental Management Plan
- **k)** Land Scaping and Tree Plantation
- **l)** Highway Patrol Units
- **m)** Emergency medical services
- **n)** Crane Service

Description of Project Facilities

Each of the Project Facilities is briefly described below:

1. Toll Plaza

Tolling system shall be provided in entire length of the project and the same is integrated with the adjoining packages. The Toll Plazas shall be provided as per NHAI **circular No. 17.5.82 dated 24/5/2021** and Schedule D. Minimum Lane requirement in the opening year are as follows.

Toll Plaza shall be provided confirming to **Clause 10.2 of IRC SP: 84:2019** at the following locations:

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(PradeepSep
Signature Not Verified
Digitally Signed.
Name: IPROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

S. No	Location of Toll Plaza (Km)		Direction (Entry: to highway, Exit: from Highway)	Minimum number of Toll Lan	
	Existing Chainages	Design Chainages		Entry	Exit
1	123+800	114+515	-	5	5

The Sub Items of toll Plaza are as follows: -

S.No.	Item	Number	Remarks
1	No. of toll lane	10	
2	Toll Booth complex	2	As per design to be fixed by DPR Consultant
3	weigh bridges	2	1 each on either side of Toll Plaza
4	electrical systems	Sufficient for all equipment placed on Toll Plaza and for future expansion	
5	Highway Nest with toilet facility	2	1 in Each Direction after crossing the Toll Booth
6	Internet facility	2	Internet facility with 2 different telecom operators as per extent IHMCL/NHAI guidelines.

Note:

(i) The Toll Plaza shall be constructed as per Manual (Schedule D) considering the modification as per **NHAI Circular NHAI/Policy Guidelines/Management of Toll Plaza/2021 Policy Circular No. 17.5.82 dated 24th May, 2021.** However, the layout as mentioned in Schedule-C shall be followed.

(ii) Based on the toll lanes as given above, toll Booth complex, weigh bridges, electrical systems, and all other facilities required/ mentioned in manual shall be provided as per specification mentioned in Schedule D

(iii) No. of toll lane specified above are to be provided. The Concessionaire shall design and provide toll lane as per Manual (Schedule D) & NHAI Circular NHAI/Policy Guidelines/Management of Toll Plaza/2021 Policy Circular No.17.5.82 dated 24th May, 2021 subject to as specified above.

(iv) All Toll Lanes to be equipped with Hybrid ETC equipment's as per **NHAI/Policy Guidelines/Management of Toll Plaza/2021 Policy Circular No. 17.5.82 dated 24th May, 2021. (Clause 10.2 of IRC SP: 84:2019)**

(v) A separate Highway Nest with toilet facility for road users shall be provided near toll plaza location along with parking facility. One toilet block in each direction shall be provided. These toilet facilities shall follow CPWD specifications for sanitary ware items and fittings such as WC, wash basin, Wash basin-Under counter, Urinal flat back, PVC Cistern, IWC Orissa Pan, Flush Value –CP, Wash Basin pillar cock-CP, Bib Cock—CP, Health Faucet, W/c Bib cock, Wash Basin angle cock. One WC shall be provided for specially challenged persons.

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

(vi) Point of Sale (POS) with card swapping machines shall be provided.

Signature Not Verified
Digitally Signed
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

(vii) Provide Lane markings and Traffic Signs as per IRC: SP: 84-2019, IRC 35 and IRC 67 (**Clause 10.8 &10.9 of IRC: SP:84-2019)**

(viii) Solar panels shall be erected over the either on FOB or over Toll Plaza / Admin building to generate green energy. Same shall be utilized for toll plaza lighting and other energy

requirement within toll plaza area along with conventional lighting. All Charges/cost of solar panels, conventional electricity and ancillary infrastructure shall be borne by Concessionaire.

(ix) The Concessionaire shall provide Chain link fencing at the ROW edges, Electrical connection, Water boring connections approved by the Authority. The Concessionaire shall be responsible for bearing the cost of procuring the electrical connection and water connections for the toll plaza.

(x) Medium speed Weigh in Motion (MSWIM) devices shall be provided in all toll lanes at Toll Plaza Location. In addition to MSWIM, Static weigh Bridge (SWBs) shall be provided on each direction as per manual. **(Clause 10.6 of IRC: SP:84-2019)**

(xi) Provide Impact Attenuators on Toll Plaza islands in the direction of traffic. Impact attenuators shall be self-restoring confirm to section 10.6 of IRC SP 99 i.e., Manual of Specifications and Standards for Expressways. **(Clause 9.6 of IRC: SP:84-2019)**

(xii) Provide Staircase on either side of the FoB at Median Island location by widening the island appropriately.

2. Roadside furniture

2.1. Kilometer and Hectometer Stones (Clause No. 12.3 of IRC: SP:84-2019)

S.No.	Item	Number	Remarks
1	**Kilometer Marker/ Stones**	66	The KM/ Hectometer stones/ marker can be Concrete/ Stones and shall be placed on both outer side of the earthen shoulder. In case KM/ Hectometer marker are to be fixed on separator between Main Carriageway & Service Road then these should be fixed as reflective signs. In case of Access Control Highway/ Expressway, KM/ Hectometer marker should be fixed as reflective signs. Km/ Hectometer stones are required to provide on main carriageway and Service Road, both if continuous service road is provided throughout project length (Service Road length is more than 1 Km).
2	**Hectometer Marker/ Stones**	322	
3	**Fifth km stone**	16	

Note: It is clarified here that the above requirement is minimum only and the may vary at site, which shall be as per design of the Concessionaire and shall be subjected to approval of IE/NHAI and any increase in number or change in locations shall not constitute COS.

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Traffic Signs (Clause 9.2, IRC: SP:84-2019)

Traffic Signs include roadside signs, overhead signs and kerb mounted signs etc. shall be provided along the entire Project Highway and on all Side, Roads joining the main

carriageway/service road. A QR code shall be marked on back of each sign as per IRC 67. **(Clause 9.2, IRC:SP:84-2019)**

All signs shall be of Micro Prismatic Grade Sheeting Corresponding to Class C sheeting as per ASTM D 4956 Type VIII, IX and XI. **(Clause 9.2.3, IRC:SP:84-2019)**

All shoulder mounted signs shall be supported on GI Pipes. Overhead Signs shall be placed on a structurally sound gantry or cantilever structure made of GI pipes. **(Clause 9.2.4, IRC:SP:84-2019)**

On multi lane roads (6 lanes or above), signs shall be mounted overhead. **(Clause 4.6, IRC 67-2022)**

The siting of signs shall confirm to Table 4.1 and Fig 4.1 of IRC 67 **(Clause 4.7, IRC:SP:84-2019)**. The two successive signs shall be placed at a minimum distance of 0.6 x V metre (V is design speed in Kmph). **(Clause 4.8, IRC:SP:67-2022)**

The overhead gantry signs shall be placed as given below:

S.No.	Item	Carriageway (Left, Right, Both)
1	Overhead Gantry signs	
a	Start of Project	Both
b	End of project	Both
c	Toll plaza location on both side	Both
2	Overhead Cantilever Gantry signs	
a	At all major locations of crossroads i.e., NH, SH, MDR (start of grade separated structure/at grade interchange)	Either left or right
b	At major trauma center, roads leading to religious places or any other important location	Both sides
3.	Double/Butterfly Cantilever	NA

The detailed minimum number of signages indicating places, direction, distances, and other features shall be marked on the alignment plan and submitted, which are as mentioned below.

S.No.	Road Signs	Number	Remarks
I	**Mandatory/Regulatory**		
1	Stop signs	68	
2	Give Way Signs	11	
3	Prohibitory signs		
4	No Parking signs		
5	No Stopping signs		
6	Speed Limit signs (Circular)	5	
7	Speed Limit signs (Vehicle Type)	10	
8	Vehicle Control signs	34	

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003CSP India v3.0-HS23071305161179(Pradeep)
Signature Not Verified
Digitally Signed
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

S.No.	Road Signs	Number	Remarks
9	Restriction Ends sign	-	
10	Compulsory Direction Control and other signs	52	
II	**Cautionary/Warning**		
1	Left/Right Curve	30	
2	Left / Right Curve with side road	-	
2	Right/Left Hairpin Bend	-	
3	Right/Left Reverse Bend	-	
4	Series of Bends	-	
5	270 Degree Loop	-	
6	Side Road	14	
7	Y-intersection	-	
8	Cross Road	20	
9	Roundabout	-	
10	Traffic Signals	-	
11	T-Intersection	30	
12	Major Road Ahead	14	
13	Staggered Inter-section	-	
14	Merging Traffic Ahead	36	
15	Narrow Road Ahead	-	
16	Road Widens	-	
17	Narrow Bridge Ahead	-	
18	Steep Ascent/Descent	-	
20	Reduced Carriageway	-	
21	Start /End of Dual Carriageway	-	
23	Gap in Median	2	
24	Pedestrian Crossing	38	
25	Pedestrian crossing with backing board	-	
26	School Ahead	6	
27	Built Up Area	4	
28	Two Way Operation (on main carriage way /service road	-	
29	Two Way Traffic on Cross Road Ahead	-	
30	Danger Warning Sign	-	
31	Deaf or Blind Persons Likely on Road Ahead	-	
32	Cycle Crossing	-	
33	Cycle Route Ahead (Warning for Cycles on road ahead)	-	
34	Dangerous Dip	-	
35	Speed Breaker	68	
36	Rumble Strip	35	
37	Rough Road	-	
38	Dangerous Ditch	-	
39	Slippery Road	-	
40	Slippery Road because of Ice	-	
41	Opening or Swing Bridge	-	
42	Overhead Cable	-	
43	Play Ground Ahead	-	
44	Quay Side or River Bank	-	

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep)

Signature Not Verified
Digitally Signed
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

S.No.	Road Signs	Number	Remarks
45	Sudden Side Winds	-	
46	Tunnel Ahead Warning	-	
47	Falling Rocks	-	
48	Cattle Crossing	-	
49	Wild Animals likely to be on Road Ahead	-	
50	Queues Likely Ahead	-	
51	Low flying Air Craft	-	
52	Unguarded Railway Crossing	-	
53	Guarded Railway Crossing	-	
54	Crash prone area ahead	-	
55	U- Turn	-	
III	**Chevron Signs**		
1	Single Chevron	124	
2	Double Chevron	-	
3	Triple Chevron	-	
IV	**Object Hazard Marker Sign**		
1	Left /Right side Object Hazard Marker	102	
2	Two-way Object Hazard Marker	38	
V	**Informatory/Guide**		
1	Direction and Place Identification signs	15	
2	Stack Type Advance Direction Sign (Shoulder Mounted)	51	
3	Stack Type Advance Direction Sign with cautionary / regulatory signs (Shoulder Mounted)	-	
4	Map Type Advance Direction Sign (Shoulder Mounted)	-	
5	Map Type Advance Direction Sign for roundabout (Shoulder Mounted)	-	
6	Flag Type Direction Sign	10	
7	Reassurance Sign	-	
8	Place Identification Sign	5	
9	Truck Lay -By	-	
10	Toll Booth Ahead	4	
11	Weigh Bridge Ahead	-	
12	Shoulder Mounted Sign in Advance of a Grade Separated Junction/ Interchange	12	
13	Expressway Sign	-	
14	Gantry Mounted advance Direction Sign Ahead of a Flyover in Urban/City Roads	12	Instead of continuous sign board, Separate Signs shall be provided for each location
15	Gantry Mounted advance Direction Sign Ahead of a Grade Separated Junction	-	
16	Gantry Mounted advance Direction Sign Ahead of a At Grade Intersection	-	
17	Gantry Mounted Advance Direction Sign for Interchange	-	
18	Cantilever Gantry Mounted Advance Direction Sign for Interchange	-	
19	Lane Dedicated Gantry Sign	-	
20	Definition/Supplementary Plates	-	
21	Tourism Related Sign	-	

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003.CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

S.No.	Road Signs	Number	Remarks
22	Tourist Destination Direction Information Signs Without Photograph	-	
23	Tourist Destination Direction Information Signs With Photograph	-	
24	Finger Destination direction Information Sign for Pedestrians	-	
25	Tourist Map Information Sign	-	
26	Boundary Sign at Entrance to a City/Place	-	
27	Boundary Sign at Entrance to a Tourist Destination	-	
VI	**Facility Information signs**		
1	Eating Place	-	
2	Light Refreshment	-	
3	Resting Place	-	
4	First Aid Post	-	
5	Toilet	-	
6	Filling Station (Fuel Pump)	18	
7	Hospital	-	
9	U-Turn Ahead	42	
10	Pedestrian Subway	-	
11	Police Station		
12	Picnic Site	-	
13	Repair Facility	-	
14	Railway Station/Metro Station/Monorail Station	2	
15	Industrial Area	-	
16	Cycle Rickshaw Stand	-	
17	Taxi Stand	-	
18	Auto Rickshaw Stand	-	
19	Home Zone	-	
20	Camp Site	-	
21	Airport	-	
22	Golf Course	-	
23	National Heritage	-	
24	No Through Road	-	
25	No Through Side Road	-	
26	Toll Road Ahead	2	
27	Guide Sign on Toll Lane Portal	-	
28	Country Border	-	
29	Entry Ramp for Expressway	-	
30	Exit Ramp for Expressway	-	
31	Expressway Symbol	-	
32	End of Expressway	-	
33	Bus Stop	21	
34	Bus Lane	-	
35	Contra Flow Bus Lane	-	
36	Cycle Lane	-	
37	Contra Flow Cycle Lane	-	

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

S.No.	Road Signs	Number	Remarks
38	Holiday Chalets	-	
39	Emergency Exit	-	
VII	**Other Useful Information Signs**		
1	Signs For Persons With Disabilities	-	
2	International symbol of Accessibility	-	
3	Parking Information	-	
4	Parking Areas	-	
5	Ramped Entrance to Subway/Over Bridge	-	
6	Telephone Facilities	-	
7	Toilet Facilities	2	
8	Way Finding	-	
9	Parking Signs	-	
10	Auto Rickshaw Parking	-	
11	Cycle Parking	-	
12	Cycle Rickshaw Parking	-	
13	Scooter and Motorcycle Parking	-	
14	Taxi Parking	-	
15	Park and Ride	-	
16	Parking Restrictions Signs for Traffic Management	-	
17	Flood Gauge Sign	2	At MJB
VIII	**Route Maker Signs**		
1	State Highway Route Marker Sign	-	
2	National Highway Route Marker Sign	2	
3	Asian Highway Route Marker Sign	-	
4	Expressway Route Marker Sign	-	

Note: The locations of the placement of signages shall be finalized in consultation with IE/ NHAI, as per site requirement. The signage shall be provided as per MoRTH Guideline no. RT-25035/07/2023-RS (Part)(221534) dated 20.07.2023. It is clarified here that the above requirement is minimum only and the actual plan for road signage shall be as per design of the Concessionaire and shall be subjected to approval of IE/NHAI and any increase in number or change in locations shall not constitute COS.

2.3 Road Marking (Clause 9.2, IRC:SP:84-2019)

Road Markings shall be Hot applied thermoplastic materials with reflectorized beads to achieve visibility confirming to clause 2.7.2 of IRC 35. The cold applied plastics pavement markings shall be used for School Zone Markings, Audible Raised Profile Edge Lines and Block Markings (BM 21/02/03). (Clause No. 2.2 IRC: 35)

The detailed minimum requirement of the road marking on the project shall be as mentioned below: -

Signature Not Verified
Digitally Signed,
Name: HyperPKI eMudhra CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed,
Name: PROXKey v1.0 WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

S.No.	Item	Unit		Remarks
		Length (M)	Number	
1	Longitudinal Marking	479702	-	
2	Transverse Marking	1205	-	
3	Hazard Marking	4500	30	
4	Block Marking	-	46	
5	Arrow Marking	-	1284	
6	Directional Marking	-	20	
7	Facility Marking	-	-	
8	Center Line	-	-	
9	Traffic Lane Lines	279002	-	
10	No Overtaking Lines	-	-	
11	Warning Lines	-	-	
12	Border or Edge Lines	166584	-	
13	Longitudinal Markings for Undivided Roads	107340	-	
14	Longitudinal Markings for divided Roads	365222	-	
15	Longitudinal Markings for Ramps/Slip Roads/One Way Streets	14660		
16	Stop Line	-	20	
17	Give Way Lines	-	3	
18	Diagonal Markings	-	-	
19	Chevron Markings	4500	30	
20	Continuity Line	-	85	
21	Word Messages	-	0	
22	Lane Change	-	34	
23	Merging/Diverging Markings	2475	33	
24	Hatch Markings	-	-	
25	RaisedProfileEdgeLines	-	-	
26	Lane Reduction/Narrowing Situations and Transitions(lane Balancing)	-	-	
27	Directional Arrows	5	-	
28	Mandatory Turn Arrows	5	254	
29	Guidance Arrows	5	-	
30	Deflection Arrows	5	-	
31	Bifurcation Arrows	16	33	
32	Arrows on Side Road Approaches	5	320	
33	Arrows on Main Road Approaches	5	677	
34	Word Messages	-	-	

Signature Not Verified
Digitally Signed by
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed by
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

S.No.	Item	Unit		Remarks
		Length (M)	Number	
35	Yellow Box Markings	-	-	
36	Ghost Island	-	-	
37	Marking For Speed Breakers	-	4	
38	Pedestrian Crossing	-	40	
39	Markings when highway passes through settlement fig 9.4 of IRC SP 84/87	-	-	
40	Transverse Bar Markings	-	4	
41	Busbay Marking	-	-	
42	Truck Lay-by Markings	-	2	
43	Toll Plaza Marking	-	-	
44	School Zone Markings	-	-	
45	Object Markings within Carriageway	-	-	
46	Objects Markings Adjacent to Carriageway	-	-	
47	i. Subway Piers,Abutments Culverts Head Walls, Concrete Barrier	-	-	
48	ii. Electrical Poles	-	-	
49	iii. Guard Rails	-	-	
50	iv. Trees	-	-	
51	v. Kerbs	49100	-	
52	Directional Marking as per Annexure :A6	-	-	-
53	Facility Marking as per Annexure :A7 of IRC 35	-	-	-

Note: The locations of the marking shall be finalized in consultation with IE /NHAI, as per site requirement as per the provisions contained in the IRC: SP:84:2019. It is clarified here that the above requirement is minimum only and actual layout of road marking shall be as per design of the Concessionaire and shall be subjected to approval of IE/NHAI and any increase in number/length or change in locations shall not constitute COS.

2.4 Road Delineators (Clause 9.4, IRC SP:84-2019)

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS32307130516179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

S.No.	Item	Number/ Length (m)	Remarks
1	Roadway Indicators	148 No.	On entire project highway on shoulders except on section of Project highways with crash

S.No.	Item	Number/ Length (m)	Remarks
			barrier on shoulder and other section as specified by IE.
2	Median Marker on Median/RCC Barrier	10000 No.	On complete median and on RCC Crash barrier and other section as specified by IE.
3	Object Markers	-	
4	Flexible Object Markers i. On Metal Beam Barrier ii. On Toll Booth/Toll Island iii. On Entry/Exit of Tunnel iv. On Exit from Main carriageway	-	Nil
5.	Solar Blinkers on Median Opening, on exit from main carriageway and traffic islands of grade separated intersections	107Nos	On median opening, exit from main carriageway, cross road, junctions or as specified by IE.

Note: The locations of the Road Delineator shall be finalized in consultation with IE/NHAI, as per site requirement. It is clarified here that the above requirement is minimum only and actual plan for Road delineators shall be as per design of the Concessionaire and shall be subjected to approval of IE/NHAI and any increase in number/length or change in locations shall not constitute COS.

2.5 Reflective Pavement Markers & Solar Studs (Clause 9.5 of IRC:SP:84-2019)

The Prismatic Retro-Reflective type confirming to ASTM D-4280 Pavement Markers & Solar Power Studs on Highway shall be provided in accordance with Schedule - D.

S.No.	Item	Number	Location	Remarks
A. - For 4 Lane Projects				
1	White Colour one coloured face Road Studs	-	Traffic lane line & center of carriageway	Uni-directional carriageway
2	Red Colour one coloured face Road Studs	11560	Left hand edge of the carriageway, entry to truck lay bye / bus bay, start of service road, chevron/diagonal markings on gorge	
3	Yellow / Amber Colour one coloured face Road Studs	6432	Median side edge line, zebra crossing	
4	Green Colour one coloured face Road Studs	1445	Lay byes, left hand side of the carriageway in case of multi-lane divided carriageways, crossable continuous line like in acceleration/deceleration lanes involving lane changing	

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619(Pradeep)
Signature Not Verified
Digitally Signed
Name: PROXKey v 3.0-WD05611496(WD PROXKey)
Date: 29 Aug 2024 20:00:48

Note: The locations of the Road Studs shall be finalized in consultation with IE/NHAI, as per site requirement. It is clarified here that the above requirement is minimum only and actual plan for Road Studs shall be as per design of the Concessionaire and shall be subjected to approval of IE/NHAI and any increase in number or change in locations shall not constitute COS.

2.6 Traffic Impact Attenuators (Clause 9.6, IRC: SP:84-2019)

2.6.1 Provide Impact Attenuators in Gore Areas, it shall be self-restoring confirming to Clause 9.6, IRC: SP:84-2019 as under: -

S.No.	Item	Chainage / Number	Remarks
1	On flyover/grade separated structure at exit from main carriageway	103.62 104.88 106.44 108.48 110.02 112.28 115.3 118.26 119.9 122.48 123.94 127.47 131.01 135.38 137.07 139.64 42Nos.	At all locations of entry from Main Carriageway and as specified by IE.
2	On Island of Toll Plaza	9Nos.	On all traffic island
3	Any other location which Safety Hazard	-	

Note: The locations of the Traffic Impact Attenuators shall be finalized in consultation with IE/NHAI, as per site requirement. It is clarified here that the above requirement is minimum only and actual plan/locations shall be as per design of the Concessionaire and shall be subjected to approval of IE/NHAI and any increase in number or change in locations shall not constitute COS.

2.6.2 Providing End Terminals

Provide End Terminals P-4 type confirming to EN 1317-4 to Parapet Walls of Culverts, Structures ends for the safety of approaching traffic etc.

S.No.	Item	Chainage / Number	Remarks
1	Culvert Ends	At all locations of Culvert & Structures.	Shall be as specified by IE.
2	Structures Ends		
3	Any other location which Safety Hazard		

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey V 3.0-WD056114961(M/S PROXKey)
Date: 29-Aug-2024 20:06:49

Note: The locations of the End terminals shall be finalized in consultation with IE/NHAI, as per site requirement. It is clarified here that the above requirement is minimum only and actual plan/locations shall be as per design of the Concessionaire and shall be subjected to approval of IE/NHAI and any increase in number or change in locations shall not constitute COS.

2.7 Boundary wall and Fencing.

Boundary wall shall be provided along the entire length on either side (including transverse requirements at structure locations) as per the detail given below in accordance with IRC: SP: 84. Road boundary walls shall be provided at the boundary on both sides of the right of way available under the control of the Authority, except at ingress and egress points. The boundary walls shall be of reinforced cement concrete as per figure enclosed as Annexure A.

At all CD structure locations, the boundary wall shall be discontinued by turning and joining it with the wing/return wall to allow crossing through these structures during dry seasons.

In case Chain-link fencing, provide detailed drawings as Annexure A.

3. Operation and Maintenance centers.

There shall be operation and maintenance center(s) as per Clause 12.15 of Schedule-D, either near the toll plaza location or at any other location along the Project Highway, as identified by the Concessionaire. The minimum land for O & M center shall be 2000 sq.m and shall be acquired by the Concessionaire at his own cost and risk. Dedicated operation and maintenance center shall be provided in accordance with Schedule D.

4. Way side Amenities / Service Areas/Rest Area

S. No	Item	Chainage (Km)	Side	Remarks
Nil				

The Site needs to levelled/ graded for the whole of Way side Amenities area and boundary wall of the height of 1.5m shall be constructed along the periphery of the area.

5. Truck lay-byes: (Clause No. 12.6 of IRC:SP:84-2019)

5.1 The truck lay-bye shall be provided at below given location and as per the design mentioned in Schedule-D.

Sr. No.	Design Chainage	Side	Remarks
Nil			

5.2 Toilet block along with Janitor room on each Truck Lay bye shall be provided. The toilet block shall consist of at least 1 block for bathing, at least 2 fixtures each for urinals, WC and wash basin. There shall be 24-hour lighting facility in the toilet block. These toilets facilities must be functional round the clock including proper maintenance. For arrangement of water, 1 No. of boring along with water pump shall be provided to keep the toilet clean. For upkeep and maintenance of Toilet, 3 Safai wale (1 in each 8-hour shift) shall be engaged and is in the scope throughout contract period. The charges and necessary arrangement for procuring electric connection shall be borne by the Concessionaire.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD0611408(Pradeep PROXKey)
Date: 29-Aug-2024 20:06:49

5.3 Truck Lay Bye Pavement:

Provide pavement composition (Flexible/Rigid/ Paver Blocks) as follows:

NIL

6. Bus Bay and Bus shelter: (Clause No. 12.7 of IRC:SP:84-2019)

Provision of Busbay and bus shelter on highways as per **IRC 80: 2022** including paving of layby, signs, markings, speed calming measures, drainage, lighting etc., in builtup areas, intersections of NH/SH/MDR and roads leading to large settlements is as follows:

6.1. Bus Bays with tapers shall be provided along with passenger's shelters shall be constructed at the following locations:

Sr. No.	Design (Existing) Chainage (Km)		Entry Taper Length	Bus Bay Lenth	Exit Taper Length	Remark
	Left	Right				
Nil						

6.2. Kerb Side Bus Stop with Pedestrian shelter shall be provided at the following locations.

Sr. No.	Design Chainage (Km)		Pedestrian Shelter Length	Remark
	Left	Right		
1	105+120	105+400	30	
2	106+800	110+640	30	
3	110+300	112+830	30	
4	112+550	115+800	30	
5	115+530	118+860	30	
6	118+520	123+000	30	
7	122+750	125+750	30	
8	125+480	128+020	30	
9	127+820	131+500	30	
10	131+300	140+050	30	
11	139+800		30	

6.3 Bus Bay Pavement: Provide pavement composition (Flexible/Rigid/ Paver Blocks) as follows:

Nil

7. Pedestrian Facilities (Clause No. 9.8 of IRC: SP:84-2019)

Pedestrian Facilities shall be provided in accordance with the Manual of Specifications and Standards as referred to in Clause 9.8 of Schedule D and IRC 103 2022. This shall consist of footpaths (sidewalks), pedestrian guard rails and pedestrian crossing.

The details are as mentioned below:

Signature Not Verified
Digitally Signed by
Name: HyperPKI HYP2003 CSP
India v3.0-
HS2307130516179(Pradeep)

Signature Not Verified
Digitally Signed by
Name: PROXKey V 3.0-
WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

<table>
<tr><th>S.No.</th><th>Pedestrian facilities</th><th colspan="2">Chainage
From | To</th><th>Side</th><th>Remarks</th></tr>
<tr><td>1</td><td>Pedestrian guardrails shall be 150 mm from Carriageway/Paved Shoulder
i. Hazardous Locations on Straight Stretches
ii. At Junctions/Intersections
iii. Schools
iv. Bus Stop/Railway Stations
v. Overpass, Subway
vi. Central Reserve</td><td colspan="3">Nil</td></tr>
<tr><td>2</td><td>Footpath paving including fixing of Tactile pavers</td><td colspan="3">Nil</td></tr>
<tr><td>3</td><td>Pedestrian Crossing
i. With Zebra Marking
ii. With Tabletop Crossing
iii. At Intersections
iv. At Schools</td><td colspan="3">At Intersections
<table>
<tr><th>Sr. No.</th><th>Design Chainage (Km)</th><th>Side</th></tr>
<tr><td>1</td><td>102.335</td><td>LHS</td></tr>
<tr><td>2</td><td>103.800</td><td>LHS</td></tr>
<tr><td>3</td><td>103.975</td><td>RHS</td></tr>
<tr><td>4</td><td>105.750</td><td>LHS & RHS</td></tr>
<tr><td>5</td><td>106.150</td><td>LHS & RHS</td></tr>
<tr><td>6</td><td>106.380</td><td>RHS</td></tr>
<tr><td>7</td><td>106.500</td><td>RHS</td></tr>
<tr><td>8</td><td>106.630</td><td>RHS</td></tr>
<tr><td>9</td><td>108.230</td><td>LHS & RHS</td></tr>
<tr><td>10</td><td>109.260</td><td>LHS</td></tr>
<tr><td>11</td><td>112.500</td><td>RHS</td></tr>
<tr><td>12</td><td>114.420</td><td>LHS</td></tr>
<tr><td>13</td><td>116.930</td><td>LHS & RHS</td></tr>
<tr><td>14</td><td>117.835</td><td>LHS & RHS</td></tr>
<tr><td>15</td><td>121.330</td><td>LHS</td></tr>
<tr><td>16</td><td>124.935</td><td>LHS & RHS</td></tr>
<tr><td>17</td><td>125.000</td><td>LHS & RHS</td></tr>
<tr><td>18</td><td>125.310</td><td>LHS & RHS</td></tr>
<tr><td>19</td><td>125.610</td><td>LHS & RHS</td></tr>
<tr><td>20</td><td>126.120</td><td>LHS & RHS</td></tr>
<tr><td>21</td><td>133.190</td><td>LHS</td></tr>
<tr><td>22</td><td>134.680</td><td>RHS</td></tr>
<tr><td>23</td><td>138.370</td><td>LHS</td></tr>
<tr><td>24</td><td>138.410</td><td>RHS</td></tr>
<tr><td>25</td><td>142.230</td><td>LHS & RHS</td></tr>
</table>
<table>
<tr><th>Sr. No.</th><th>Design Chainage (Km)</th><th>Side</th></tr>
<tr><td>1</td><td>105.28</td><td>LHS & RHS</td></tr>
<tr><td>2</td><td>106.885</td><td>LHS</td></tr>
<tr><td>3</td><td>108.85</td><td>LHS</td></tr>
<tr><td>4</td><td>110.48</td><td>LHS & RHS</td></tr>
<tr><td>5</td><td>112.71</td><td>LHS & RHS</td></tr>
<tr><td>6</td><td>113.575</td><td>LHS & RHS</td></tr>
<tr><td>7</td><td>115.675</td><td>LHS & RHS</td></tr>
</table></td></tr>
</table>

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

S.No.	Pedestrian facilities	Chainage		Side	Remarks
		From	To		
		8	118.69		LHS & RHS
		9	120.275		RHS
		10	122.89		LHS & RHS
		11	124.4		LHS
		12	125.61		LHS & RHS
		13	126.54		LHS
		14	127.94		LHS & RHS
		15	131.395		RHS
		16	135.95		LHS & RHS
		17	137.52		LHS & RHS
		18	138.36		LHS
		19	139.93		LHS & RHS
		20	140.275		LHS
		21	142.357		LHS & RHS

8. Highway Lighting (Clause 12.5, IRC: SP:84-2019)

The street light poles shall be 1 piece, continuous-tapered, octagonal poles and shall be manufactured from one length of steel sheet, formed in continuous tapered tube, with one continuous arc-welded vertical seam. The minimum wall thickness for lighting poles shall not be less than 4 mm. The Bottom Diameter shall be minimum 175 mm. The Top Diameter shall be minimum 75 mm. The door on window of pole shall be antitheft. All electrical cable should be concealed. All electrical lighting fixers shall be LED. The fixtures shall be concealed except on poles. Lighting poles shall be fixed on outer side of steel/concrete barrier. The lighting shall be providing at the following locations:

S.No.	Lighting facilities	Chainage		Side	Lighting Source: Electricity Board/ Generator/ Solar
		From	To		
1	**Toll Plaza area:** The lighting in and around toll plaza, toll booths, office building, on the approach road, etc. shall be as per Section 12 of the Manual. In addition to at least two high mast light shall be provided on either side of toll plaza	114+380	114+650	BHS	Electricity Board
2	**Rest Areas:** The entire Rest areas shall be provided with lighting with average illumination to 40 Lux	Nil	Nil	Nil	Nil
3	**Truck lay-bye:** The entire area of truck lay-byes and 50m length of the project highway on its either side shall be illuminated at night to provide an average illumination of 40Lux. Suitable designed electric poles having IEsthetic	Nil	Nil	Nil	Nil

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

<table>
<tr><th rowspan="2">S.No.</th><th rowspan="2">Lighting facilities</th><th colspan="2">Chainage</th><th rowspan="2">Side</th><th rowspan="2">Lighting Source: Electricity Board/ Generator/ Solar</th></tr>
<tr><th>From</th><th>To</th></tr>
<tr><td></td><td>appeal and energy saving bulbs (LED) may be used to provide required illumination. Alternatively, photo voltaic lamps may be used</td><td></td><td></td><td></td><td></td></tr>
<tr><td rowspan="24">4</td><td rowspan="24">Bus Bay & bus shelter locations: The entire bus bay & bus shelter area shall be provided with Lighting (Average illumination of 40Lux.).</td><td colspan="2">105+120</td><td>LEFT</td><td>Electricity Board/Solar</td></tr>
<tr><td colspan="2">105+400</td><td>RIGHT</td><td>Electricity Board/Solar</td></tr>
<tr><td colspan="2">106+800</td><td>LEFT</td><td>Electricity Board/Solar</td></tr>
<tr><td colspan="2">110+300</td><td>LEFT</td><td>Electricity Board/Solar</td></tr>
<tr><td colspan="2">110+640</td><td>RIGHT</td><td>Electricity Board/Solar</td></tr>
<tr><td colspan="2">112+550</td><td>LEFT</td><td>Electricity Board/Solar</td></tr>
<tr><td colspan="2">112+830</td><td>RIGHT</td><td>Electricity Board/Solar</td></tr>
<tr><td colspan="2">115+530</td><td>LEFT</td><td>Electricity Board/Solar</td></tr>
<tr><td colspan="2">115+800</td><td>RIGHT</td><td>Electricity Board/Solar</td></tr>
<tr><td colspan="2">118+520</td><td>LEFT</td><td>Electricity Board/Solar</td></tr>
<tr><td colspan="2">118+860</td><td>RIGHT</td><td>Electricity Board/Solar</td></tr>
<tr><td colspan="2">122+750</td><td>LEFT</td><td>Electricity Board/Solar</td></tr>
<tr><td colspan="2">123+000</td><td>RIGHT</td><td>Electricity Board/Solar</td></tr>
<tr><td colspan="2">125+480</td><td>LEFT</td><td>Electricity Board/Solar</td></tr>
<tr><td colspan="2">125+750</td><td>RIGHT</td><td>Electricity Board/Solar</td></tr>
<tr><td colspan="2">127+820</td><td>LEFT</td><td>Electricity Board/Solar</td></tr>
<tr><td colspan="2">128+020</td><td>RIGHT</td><td>Electricity Board/Solar</td></tr>
<tr><td colspan="2">131+300</td><td>LEFT</td><td>Electricity Board/Solar</td></tr>
<tr><td colspan="2">131+500</td><td>RIGHT</td><td>Electricity Board/Solar</td></tr>
<tr><td colspan="2">139+800</td><td>LEFT</td><td>Electricity Board/Solar</td></tr>
<tr><td colspan="2">140+050</td><td>RIGHT</td><td>Electricity Board/Solar</td></tr>
<tr><td>5</td><td>Grade separated structures, interchanges, flyovers, underpasses (vehicular/ pedestrian) and Vehicle overpasses: Lighting requirement shall be as per section 12 of the manual. The top and underside of the grade separated structures including service road/ slip road, interchange area at the ground level up to 50m beyond the point from were flaring of the main carriageway takes place shall be provided with lighting. Also, on all legs of at grade interchange/ crossings the lighting shall be provided 50m beyond the point of Centre on all legs. The minimum illumination shall be 40 Lux., at the extreme edge of the Highway</td><td colspan="2"><table><tr><th colspan="2">Design Chainage (Km)</th><th>Side</th></tr><tr><th>From</th><th>To</th><th></th></tr><tr><td>103.52</td><td>104.4</td><td>BHS</td></tr><tr><td>104.78</td><td>105.76</td><td>BHS</td></tr><tr><td>106.34</td><td>107.3</td><td>BHS</td></tr><tr><td>108.38</td><td>109.12</td><td>BHS</td></tr><tr><td>109.90</td><td>110.88</td><td>BHS</td></tr><tr><td>112.18</td><td>114.04</td><td>BHS</td></tr><tr><td>115.2</td><td>116.08</td><td>BHS</td></tr><tr><td>118.16</td><td>119.2</td><td>BHS</td></tr><tr><td>119.8</td><td>120.64</td><td>BHS</td></tr><tr><td>122.38</td><td>123.32</td><td>BHS</td></tr><tr><td>123.84</td><td>127.01</td><td>BHS</td></tr><tr><td>127.37</td><td>128.34</td><td>BHS</td></tr><tr><td>130.91</td><td>131.74</td><td>BHS</td></tr><tr><td>135.28</td><td>136.4</td><td>BHS</td></tr><tr><td>136.97</td><td>138.73</td><td>BHS</td></tr><tr><td>139.54</td><td>140.69</td><td>BHS</td></tr><tr><td>0+000</td><td>1+000</td><td>BHS along the NH-45(Design Ch. 0+00 to 1+00</td></tr></table></td><td></td><td>Electricity Board/Solar</td></tr>
</table>

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep)

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

S.No.	Lighting facilities	Chainage		Side	Lighting Source: Electricity Board/ Generator/ Solar
		From	To		
6	**Built-up sections** on the project highway both in the median of main carriageway and on the service roads on both sides	Nil	Nil	Nil	Nil
7	**On Median Openings provide 1 no. high mast lighting of 25m height**	106.150		BHS	Electricity Board
8	**On Start and End Interchange provide 1 no. high mast lighting of 25m height each**	Nil	Nil	Nil	Nil
8	**On Major Bridges and its approaches higher than 3m**	109.120	109.900	BHS	Electricity Board

Note:

(i) The lighting shall be provided as locations defined above and as per the TCS provided in Schedule-B.

(ii) All lighting systems shall be maintained for the entire Maintenance period (The power consumption bill shall be borne by Concessionaire). Charges for procuring the connection shall be borne by the Concessionaire.

(iii) The lighting source indicated above is the primary source to be ensured by the Concessionaire. However, backup/standby arrangement with DG sets etc shall be ensured by the Concessionaire as per provisions of the IRC: SP: 84-2019.

(iv) Any increase/decrease up to 5 percent length from the length specified above shall not constitute a Change of Scope. Any additional length shall be dealt with in Change of Scope.

9. Rainwater Harvesting:

The provision of rainwater harvesting pits-Nil. Additionally, wherever urban drains are provided, which do not have a definite outfall for discharge of water, at such location one pit for rain water harvesting shall be provided along the side drains at the lowest point where the water stagnates.

10. Environmental Management Plan (Attach MOEF Mitigation Report in Schedule D)

The Concessionaire shall implement the Environmental Management plan & action Plan for undertaking possible mitigation measures in accordance with environmental clearance accorded by Ministry of Environment and Forests and climate change. The conditions & directions stipulated by the MOEF shall be complied by the Concessionaire/ concessionaire.

11. Landscaping and Tree Plantation (Section 11 of IRC SP 84-2019)

The Concessionaire shall plant trees and shrubs of required numbers and types at key appropriate locations within Right of Way and in the land earmarked by the Authority for afforestation as per Schedule D at the following areas.

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003-CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed,
Name: CPPXKey V3.0 WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Sl. No.	Types of Plantations	Location (Km)	Number of trees to be planted	Remarks
1	Shrubs	In median except Structures+ Frist row from side of drain	1 row of 333 plants for the median of 2-3 metre at every km. and 2 rows of 333 plants (staggered) for the median of 3 metre and more	Ornamental type plantation shall be provided
2	Land Scaping	O & M Centers, Vacant land parcels, lend within loops of flyovers, Toll Plaza building and surroundings Vacant space below the flyovers	Landscaping plans will be submitted by the Concessionaire/Concessionaire which shall include ornamental trees, decorative statues and landscaping	The number of Ornamental type plantation and other things shall be decided on the basis availability of land.
3	Plantations	Available open land within ROW	1 row of 333 plants on each side of project highway.	The trees in available ROW width preferably of local varieties like mango, Neem, Sheesham, Babul, Peepal etc. shall be planted.

The Concessionaire shall maintain the trees and shrubs in good condition during Contract period as per the Contract Agreement. It is clarified here that the above requirement is minimum only and actual plan shall be as per design of the Concessionaire and shall be subjected to approval of IE/NHAI and any increase in number/length of plantation or change in locations shall not constitute COS.

12. **Highway Patrol Units**

Highway Patrol units shall be established and operate at toll plaza location as per Schedule-D Clause 12.10 (strictly as per details mentioned in Annexure-C), which shall continuously patrol the highway in a stretch not exceeding 50 km (if the stretch is more than 50 km additional 1 number of patrol vehicle per 50 km or less shall be provided).

The vehicle shall be brand new with fuel, driver, and insurance all-inclusive for the entire contract period. Highway Patrol units shall be fitted with GPS and GSM based vehicle tracker system. Highway Patrol Vehicles shall be stationed on layby constructed on Project Highway @ every 20 km of each Toll Plaza. (Clause No. 12.10 IRC: SP:84-2019)

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

13. Emergency medical services

The Concessionaire shall, at its own cost, construct a medical aid post at each toll plaza with a minimum size of 5 x 5 sq.m with a toilet (to be used for the patients of minimum size of 3 x3 sq.m) and hand it over to the Authority, no later than 30 (thirty) days prior to PCOD/COD. The

Medical Aid Post(s) shall be deemed to be part of the project and shall vest in the Authority. Medical Aid Post shall be set up at Administrative Block with round-the-clock services for victims of accidents on the Project Highway.

One number Ambulance shall be provided in a stretch not exceeding 50 km (if the stretch is more than 50 km additional 1 number of ambulances per 50 km or less shall be provided). The Ambulance shall be brand new with fuel, driver, medical staff and insurance all-inclusive for the entire contract period. Ambulance fitted with GPS and GSM based vehicle tracker system shall be provided to be integrated with the Video Incident Detection System with ATMS, as per Schedule-D, Clause 12.11 (strictly as per details mentioned in Annexure-D), along with all necessary manpower (including paramedical staff), medicines, equipment's etc. and shall be maintained in an effective manner throughout the contract period starting from the appointed date. Ambulance shall be stationed on layby constructed on Project Highway @ every 20 km of each Toll Plaza. (Clause No. 12.11 IRC: SP:84-2019) & NHAI Circular NHAI/Incident Management/ 2021 Policy Circular No. 18.6/2021 dated 11th March 2021.

14. Crane Service:

Crane Service shall be provided on project highway, as specified in the manual Clause 12.12. One number crane shall be provided in a stretch not exceeding 50 km (if the stretch is more than 50 km additional 1 number of cranes per 50 km or less shall be provided). Crane having capacity of minimum 20T shall be made available. The crane shall be brand new with fuel, driver, and insurance all-inclusive for the entire contract period. Cranes shall be stationed on layby constructed on Project Highway @ every 20 km of each Toll Plaza. (Clause No. 12.12 IRC: SP:84-2019)

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Schedule C Standard Drawing for Boundary wall

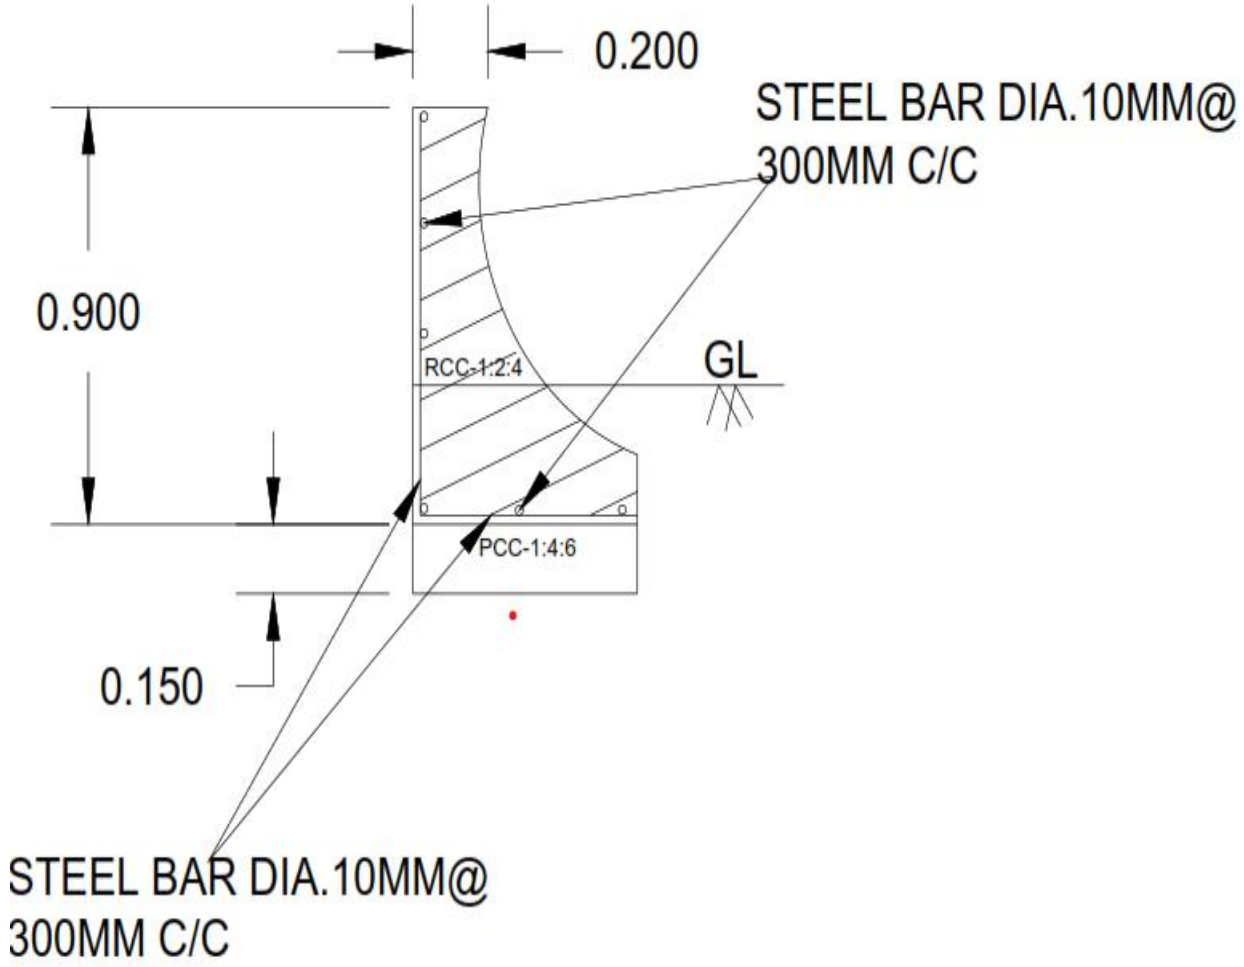

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Schedule C Standard Drawing for Toilet

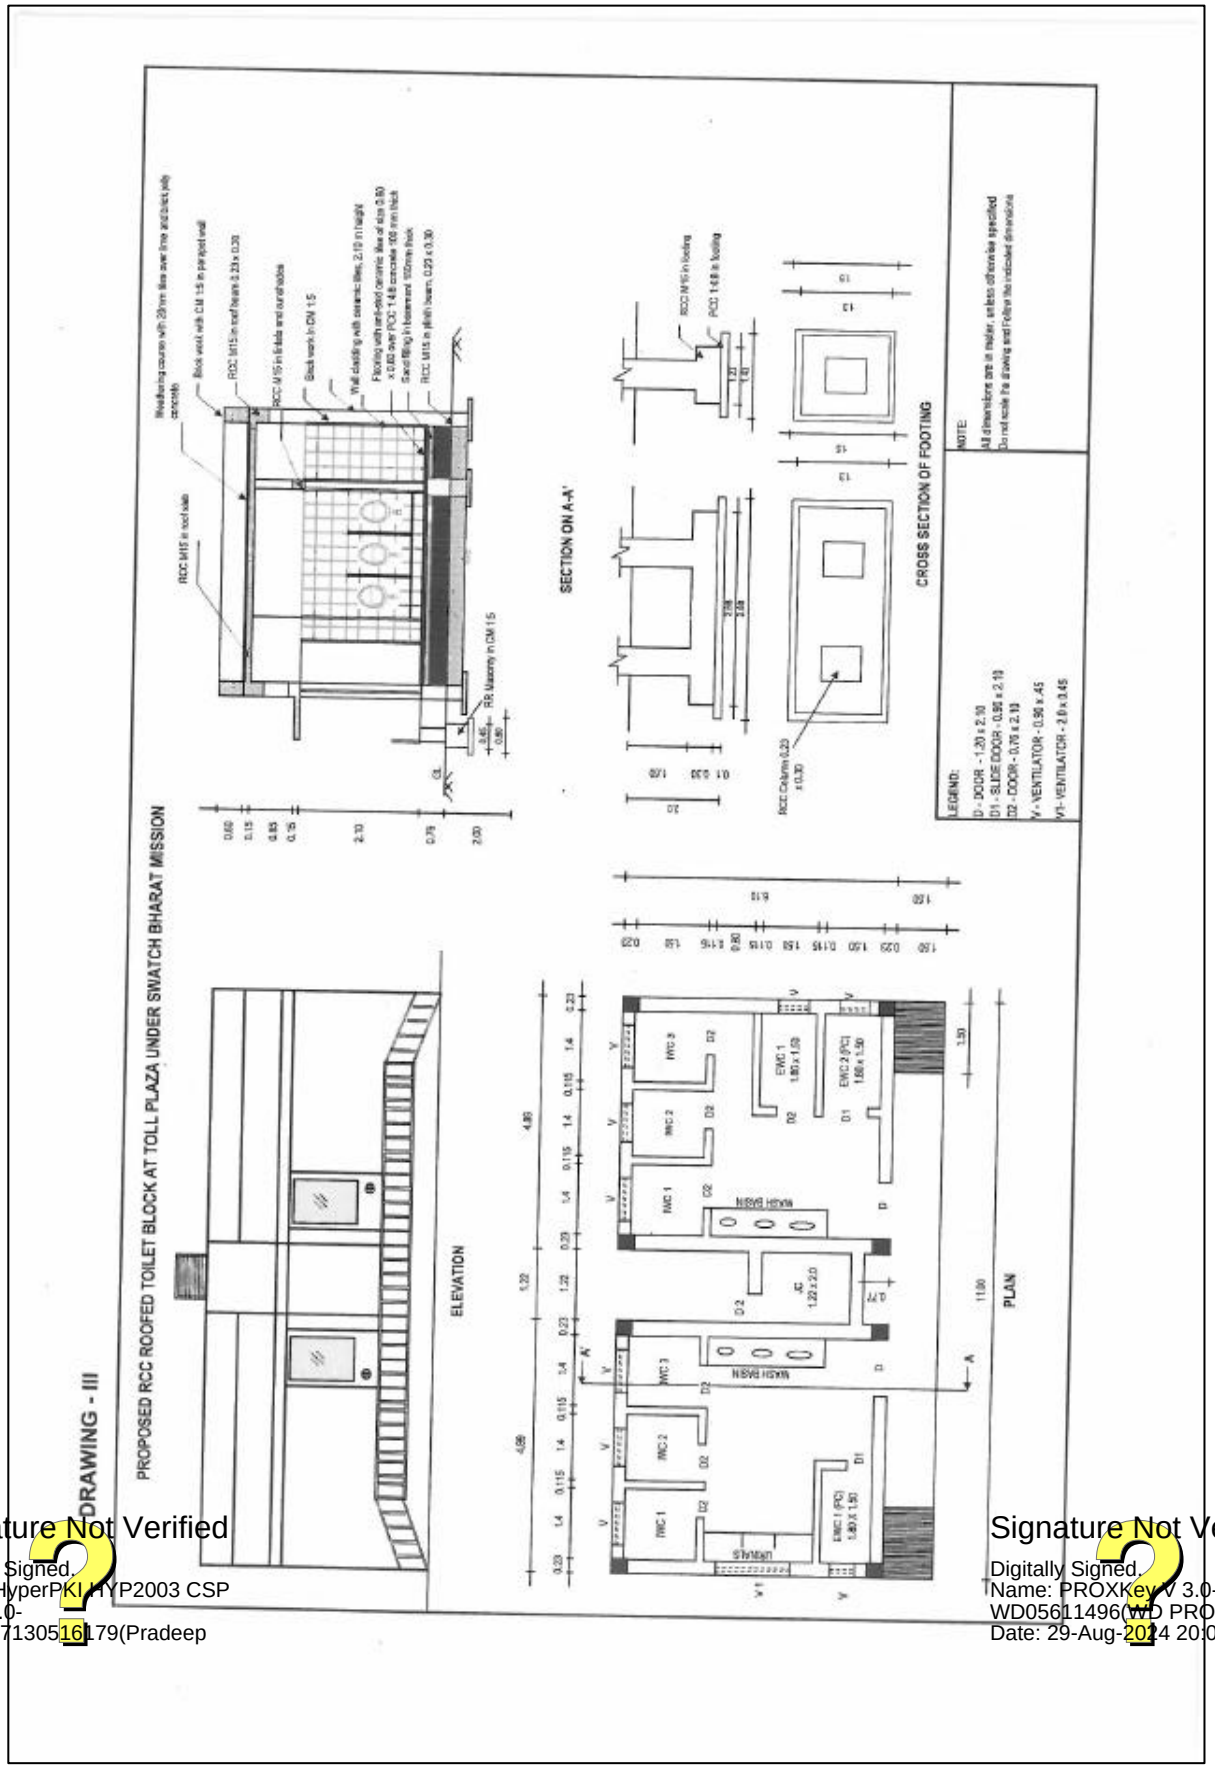

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Schedule - D

(See Clause 2.1)

SPECIFICATIONS AND STANDARDS

1. Construction

The Contractor shall comply with the Specifications and Standards set forth in Annex-I of this Schedule-D for construction of the Project Highway:

2. Design Standards

The Project Highway including Project Facilities shall conform to design requirements set out in the following documents:

Manual of Specifications and Standards for Four Laning of Highways (Second Revision) published by the Indian Roads Congress – IRC: SP: 84-2019.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS32307130516179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey IV 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Annex – I

(Schedule-D)

Specifications and Standards for Construction

1 Specifications and Standards

All Materials, works and construction operations shall conform to the Manual of Specifications and Standards for Four Laning of Highways (Second Revision) published by the Indian Roads Congress – IRC: SP: 84-2019 (referred to as "Manuals" in this Schedule) and MORTH Specifications for Road and Bridge Works (5th revision). Where the specification for a work is not given, Good Industry Practice shall be adopted to the satisfaction of the Authority's Engineer.

2 Deviations from the Specifications and Standards

(i) Notwithstanding anything to the contrary contained in the Paragraph 1 above, the following Specifications and Standards shall apply to the Project Highway, and for purposes of this Agreement, aforesaid Specifications and Standards shall be deemed to be amended to the extent set forth below:

(ii) Deviations from the Manual

Sl. No.	Item	Description of Deviation	Clause reference
1	Typical cross section	The Typical cross section shall be as given in Schedule B.	2.17
2	Service Road / Slip Road	The location and width of service road /slip road shall be as given in Schedule B.	2.12
3	Median type	The median shall be flushed and shall as per Schedule B	2.5.6
4	Shoulder	The width and type of Paved shoulder and earthen shoulder shall be as specified in Schedule B	2.6
5	Overall width of Structures	The overall width of structures shall be as per Schedule B.	7.3
6	Advance Traffic Management System	NHAI/Policy Guidelines/ Standard Documents/2023 Policy Circular No.11.53/ 2023 dated 10th October, 2023 {Decision taken on E-Office File No. IHMCL/2023-24/ATMS (Comp. No. 224126)	12.14
7	Project Facilities	The project facilities and building structures shall be constructed in accordance to Annex III of this Schedule.	Section 12

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS230713051617 9(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

(iii) M/o RT&H circular no. RW/NH-34066/09/2017 S&R dated 21.07.2020 (regarding use of manufacturedaggregates) shall be applicable on the project.

(iv) The contractor may be permitted to use waste plastic as per IRC: 98:2013 and Ministry's circulars dated 26.11.2019, 27.08.2019, 27.12.2016 & 09.11.2015 in consultation with IE.

(v) As regards, the work of Utility Shifting, the relevant specifications, relevant rules, regulations and acts ofUtility Owning Department/Agencies shall be applicable.

(vi) For specification for landscaping/tree plantation NHAI policy circular no. 7.4.7/2022 dated 12.07.2022 will be applicable.

(vii) Contractor is encouraged to do value engineering in line with M/oRT&H circular dated 30.08.2022.

Specification for Landscaping and Tree Plantation

The provision of IRC:SP-21 are to be followed except that the first row of Avenue plantation should be 14m away from the centre line of the extreme traffic lane to allow recovery area for road safety concerns. Following guidelines are to be adhered to:

(i) Site Preparation

(Clause 11.14 of IRC: SP: 21)

a. Digging of pits as per standard pit size of 60*60*60 cm.

b. Filling Farm Yard manure and Fertile Soil.

(ii) Planting of Saplings

a. Detailed information provided in IRC: SP: 21

(iii) Post-Planting Operations

(Clause 11.20 of IRC: SP: 21)

a. Weeding & Hoeing, Watering, Maintenance, Fencing, Casualty Replacement etc.

(iv) Plantation Protection

(Clause 11.15 of IRC: SP: 21)

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS230713051 6179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

a. Provision of chain link fencing, barbed wire fencing, iron fencing, individual iron trees guard fencing with wire mesh/ cement/ brick guard etc. as per the site requirement.

(v) Species-Matrix

(Annexure A to F of IRC: SP: 21)

a. Details of plant species prescribed according to Agro-Climatic Zones in IRC:SP:21-2009

(vi) Survival % of Plantation

(Clause 11.14 of IRC: SP: 21)

a. 90% for 1st and 2nd Row

b. 80% for last Row

(vii) Height of the saplings at the time of planting

(Clause 11.14 of IRC: SP: 21)

a. Ornamental Plants (Except Last Row) : 1.5 m to 2 m

b. Shade plants (Last Row) : More than 2 m

(viii) Avenue plantation

(Clause 11.14 of IRC: SP: 21)

a. Spacing between rows: 3 m

b. Spacing between plant to plant

i. 1st Row : 3 m

ii. 2nd Row : 6 m

iii. 3rd Row : 8-12 m

(ix) Median Plantation

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS32307130516179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey IV 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

(Clause 11.19 of IRC: SP: 21)

(x) Setback distance of trees

(Clause 11.2 of IRC: SP: 84 & 87:2019)

a. Distance from centre line of extreme traffic lane : 14 m

b. Turfing of grass is recommended in sections where the median width is less than 3 m by filling good quality soil up to 45 cm.

c. One row of shrubs is recommended where median width is more than 3 m.

d. For two rows, the shrubs should be planted on 4.5 to 5 m wide median at 3 m interval.

e. There should be no plantation up to 1.5 m from the edge of median on both the sides.

(xi) Activities Schedule for Avenue and Median Plantation (As per IRC: SP: 21, Table -5 at page no-52 &53)

Year	Month	Activities to be done	
1st year	Jan-March	1	Surveying & cleaning of the area
		2	Digging of Pits
		3	Procurement of Angles iron and barbed wire (or other fencing material), and erecting the fence
2nd Year	April-June	1	Purchase of Farm yard manure
		2	Brick/iron etc. guard for 1st row
		3	Plantation along the Highway
		4	Filling up of pits with Farm Yard Manure and Soil
	July-August	1	Transportation of Plants
		2	Planting of Saplings
		3	Watering
		4	Weeding and Hoeing
	Sep-Nov	1	Weeding and Hoeing
		2	Watering 4 times a month

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS32307130516179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Year	Month	Activities to be done	
	Dec-Feb	1	Weeding and Hoeing
		2	Maintenance
	March	1	Watering 4 times a month
3rd Year	April-June	1	Watering 6 times a month
	July-August	1	Casualty Replacement (20% of the total plants)
		2	Weeding
		3	Maintenance by Mali
	Sep-Nov	1	Watering 2 times a month
		2	Maintenance by Mali
	Dec-Feb	1	Maintenance by Mali
	March	1	Watering 4 times a month
		2	Maintenance by Mali
4th Year	April-March	1	Watering
		2	Casualty Replacement (10% of the total plants)
		3	Maintenance by Mali

(3) Any other activities/schedule of operations which are not covered in the annexure will be carried out as per specifications in IRC: SP: 21.

(4) Avenue plantation for cross section with service road

a. Plantation and pruning of trees to be done in view of road safety as prescribed in IRC: SP: 21 guidelines.

b. The concessionaire/ contractor shall appoint a Plantation Manager with adequate experience responsible for plantation. The CV of Plantation Manager shall be approved by the concerned Project Director.

c. Plantation Scheme and Species proposed on the alignment shall be approved by the IE/AE in consultation with Project Director and Plantation Professionals engaged by NHAI.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

SCHEDULE - E

(See Clause 4.1.3)

APPLICABLE PERMITS

1 Applicable Permits

1.1 The Concessionaire shall obtain, as required under Applicable Laws, the following Applicable Permits on or before the Appointed Date.

Part-I

(a) Permission of the State Government for extraction of boulders from quarries for and in respect of at least 20% (twenty per cent) of the total length of the Project; and

Part-II

(a) Permission of Village Panchayat and the Pollution Control Board for installation of crushers;

(b) License for use of explosives;

(c) Permission of the State Government for drawing water from river/reservoir; and

(d) Any other permits or clearances required under Applicable Laws.

1.2 Unless otherwise specified in this Agreement, Applicable Permits, as required, relating to environmental protection and conservation shall have been procured by the Authority as a Condition Precedent.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

SCHEDULE - F
(See Clause 9.1)
PERFORMANCE SECURITY

The Chairman,

National Highways Authority of India
New Delhi

WHEREAS:

(A) …….. (the "**Concessionaire**") and the Chairman, National Highways Authority of India (the "**Authority**") have entered into a Concession Agreement dated …….. (the "**Agreement**") whereby the Authority has agreed to the Concessionaire undertaking Construction work of 4-laning of Shahganj bypass end to Badi (Package-IV) of NH-146B from design km 102.000 to design km 142.357 (Design Length 40.357 km) under NH(O) in the State of Madhya Pradesh on design, build, operate and transfer ("**DBOT Annuity or Hybrid Annuity**") basis, subject to and in accordance with the provisions of the Agreement.

(B) The Agreement requires the Concessionaire to furnish a Performance Security to the Authority in a sum of Rs. ***** cr. (Rupees ***** crore) (the "**Guarantee Amount**") as security for due and faithful performance of its obligations, under and in accordance with the Agreement, during the Construction Period (as defined in the Agreement).

(C) We, …….. through our Branch at ……. (the "**Bank**") have agreed to furnish this Bank Guarantee by way of Performance Security.

NOW, THEREFORE, the Bank hereby, unconditionally and irrevocably, guarantees and affirms as follows:

1. The Bank hereby unconditionally and irrevocably guarantees the due and faithful performance of the Concessionaire's obligations during the Construction Period, under and in accordance with the Agreement, and agrees and undertakes to pay to the Authority, upon its mere first written demand, and without any demur, reservation, recourse, contest or protest, and without any reference to the Concessionaire, such sum or sums upto an aggregate sum of the Guarantee Amount as the Authority shall claim, without the Authority being required to prove or to show grounds or reasons for its demand and/or for the sum specified therein.

2. A letter from the Authority, under the hand of an Officer not below the rank of General Manager in the National Highways Authority of India, that the Concessionaire has committed default in the due and faithful performance of all or any of its obligations under and in accordance with the Agreement shall be conclusive, final and binding on the Bank. The Bank further agrees that the Authority shall be the sole judge as to whether the Concessionaire is in default in due and faithful performance of its obligations during the Construction Period under the Agreement and its decision that the Concessionaire is in default shall be final, and binding on the Bank, notwithstanding any difference between the Authority and the Concessionaire, or any dispute between them pending before any court, tribunal, arbitrators or any other authority or body, or by the discharge of the Concessionaire for any reason whatsoever.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey v3.0 WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

3. In order to give effect to this Guarantee, the Authority shall be entitled to act as if the Bank

were the principal debtor and any change in the constitution of the Concessionaire and/or the Bank, whether by their absorption with any other body or corporation or otherwise, shall not in any way or manner affect the liability or obligation of the Bank under this Guarantee.

4. It shall not be necessary, and the Bank hereby waives any necessity, for the Authority to proceed against the Concessionaire before presenting to the Bank its demand under this Guarantee.

5. The Authority shall have the liberty, without affecting in any manner the liability of the Bank under this Guarantee, to vary at any time, the terms and conditions of the Agreement or to extend the time or period for the compliance with, fulfilment and/ or performance of all or any of the obligations of the Concessionaire contained in the Agreement or to postpone for any time, and from time to time, any of the rights and powers exercisable by the Authority against the Concessionaire, and either to enforce or forbear from enforcing any of the terms and conditions contained in the Agreement and/or the securities available to the Authority, and the Bank shall not be released from its liability and obligation under these presents by any exercise by the Authority of the liberty with reference to the matters aforesaid or by reason of time being given to the Concessionaire or any other forbearance, indulgence, act or omission on the part of the Authority or of any other matter or thing whatsoever which under any law relating to sureties and guarantors would but for this provision have the effect of releasing the Bank from its liability and obligation under this Guarantee and the Bank hereby waives all of its rights under any such law.

6. This Guarantee is in addition to and not in substitution of any other guarantee or security now or which may hereafter be held by the Authority in respect of or relating to the Agreement or for the fulfilment, compliance and/or performance of all or any of the obligations of the Concessionaire under the Agreement.

7. Notwithstanding anything contained hereinbefore, the liability of the Bank under this Guarantee is restricted to the Guarantee Amount and this Guarantee will remain in force until the earlier of the 1st (first) anniversary of the Appointed Date or compliance of the conditions specified in paragraph 8 below and unless a demand or claim in writing is made by the Authority on the Bank under this Guarantee, no later than 6 (six) months from the date of expiry of this Guarantee, all rights of the Authority under this Guarantee shall be forfeited and the Bank shall be relieved from its liabilities hereunder.

8. The Performance Security shall cease to be in force and effect when the Concessionaire shall have expended on Project construction an aggregate sum not less than 30% (thirty per cent) of the Bid Project cost which is deemed to be Rs.*** cr. (Rupees ***** crore) for the purposes of this Guarantee, and provided the Concessionaire is not in breach of this Agreement. Upon request made by the Concessionaire for release of the Performance Security alongwith the particulars required hereunder, duly certified by a statutory auditor of the Concessionaire, the Authority shall release the Performance Security forthwith.

9. The Bank undertakes not to revoke this Guarantee during its currency, except with the previous express consent of the Authority in writing, and declares and warrants that it has the power to issue this Guarantee and the undersigned has full powers to do so on behalf of the Bank.

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516179(Pradeep

10. Any notice by way of request, demand or otherwise hereunder may be sent by post addressed to the Bank at its above referred Branch, which shall be deemed to have been duly authorised to receive such notice and to effect payment thereof forthwith, and if sent by post it shall be deemed to have been given at the time when it ought to have been

Signature Not Verified
Digitally Signed,
Name: PROXKey V 3.0-WDU5611496(WDUPROXKey)
Date: 29Aug2014 10:06:49

delivered in due course of post and in proving such notice, when given by post, it shall be sufficient to prove that the envelope containing the notice was posted and a certificate signed by an officer of the Authority that the envelope was so posted shall be conclusive.

11. This Guarantee shall come into force with immediate effect and shall remain in force and effect for a period of one year and six months or until it is released earlier by the Authority pursuant to the provisions of the Agreement.

12. This guarantee shall also be operatable at our _____branch at New Delhi, from whom, confirmation regarding the issue of this guarantee or extension/ renewal thereof shall be made available on demand. In the contingency of this guarantee being invoked and payment thereunder claimed, the said branch shall accept such invocation letter and make payment of amounts so demanded under the said invocation.

13. The guarantor/bank hereby confirms that it is on the SFMS (Structural Finance Messaging System) platform & shall invariably send an advice of this Bank Guarantee to the designated bank of NHAI which are as follows:

S. No.	Particulars	Details
1.	Name of Beneficiary	National Highways Authority of India
2.	Name of Bank	Canara Bank
3.	Name of Branch	Dwarka Sector-10 Branch
4.	Account No.	8598201005819
5.	IFSC Code	CNRB0008598

Signed and sealed this ……. day of ……., 20…… at ……..

SIGNED, SEALED AND DELIVERED

For and on behalf of the BANK by:

(Signature)

(Name)

(Designation)

(Code Number)

(Address)

NOTES:

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS32307130516179(Pradeep
Signature Not Verified
Digitally Signed by Officer(s)
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

(i) The bank guarantee should contain the name, designation and code number of officer(s) signing the guarantee.

(ii) The address, telephone number and other details of the Head Office of the Bank as well as of issuing Branch should be mentioned on the covering letter of issuing Branch.

Annexure 1 of Schedule F

(See Clause 23.8)
Format for Guarantee for Mobilization Advance

The Chairman,
National Highways Authority of India
New Delhi

WHEREAS:

(A) …….. **(the "Concessionaire")** and the Chairman, National Highways Authority of India **(the "Authority")** have entered into a Concession Agreement dated …….. **(the "Agreement")** whereby the Authority has agreed to the Concessionaire undertaking Construction work of 4-laning of Shahganj bypass end to Badi (Package-IV) of NH-146B from design km 102.000 to design km 142.357 (Design Length 40.357 km) under NH(O) in the State of Madhya Pradesh on design, build, operate and transfer **("DBOT Annuity or Hybrid Annuity")** basis, subject to and in accordance with the provisions of the Agreement.

(B) In accordance with Clause 23.8 of the Agreement, the Authority shall make to the Concessionaire an interest bearing (@average of one year MCLR of top 5 Scheduled Commercial Banks[10] plus 1.25%, compounded annually) advance payment (herein after called "Mobilization Advance") not exceeding 10% (ten per cent) of the Bid Project Cost; and that the Mobilization Advance shall be made in [one/two][11] installment(s) subject to the concessionaire furnishing an irrevocable and unconditional guarantee by a scheduled bank for an amount equivalent to 110% (one hundred and ten percent) of such installment to remain effective till the complete and full payment of the installment of the Mobilization Advance as security for compliance with its obligations in accordance with the Agreement. The amount of {first/second}[12] installment of the Mobilization Advance is Rs.--------- Cr. (Rupees------ Crore) and the amount of this Guarantee is Rs. ---- Cr. (Rupees---- crore) (the "Guarantee Amount")[13].

(C) We, ……..through our branch at ……. (the "**Bank**") have agreed to furnish this bank guarantee (hereinafter called the "Guarantee") for the Guarantee Amount.

NOW, THEREFORE, the Bank hereby, unconditionally and irrevocably, guarantees and affirms as follows:

1. The Bank hereby unconditionally and irrevocably guarantees the due and faithful repayment on time of the aforesaid installment of Mobilization Advance under and in accordance with the Agreement, and agrees and undertakes to pay to the Authority, upon its mere first written demand, and without any demur, reservation, recourse, contest or

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

[10] The Authority shall declare the list of top 5 Scheduled Commercial Banks on 1st September every calendar year based on the balance sheet size as declared in their annual reports. The 1 year MCLR of top 5 Scheduled Commercial Banks shall be taken at the start of every quarter.
[11] Please strike out whichever is not applicable as per Clause 23.8 of the Agreement.
[12] Please delete in case of mobilization advance is to be made in one/single installment.
[13] The Guarantee amount should be equivalent to 110% of the value of the applicable installment.

protest, and without any reference to the Concessionaire, such sum or sums upto an aggregate sum of the Guarantee Amount as the Authority shall claim, without the Authority being required to prove or to show grounds or reasons for its demand and/or for the sum specified therein.

2. A letter from the Authority, under the hand of an Officer not below the rank of General Manager in the National Highways Authority of India, that the Concessionaire has committed default in the due and faithful performance of all or any of its obligations for the repayment of the installment of the Mobilization Advance under and in accordance with the Agreement shall be conclusive, final and binding on the Bank. The Bank further agrees that the Authority shall be the sole judge as to whether the Concessionaire is in default in due and faithful performance of its obligations during and under the Agreement and its decision that the Concessionaire is in default shall be final, and binding on the Bank, notwithstanding any differences between the Authority and the Concessionaire, or any dispute between them pending before any court, tribunal, arbitrators or any other authority or body, or by the discharge of the Concessionaire for any reason whatsoever.

3. The Bank further also agrees that the Authority at its option shall be entitled to in enforce this Guarantee against the Bank as principal debtor, in the first instance without proceeding against the Concessionaire and notwithstanding any security or other guarantee that the Authority may have in relation to the Concessionaire's liability.

4. In order to give effect to this Guarantee, the Authority shall be entitled to act as if the Bank were the principal debtor and any change in the constitution of the Concessionaire and/or the Bank, whether by their absorption with any other body or corporation or otherwise, shall not in any way or manner affect the liability or obligation of the Bank under this Guarantee.

5. It shall not be necessary, and the Bank hereby waives any necessity, for the Authority to proceed against the Concessionaire before presenting to the Bank its demand under this Guarantee.

6. The Authority shall have the liberty, without affecting in any manner the liability of the Bank under this Guarantee, to vary at any time, the terms and conditions of the Mobilization Advance or to extend the time or period of its repayment or to postpone for any time, and from time to time, any of the rights and powers exercisable by the Authority against the Concessionaire, and either to enforce or forbear from enforcing any of the terms and conditions contained in the Agreement and/or the securities available to the Authority, and the Bank shall not be released from its liability and obligation under these presents by any exercise by the Authority of the liberty with reference to the matters aforesaid or by reason of time being given to the Concessionaire or any other forbearance, indulgence, act or omission on the part of the Authority or of any other matter or thing whatsoever which under any law relating to sureties and guarantors would but for this provision have the effect of releasing the Bank from its liability and obligation under this Guarantee and the Bank hereby waives all of its rights under any such law.

7. This Guarantee is in addition to and not in substitution of any other guarantee or security now or which may hereafter be held by the Authority in respect of the Mobilization Advance.

8. Notwithstanding anything contained hereinbefore, the liability of the Bank under this Guarantee is restricted to the Guarantee Amount and this Guarantee will remain in force for the period specified in paragraph 9 below and unless a demand or claim in writing is

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05B11496(Wide PROXKey)
Date: 29-Aug-2024 20:06:49

made by the Authority on the Bank under this Guarantee all rights of the Authority under this Guarantee shall be forfeited and the Bank shall be relieved from its liabilities hereunder.

9. The Guarantee shall cease to be in force and effect on _____[14] unless a demand or claim under this Guarantee is made in writing on or before the aforesaid date, the Bank shall be discharged from its liabilities hereunder.

10. The Bank undertakes not to revoke this Guarantee during its currency, except with the previous express consent of the Authority in writing, and declares and warrants that it has the power to issue this Guarantee and the undersigned has full powers to do so on behalf of the Bank.

11. Any notice by way of request, demand or otherwise hereunder may be sent by post addressed to the Bank at its above referred Branch, which shall be deemed to have been duly authorised to receive such notice and to effect payment thereof forthwith, and if sent by post it shall be deemed to have been given at the time when it ought to have been delivered in due course of post and in proving such notice, when given by post, it shall be sufficient to prove that the envelope containing the notice was posted and a certificate signed by an officer of the Authority that the envelope was so posted shall be conclusive.

12. This Guarantee shall come into force with immediate effect and shall remain in force and effect up to the date specified in paragraph 9 above or until it is released earlier by the Authority pursuant to the provisions of the Agreement.

13. This guarantee shall be operatable at our …….Branch at New Delhi, from whom, confirmation regarding the issue of this guarantee or extension/renewal thereof shall be made available on demand. In the contingency of this guarantee being invoked and payment thereunder claimed, the said branch shall accept such invocation letter and make payment of amounts so demanded under the said invocation.

14. The guarantor/bank hereby confirms that it is on the SFMS (Structural Finance Messaging System) platform & shall invariably send an advice of this Bank Guarantee to the designated bank of NHAI, the details of which are as follows:.

S. No.	Particulars	Details
1.	Name of Beneficiary	National Highways Authority of India
2.	Name of Bank	Canara Bank
3.	Address of Bank Branch	Dwarka, Sector-10 Branch
4.	Account No.	8598201005819
5.	IFSC Code	CNRB0008598

Signed and sealed this ……. day of …….., 20…… at ……..

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2008 CSP India v3.0-HS2307130516179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey v3.0 WD05611496(WD PROXKey)
Date: 29-Aug-2014 20:06:49

[14] Initially the validity shall be 60 days after the expected date for **tenth** payment milestone mentioned in Clause 23.4 of the Agreement. If the Concessionaire submits the Guarantee which has validity period, which is less than that specified herein, then the Concessionaire shall also provide an undertaking to the Authority which states that the Concessionaire shall get the validity of the Guarantee extended so that the Guarantee is valid in accordance with the footnote.

SIGNED, SEALED AND DELIVERED

For and on behalf of

the BANK by:

(Signature)

(Name)

(Designation)

(Code Number)

(Address)

NOTES:

(i) The bank guarantee should contain the name, designation and code number of the officer(s) signing the guarantee.

(iii) The address, telephone number and other details of the Head Office of the Bank as well as of issuing Branch should be mentioned on the covering letter of issuing Branch.

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS32307130516179(Pradeep

Signature Not Verified
Digitally Signed,
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ANNEXURE-II of Schedule F

(See Clauses 9.1)

FORM OF SURETY BOND

[Performance Security/Additional Performance Security]

To

National Highways Authority of India
G-5 & 6, Sector-10, Dwarka,
New Delhi-110075,

WHEREAS:

(A) _____(the "Concessionaire") and the Chairman, National Highways Authority of India (the "Authority") have entered into a concession agreement dated _____ (the "Agreement") whereby the Authority has agreed to the Concessionaire undertaking Construction work of 4-laning of Shahganj bypass end to Badi (Package-IV) of NH-146B from design km 102.000 to design km 142.357 (Design Length 40.357 km) under NH(O) in the State of Madhya Pradesh on Hybrid Annuity Mode, subject to and in accordance with the provision of the agreement.

(B) The agreement requires the Concessionaire to furnish a performance security to the Authority in a sum of Rs. ___ Crore (Rupees_____ Crore) (the **"Surety Bond Amount"**) as security for due and faithful performance of its obligations, under and in accordance with the Agreement, during the Construction Period (as defined in the Agreement).

(C) We,……..through our branch at ..... (the **"Surety Insurer")** have agreed to furnish this **Surety Bond** by way of Performance security.

NOW, THEREFORE, the **Surety Insurer** hereby, unconditionally and irrevocably, guarantees and affirms as follows:

1. The **Surety Insurer** herby unconditionally and irrevocably guarantees the due and faithful performance of the Concessionaire's obligations during the Construction Period under and in accordance with the Agreement, and agrees and undertakes to pay to the Authority, upon its mere first written demand, and without any demur, reservation, recourse, contest or protest, and without any reference to the Concessionaire, such sum or sums up to an aggregate sum of the **Surety Bond** Amount as the Authority shall claim, without the Authority being required to prove or to show grounds or reasons for its demand and/or for the sum specified therein.

2. A letter from the Authority, under the hand of an officer not below the rank of General Manager in the National Highways Authority of India, that the Concessionaire has committed default in the due and faithful performance of all or any of its obligations under and in accordance with the Agreement shall be conclusive, final and binding on the **Surety Insurer**. The **Surety Insurer** further agrees that the Authority shall be the sole judge as to

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS230713051619(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey (v 3.0) WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

whether the Concessionaire is in default in due and faithful performance of its obligations during the Construction Period under the Agreement and its decision that the Concessionaire is in default shall be final and binding on the **Surety Insurer**, notwithstanding any differences between the Authority and the Concessionaire, or any dispute between them pending before any court, tribunal, arbitrators or any other authority or body, or by the discharge of the Concessionaire for any reason whatsoever.

3. In order to give effect to this **Surety Bond**, the Authority shall be entitled to act as if the **Surety Insurer** were the principal debtor and any change in the constitution of the Concessionaire and/or the Surety Insurer, whether by their absorption with any other body or corporation or otherwise, shall not in any way or manner affect the liability or obligation of the **Surety Insurer** under this **Surety Bond**.

4. It shall not be necessary, and the **Surety Insurer** hereby waives any necessity, for the Authority to proceed against the Concessionaire before presenting to the **Surety Insurer** its demand under this **Surety Bond**.

5. The Authority shall have the liberty, without affecting in any manner the liability of the **Surety Insurer** under this **Surety Bond**, to vary at any time, the terms and conditions of the Agreement or to extend the time or period for the compliance with, fulfillment and/ or performance of all or any of the obligations of the Concessionaire contained in the Agreement or to postpone for any time, and from time to time, any of the rights and powers exercisable by the Authority against the Concessionaire, and either to enforce or forbear from enforcing any of the terms and conditions contained in the Agreement and/or the securities available to the Authority, and the **Surety Insurer** shall not be released from its liability and obligation under these presents by any exercise by the Authority of the liberty with reference to the matters aforesaid or by reason of time being given to the Concessionaire or any other forbearance, indulgence, act or omission on the part of the Authority or of any other matter or thing whatsoever which under any law relating to sureties and guarantors would but for this provision have the effect of releasing the **Surety Insurer** from its liability and obligation under this **Surety Bond** and the **Surety Insurer** hereby waives all of its rights under any such law.

6. This **Surety Bond** is in addition to and not in substitution of any other **Surety Bond** or security now or which may hereafter be held by the Authority in respect of or relating to the Agreement or for the fulfillment, compliance and/or performance of all or any of the obligations of the Concessionaire under the Agreement.

7. Notwithstanding anything contained hereinbefore, the liability of the **Surety Insurer** under this **Surety Bond** is restricted to the **Surety Bond** Amount and this **Surety Bond** will remain in force until the earlier of the 1st (first) anniversary of the Appointed Date or compliance of the conditions specified in paragraph 8 below and unless a demand or claim in writing is made by the Authority on the **Surety Insurer** under this **Surety Bond,** no later than 6 (six) months from the date of expiry of this **Surety Bond,** all rights of the Authority under this **Surety Bond** shall be forfeited and the **Surety Insurer** shall be relieved from its liabilities hereunder.

8. The Performance Security shall cease to be in force and effect when the Concessionaire shall have expended on Project construction an aggregate sum not less than 10% (ten per cent) of the Bid Project cost which is deemed to be Rs.*** cr. (Rupees ****** crore) for the purposes of this **Surety Bond,** and provided the Concessionaire is not in breach of this Agreement. Upon request made by the Concessionaire for release of the Performance

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619179(Pradeep
Signature Not Verified
Digitally Signed by
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Security alongwith the particulars required hereunder, duly certified by a statutory auditor of the Concessionaire, the Authority shall release the Performance Security forthwith.

9. The **Surety Insurer** undertakes not to revoke this **Surety Bond** during its currency, except with the previous express consent of the Authority in writing, and declares and warrants that it has the power to issue this **Surety Bond** and the undersigned has full powers to do so on behalf of the **Surety Insurer**.

10. Any notice by way of request, demand or otherwise hereunder may be sent by post addressed to the **Surety Insurer** at its above referred branch, which shall be deemed to have been duly authorized to receive such notice and to effect payment thereof forthwith, and if sent by post it shall be deemed to have been given at the time when it ought to have been delivered in due course of post and in proving such notice, when given by post, it shall be sufficient to prove that the envelope containing the notice was posted and a certificate signed by an officer of the Authority that the envelope was so posted shall be conclusive.

11. This **Surety Bond** shall come into force with immediate effect and shall remain in force and effect for a period of one year and six months or until it is released earlier by the Authority pursuant to the provisions of the Agreement.

12. This **Surety Bond** shall also be operatable at our _____branch at New Delhi, from whom, confirmation regarding the issue of this bond or extension/ renewal thereof shall be made available on demand. In the contingency of this bond being invoked and payment thereunder claimed, the said branch shall accept such invocation on letter and make payment of amounts so demanded under the said invocation.

13. This **Surety Bond** is subject to the Uniform Rules for Demand Guarantees (URDG) 2010 Revision, ICC Publication No. 758, except that the supporting statement under Article 15(a) is hereby excluded.

Signed and sealed this……..Day of……..,……at……

SIGNED, SEALED AND DELIVERED

For and on behalf of the Surety insurer by:

(Signature)

(Name)

(Designation)

(Code Number)

(Address)

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

SCHEDULE - G

(See Clause 12.1)

PROJECT COMPLETION SCHEDULE

1 Project Completion Schedule

During Construction Period, the Concessionaire shall comply with the requirements set forth in this Schedule-G for each of the Project Milestones and the Scheduled Completion Date (the "Project Completion Schedule"). Within 15 (fifteen) days of the date of each Project Milestone, the Concessionaire shall notify the Authority of such compliance along with necessary particulars thereof.

2 Project Milestone-I

2.1 Project Milestone-I shall occur on the date falling on the 180th (one hundred and eightieth) day from the Appointed Date (the "Project Milestone-I").

2.2 Prior to the occurrence of Project Milestone-I, the Concessionaire shall have expended not less than 20% (twenty per cent) of the total capital cost set forth in the Financial Package.

2.3 Prior to the occurrence of Project Milestone –I, the Concessionaire shall have commenced construction of the Project and achieved 20% Physical Progress.

3 Project Milestone-II

3.1 Project Milestone-II shall occur on the date falling on the 330th (three hundred and thirtieth) day from the Appointed Date (the "Project Milestone-II").

3.2 Prior to the occurrence of Project Milestone-II, the Concessionaire shall have expended not less than 35% (thirty five per cent) of the total capital cost set forth in the Financial Package. Provided, however, that at least 70% (seventy percent) of the expenditure referred to hereinabove shall have been incurred on physical works which shall not include advances of any kind to any person or expenditure of any kind on plant and machinery.

3.3 Prior to the occurrence of Project Milestone –II, the Concessionaire shall have commenced construction of the Project and achieved 35% Physical Progress

4 Project Milestone-III

4.1 Project Milestone-III shall occur on the date falling on the 540th (five hundred and fourtieth) day from the Appointed Date (the "Project Milestone-III").

4.2 Prior to the occurrence of Project Milestone-III, the Concessionaire shall have commenced construction of all Project Facilities and expended not less than 75% (seventy five per cent) of the total capital cost set forth in the Financial Package.

4.3 Prior to the occurrence of Project Milestone –III, the Concessionaire shall have commenced construction of the Project and achieved 75% Physical Progress

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed,
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

5 Scheduled Completion Date

5.1 The Scheduled Completion Date shall be the 730th (seven hundred and thirtieth) day from the Appointed Date.

5.2 On or before the Scheduled Completion Date, the Concessionaire shall have completed the Project in accordance with this Agreement.

6 Extension of period

Upon extension of any or all of the aforesaid Project Milestones or the Scheduled Completion Date, as the case may be, under and in accordance with the provisions of this Agreement, the Project Completion Schedule shall be deemed to have been amended accordingly.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Annexure-I of Schedule G

Format for Contract Price Weightages for Highway Projects with Flexible Pavements

Contract Price Weightages

1.1 The Bid Project Cost for this Agreement is Rs. 519,00,00,000/- (Rupees five hundred and nineteen crore only)
1.2 Proportions of the Contract Price for different stages of Construction of the Project Highway shall be as specified below:

Item	Stage for measurement of Physical Progress	Unit	Qty.	Weightage in percentage to the Contract Price
1	2	3	4	5
Road works including culverts, minor bridges, underpasses, overpasses, approaches to ROB/RUB/ Major Bridges/ Structures (but excluding service roads)	**A- Widening and strengthening of existing road**			
	(1) Earthwork up to top of the sub-grade	Km	[***]	[***]
	(2) Granular work (sub- base, base, shoulders)			
	(a) GSB	Km	[***]	[***]
	(b) WMM	Km	[***]	[***]
	(3) Shoulders	Km	[***]	[***]
	(4) Bituminous work			
	(a) DBM	Km	[***]	[***]
	(b) BC	Km	[***]	[***]
	(5) Rigid Pavement			
	Concrete work	Km	[***]	[***]
	(6) Widening and repair of culverts	No.	[***]	[***]
	(7) Widening and repair of minor bridges	No.	[***]	[***]
	B- New realignment/bypass			
	(1) Earthwork up to top of the sub-grade	Km	[***]	[***]
	(2) Granular work (sub- base, base, shoulders)			
	(a) GSB	Km	[***]	[***]
	(b) WMM	Km	[***]	[***]
	(3) Shoulders	Km	[***]	[***]
	(4) Bituminous work			
	(a) DBM	Km	[***]	[***]
	(b) BC	Km	[***]	[***]

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS32307130516179(Pradeep
Signature Not Verified
Digitally Signed:
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

	(5) Rigid Pavement			
	Concrete work	Km	[***]	[***]
	C- New culverts, minor bridges, underpasses, overpasses on existing road, realignments, bypasses:			
	(1) Culverts	No.	[***]	[***]
	(2) Minor bridges			
	(a) Foundation	No.	[***]	[***]
	(b) Sub-structure	No.	[***]	[***]
	(c) Super-structure (including crash barriers etc. complete). If pre-cast girders/ segments are used, 40% of the weightage of the stage in percentage to the bid project cost is assigned to the casting of such precast girders/segments.	No.	[***]	[***]
	(3) Cattle/Pedestrian underpasses			
	(a) Foundation	No.	[***]	[***]
	(b) Sub-structure	No.	[***]	[***]
	(c) Super-structure (including crash barriers etc. complete). If pre- cast girders/ segments are used, 40% of the weightage of the stage in percentage to the bid project cost is assigned to the casting of such precast girders/segments.	No.	[***]	[***]
	(4) Pedestrian overpasses			
	(a) Foundation	No.	[***]	[***]
	(b) Sub-structure	No.	[***]	[***]
	(c) Super-structure (including crash barriers etc. complete) If pre- cast girders/ segments are used, 40% of the weightage of the stage in percentage to the bid project cost is assigned to the casting of such precast girders/segments.	No.	[***]	[***]
	(5) Grade separated structures			
	(a) Underpasses			
	(i) Foundation	No.	[***]	[***]
	(ii) Sub-structure	No.	[***]	[***]

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey v 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2014 20:06:49

	(iii) Super-structure (including crash barriers etc. complete) If pre- cast girders/ segments are used, 40% of the weightage of the stage in percentage to the bid project cost is assigned to the casting of such precast girders/segments.	No.	[***]	[***]
	(b) Overpass			
	(i) Foundation	No.	[***]	[***]
	(ii) Sub-structure	No.	[***]	[***]
	(iii) Super-structure (including crash barriers etc. complete) If pre-cast girders/ segments are used, 40% of the weightage of the stage in percentage to the bid project cost is assigned to the casting of such precast girders/segments.	No.	[***]	[***]
	(c) Flyover			
	(i) Foundation	No.	[***]	[***]
	(ii) Sub-structure	No.	[***]	[***]
	(iii) Super-structure (including crash barriers etc. complete) If pre-cast girders/ segments are used, 40% of the weightage of the stage in percentage to the bid project cost is assigned to the casting of such precast girders/segments.	No.	[***]	[***]
	(d) Foot over Bridge	No.	[***]	[***]
Major Bridge works and ROB/RUB	**A- Widening and repairs of Major Bridges**			
	(1) Foundation			
	(a) Open Foundation	No.	[***]	[***]
	(b) Pile Foundation/Well Foundation	No.	[***]	[***]
	(2) Sub-structure	No.	[***]	[***]
	(3) Super-structure (including crash barriers etc. complete) If pre-cast girders/ segments are used, 40% of the weightage of the stage in percentage to the bid project cost is assigned to the casting of such precast girders/segments.	No.	[***]	[***]

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS230713051619(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

	B- Widening and repair of			
	(a) ROB			
	(1) Foundation	No.	[***]	[***]
	(2) Sub-structure	No.	[***]	[***]
	(3) Super-structure (including crash barriers etc. complete) If pre-cast girders/ segments are used, 40% of the weightage of the stage in percentage to the bid project cost is assigned to the casting of such precast girders/segments.	No.	[***]	[***]
	(b) RUB			
	(1) Foundation	No.	[***]	[***]
	(2) Sub-structure	No.	[***]	[***]
	(3) Super-structure (including crash barriers etc. complete) If pre-cast girders/ segments are used, 40% of the weightage of the stage in percentage to the bid project cost is assigned to the casting of such precast girders/segments.	No.	[***]	[***]
	C- New Major Bridges			
	(1) Foundation	No.	[***]	[***]
	(a) Open Foundation	No.	[***]	[***]
	(b) Pile Foundation/Well Foundation	No.	[***]	[***]
	(2) Sub-structure	No.	[***]	[***]
	(3) Super-structure (including crash barriers etc. complete) If pre-cast girders/ segments are used, 40% of the weightage of the stage in percentage to the bid project cost is assigned to the casting of such precast girders/segments.	No.	[***]	[***]
	D- New rail-road bridges			
	(a) ROB			
	(1) Foundation	No.	[***]	[***]
	(2) Sub-structure	No.	[***]	[***]
	(3) Super-structure (including crash barriers etc. complete) If pre-cast girders/ segments are used, 40% of the weightage of the stage in percentage to the bid project cost is assigned to	No.	[***]	[***]

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS230713051619(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

	the casting of such precast girders/segments.			
	(b) RUB			
	(1) Foundation	No.	[***]	[***]
	(2) Sub-structure	No.	[***]	[***]
	(3) Super-structure (including crash barriers etc. complete) If pre-cast girders/ segments are used, 40% of the weightage of the stage in percentage to the bid project cost is assigned to the casting of such precast girders/segments.	No.	[***]	[***]
Structures (elevated sections, reinforced earth)	(1) Foundation	No.	[***]	[***]
	(2) Sub-structure	No.	[***]	[***]
	(3) Super-structure (including crash barriers etc. complete) If pre-cast girders/ segments are used, 40% of the weightage of the stage in percentage to the bid project cost is assigned to the casting of such precast girders/segments.	No.	[***]	[***]
	(4) Reinforced Earth Wall (includes Approaches of ROB, Underpasses, Overpasses, Flyover etc. If RE-wall is used with facia panels/blocks, 5% of weightage of the stage in percentage to bid project cost is assigned to the casting of such facia panels/blocks for one complete approach.	Sqm	[***]	[***]
Electrical and Public Health Utilities	EHT line	Km	[***]	[***]
	EHT crossing	No.	[***]	[***]
	HT/LT lines (including Transformers if any)	Km	[***]	[***]
	HT/LT crossings	No.	[***]	[***]
	Water pipeline	Km	[***]	[***]
	Water pipeline crossings	No.	[***]	[***]
	Sewage line	Km	[***]	[***]
	Sewage line crossings	No.	[***]	[***]
Other Works	**(i) Service roads/ Slip Roads**	Km	[***]	[***]
	(ii) Toll Plaza	No.	[***]	[***]
	(iii) Road side drains	Km	[***]	[***]
	(iv) Road signs, markings, km stones, safety devices, ….			

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

	(a)Road signs, markings, km stones, ….	Km	[***]	[***]
	(b) Concrete Crash Barrier/ W-Beam Crash Barrier in Road work	Km	[***]	[***]
	(v) Project facilities			
	(a) Bus bays	No.	[***]	[***]
	(b) Truck lay-byes	No.	[***]	[***]
	(c) Rest areas	No.	[***]	[***]
	(vi) Repairs to bridges/structures	No.	[***]	[***]
	(vii) Road side plantation	Km	[***]	[***]
	(viii) Protection works			
	(a) Boulder Pitching on slopes	Km	[***]	[***]
	(b) Toe/Retaining wall	Km	[***]	[***]
	(ix) Tunnel			
	(a) Excavation	Metre	[***]	[***]
	(b) Construction of support system including rock bolting, lining etc.	Metre	[***]	[***]
	(c) On complete completion of tunnel	Metre	[***]	[***]
	(x) Miscellaneous	Lump sum	[***]	[***]
			Total	**100.00%**

* The above list is illustrative and may require modification as per the scope of the work.

** Measurement of Progress

For example, if the total length of bituminous work to be done is 100 km, the physical progress of bituminous work shall be determined as follows:

Physical progress of bituminous work
=Weightage for bituminous work x (L'/L)

L = Total length of bituminous work in km
L' = Executed length of bituminous work in km

Similarly, the physical progress for other stages shall be worked out and addition of all will give the total progress achieved.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Annexure-I of Schedule G

Format for Contract Price Weightages for Highway Projects with Rigid Pavements

Contract Price Weightages

1.1 The Bid Project Cost for this Agreement is Rs. 519,00,00,000/- (Rupees five hundred and nineteen crore only)
1.2 Proportions of the Contract Price for different stages of Construction of the Project Highway shall be as specified below:

Item	Stage for measurement of Physical Progress	Unit	Qty.	Weightage in percentage to the Contract Price
1	2	3	4	5
Road works including culverts, minor bridges, underpasses, overpasses, approaches to ROB/RUB/ Major Bridges/ Structures (but excluding service roads)	**A- Widening and strengthening of existing road**			
	(1) Earthwork up to top of the sub-grade	Km	[***]	[***]
	(2) Granular work (sub- base, shoulders)			
	GSB	Km	[***]	[***]
	(3) Shoulders	Km	[***]	[***]
	(4) Bituminous work	Km	[***]	[***]
	(5) Rigid Pavement			
	(a) DLC	Km	[***]	[***]
	(b) PQC	Km	[***]	[***]
	(6) Widening and repair of culverts	No.	[***]	[***]
	(7) Widening and repair of minor bridges	No.	[***]	[***]
	B- New realignment/bypass			
	(1) Earthwork up to top of the sub-grade	Km	[***]	[***]
	(2) Granular work (sub- base, shoulders)			
	GSB	Km	[***]	[***]
	(3) Shoulders	Km	[***]	[***]
	(4) Bituminous work	Km	[***]	[***]
	(5) Rigid Pavement			
	(a) DLC	Km	[***]	[***]
	(b) PQC	Km	[***]	[***]
	C- New culverts, minor bridges, underpasses, overpasses on existing road, realignments, bypasses:			

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

	(1) Culverts	No.	[***]	[***]
	(2) Minor bridges			
	(a) Foundation	No.	[***]	[***]
	(b) Sub-structure	No.	[***]	[***]
	(c) Super-structure (including crash barriers etc. complete) If pre-cast girders/ segments are used, 40% of the weightage of the stage in percentage to the bid project cost is assigned to the casting of such precast girders/segments.	No.	[***]	[***]
	(3) Cattle/Pedestrian underpasses			
	(a) Foundation	No.	[***]	[***]
	(b) Sub-structure	No.	[***]	[***]
	(c) Super-structure (including crash barriers etc. complete) If pre-cast girders/ segments are used, 40% of the weightage of the stage in percentage to the bid project cost is assigned to the casting of such precast girders/segments.	No.	[***]	[***]
	(4) Pedestrian overpasses			
	(a) Foundation	No.	[***]	[***]
	(b) Sub-structure	No.	[***]	[***]
	(c) Super-structure (including crash barriers etc. complete) If pre-cast girders/ segments are used, 40% of the weightage of the stage in percentage to the bid project cost is assigned to the casting of such precast girders/segments.	No.	[***]	[***]
	(5) Grade separated structures			
	(a) Underpasses			
	(i) Foundation	No.	[***]	[***]
	(ii) Sub-structure	No.	[***]	[***]
	(iii) Super-structure (including crash barriers etc. complete) If pre-cast girders/ segments are used,40% of the weightage of the stage in percentage to the bid project cost is assigned to the casting of such precast girders/segments.	No.	[***]	[***]
	(b) Overpass			
	(i) Foundation	No.	[***]	[***]
	(ii) Sub-structure	No.	[***]	[***]

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

	(iii) Super-structure (including crash barriers etc. complete) If pre-cast girders/ segments are used,40% of the weightage of the stage in percentage to the bid project cost is assigned to the casting of such precast girders/segments.	No.	[***]	[***]
	(c) Flyover			
	(i) Foundation	No.	[***]	[***]
	(ii) Sub-structure	No.	[***]	[***]
	(iii) Super-structure (including crash barriers etc. complete) If pre-cast girders/ segments are used,40% of the weightage of the stage in percentage to the bid project cost is assigned to the casting of such precast girders/segments.	No.	[***]	[***]
	(d) Foot over Bridge	No.	[***]	[***]
Major Bridge works and ROB/RUB	**A- Widening and repairs of Major Bridges**			
	(1) Foundation			
	(a) Open Foundation	No.	[***]	[***]
	(b) Pile Foundation/Well Foundation	No.	[***]	[***]
	(2) Sub-structure	No.	[***]	[***]
	(3) Super-structure (including crash barriers etc. complete) If pre-cast girders/ segments are used, 40% of the weightage of the stage in percentage to the bid project cost is assigned to the casting of such precast girders/segments.	No.	[***]	[***]
	B- Widening and repair of			
	(a) ROB			
	(1) Foundation	No.	[***]	[***]
	(2) Sub-structure	No.	[***]	[***]
	(3) Super-structure (including crash barriers etc. complete) If pre-cast girders/ segments are used, 40% of the weightage of the stage in percentage to the bid project cost is assigned to the casting of such precast girders/segments.	No.	[***]	[***]

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

	(b) RUB			
	(1) Foundation	No.	[***]	[***]
	(2) Sub-structure	No.	[***]	[***]
	(3) Super-structure (including crash barriers etc. complete) If pre-cast girders/ segments are used, 40% of the weightage of the stage in percentage to the bid project cost is assigned to the casting of such precast girders/segments.	No.	[***]	[***]
	C- New Major Bridges			
	(1) Foundation	No.	[***]	[***]
	(a) Open Foundation	No.	[***]	[***]
	(b) Pile Foundation/Well Foundation	No.	[***]	[***]
	(2) Sub-structure	No.	[***]	[***]
	(3) Super-structure (including crash barriers etc. complete) If pre-cast girders/ segments are used, 40% of the weightage of the stage in percentage to the bid project cost is assigned to the casting of such precast girders/segments.	No.	[***]	[***]
	D- New rail-road bridges			
	(a) ROB			
	(1) Foundation	No.	[***]	[***]
	(2) Sub-structure	No.	[***]	[***]
	(3) Super-structure (including crash barriers etc. complete) If pre-cast girders/ segments are used, 40% of the weightage of the stage in percentage to the bid project cost is assigned to the casting of such precast girders/segments.	No.	[***]	[***]
	(b) RUB			
	(1) Foundation	No.	[***]	[***]
	(2) Sub-structure	No.	[***]	[***]
	(3) Super-structure (including crash barriers etc. complete)) If pre-cast girders/ segments are used, 40% of the weightage of the stage in percentage to the bid project cost is assigned to the casting of such precast girders/segments.	No.	[***]	[***]
	(1) Foundation	No.	[***]	[***]

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Structures (elevated sections, reinforced earth)	(2) Sub-structure	No.	[***]	[***]
	(3) Super-structure (including crash barriers etc. complete) If pre-cast girders/ segments are used, 40% of the weightage of the stage in percentage to the bid project cost is assigned to the casting of such precast girders/segments.	No.	[***]	[***]
	(4) Reinforced Earth Wall (includes Approaches of ROB, Underpasses, Overpasses, Flyover etc. If RE-wall is used with facia panels/blocks, 10% of weightage of the stage in percentage to bid project cost is assigned to the casting of such facia panels/blocks for one complete approach.	Sqm	[***]	[***]
Electrical and public health utilities	EHT line	Km	[***]	[***]
	EHT crossing	No.	[***]	[***]
	HT/LT lines (including Transformers if any)	Km	[***]	[***]
	HT/LT crossings	No.	[***]	[***]
	Water pipeline	Km	[***]	[***]
	Water pipeline crossings	No.	[***]	[***]
	Sewage line	Km	[***]	[***]
	Sewage line crossings	No.	[***]	[***]
Other Works	**(i) Service roads/ Slip Roads**	Km	[***]	[***]
	(ii) Toll Plaza	No.	[***]	[***]
	(iii) Road side drains	Km	[***]	[***]
	(iv) Road signs, markings, km stones, safety devices, ….			
	(a)Road signs, markings, km stones, ….	Km	[***]	[***]
	(b) Concrete Crash Barrier/ W-Beam Crash Barrier in Road work	Km	[***]	[***]
	(v) Project facilities			
	(a) Bus bays	No.	[***]	[***]
	(b) Truck lay-byes	No.	[***]	[***]
	(c) Rest areas	No.	[***]	[***]
	(vi) Repairs to bridges/structures	No.	[***]	[***]
	(vii) Road side plantation	Km	[***]	[***]
	(viii) Protection works			
	(a) Boulder Pitching on slopes	Km	[***]	[***]
	(b) Toe/Retaining wall	Km	[***]	[***]

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

	(ix) Tunnel			
	(a) Excavation	Metre	[***]	[***]
	(b) Construction of support system including rock bolting, lining etc.	Metre	[***]	[***]
	(c) On complete completion of tunnel	Metre	[***]	[***]
	(x) Miscellaneous	Lump sum	[***]	[***]
			Total	**100.00%**

* The above list is illustrative and may require modification as per the scope of the work.

** Measurement of Progress

For example, if the total length of bituminous work to be done is 100 km, the physical progress of bituminous work shall be determined as follows:

Physical progress of bituminous work
=Weightage for bituminous work x (L'/L)

L = Total length of bituminous work in km

L' = Executed length of bituminous work in km

Similarly, the physical progress for other stages shall be worked out and addition of all will give the total progress achieved.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

SCHEDULE - H

(See Clause 12.2)

DRAWINGS

1 Drawings

In compliance of the obligations set forth in Clause 12.2 of this Agreement, the Concessionaire shall furnish to the Independent Engineer, free of cost, all Drawings listed in Annex-I of this Schedule-H.

2 Additional drawings

If the Independent Engineer determines that for discharging its duties and functions under this Agreement, it requires any drawings other than those listed in Annex-I, it may by notice require the Concessionaire to prepare and furnish such drawings forthwith. Upon receiving a requisition to this effect, the Concessionaire shall promptly prepare and furnish such drawings to the Independent Engineer, as if such drawings formed part of Annex-I of this Schedule-H.

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed,
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Annex - I (Schedule-H)

List of Drawings

A broad list of the drawings of the various components/elements of the Project Highway and project facilities required to be submitted by the Concessionaire is given below:

- Horizontal and Vertical Alignment with details of reference pillars. Horizontal Intersection Point, Vertical Intersection Points, elements of curves, and sight distances.
- Cross-section at 50 m interval along the alignment within ROW
- Typical Cross-section with details of pavement structures
- Detailed drawings of individual Bridges/ Structures/ROB
- Detailed drawings for individual culverts
- Detailed layout drawings for intersections and interchanges
- Drawings for Road sign, Markings, Toll Plaza, Bus bays, Parking areas, Truck lay-byes
- Detailed layout drawings for traffic circulation for service roads/slip roads and detailed drawings for vehicular and pedestrian underpasses including cross-section drawings through vehicular and pedestrian underpasses at the project road level and the structures bed level.
- Street Lighting
- Landscaping & Tree Plantation
- Traffic Aid Post
- Medical Aid Post
- Vehicle Rescue Post
- Traffic Management drawings for safety in construction zones
- Detailed drawings of road side furniture and safety structures
- Detailed drawings of guide bunds and protection works
- Detailed drawings of Drainage including RCC covered drains as per standard specifications.
- Any other drawings for completion of work and safety of fast and slow vehicles and pedestrian and cattle.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

SCHEDULE - I

(See Clause 14.1.2)

TESTS

1 Schedule for Tests

1.1 The Concessionaire shall, no later than 30 (thirty) days prior to the likely completion of the Project, notify the Independent Engineer and the Authority of its intent to subject the Project to Tests, and no later than 7 (seven) days prior to the actual date of Tests, furnish to the Independent Engineer and the Authority detailed inventory and particulars of all works and equipment forming part of the Project.

1.2 The Concessionaire shall notify the Independent Engineer of its readiness to subject the Project to Tests at any time after 7 (seven) days from the date of such notice, and upon receipt of such notice, the Independent Engineer shall, in consultation with the Concessionaire, determine the date and time for each Test and notify the same to the Authority who may designate its representative to witness the Tests. The Independent Engineer shall thereupon conduct the Tests itself or cause any of the Tests to be conducted in accordance with Article 14 and this Schedule-I.

2 Tests

2.1 In pursuance of the provisions of Clause 14.1.2 of this Agreement, the Independent Engineer shall conduct, or cause to be conducted, the Tests specified in this Paragraph 2.

2.2 Visual and physical Test: The Independent Engineer shall conduct a visual and physical check of the Project to determine that all works and equipment forming part thereof conform to the provisions of this Agreement.

2.3 Test drive: The Independent Engineer shall undertake a test drive of the Project by a Car and by a fully loaded Truck to determine that the quality of service conforms to the provisions of the Agreement.

2.4 Riding quality Test: Riding quality of each lane of the carriageway shall be checked with the help of a calibrated bump integrator and the maximum permissible roughness for purposes of this Test shall be 1,800 (one thousand and eight hundred) mm for each kilometer.

2.5 Pavement Composition Test: The thickness and composition of the pavement structure shall be checked on a sample basis by digging pits to determine conformity of such pavement structure with Specifications and Standards. The sample shall consist of one pit in each direction of travel to be chosen at random in each stretch of 5 (five) kilometers of the Project. The first pit for the sample shall be selected by the Independent Engineer through an open draw of lots and every fifth kilometer from such first pit shall form part of the sample for this pavement quality Test.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2009 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey v3.0 WD05611496(MultiPROXKey)
Date: 29-Aug-2014 20:06:49

2.6 Cross-section Test: The cross-sections of the Project shall be checked on a sample basis through physical measurement of their dimensions for determining the conformity thereof with Specifications and Standards. For the road portion, the sample shall consist of one spot to be selected at random in each stretch of 1(one) kilometer of the Project. The first spot

for the sample shall be selected by the Independent Engineer through an open draw of lots and the spots located at every one kilometer from such first spot shall form part of the sample. For the bridge portion, one spot shall be selected at random by the Independent Engineer in each span of the bridge.

2.7 Structural Test for bridges: All major and minor bridges, including over bridges, underpasses and flyovers, constructed by the Concessionaire shall be subjected to the Rebound Hammer and Ultrasonic Pulse Velocity tests, to be conducted in accordance with the procedure described in Special Report No. 17: 1996 of the IRC Highway Research Board on Non-destructive Testing Techniques, at two spots in every span, to be chosen at random by the Independent Engineer. Bridges with a span of 15 (fifteen) meters or more shall also be subjected to load testing.

2.8 Other Tests: The Independent Engineer may require the Concessionaire to carry out or cause to be carried additional Tests, in accordance with Good Industry Practice, for determining the compliance of the Project with Specifications and Standards.

2.9 Environmental audit: The Independent Engineer shall carry out a check to determine conformity of the Project with the environmental requirements set forth in Applicable Laws and Applicable Permits.

2.10 Safety review: Safety audit of the Project shall have been undertaken by the Safety Consultant as set forth in Schedule-L, and on the basis of such audit, the Independent Engineer shall determine conformity of the Project with the provisions of this Agreement.

3 Agency for conducting Tests

All Tests set forth in this Schedule-I shall be conducted by the Independent Engineer or such other agency or person as it may specify in consultation with the Authority.

4 Completion/Provisional Certificate

Upon successful completion of Tests, the Independent Engineer shall issue the Completion Certificate or the Provisional Certificate, as the case may be, in accordance with the provisions of Article 14.

5 Tests during construction

Without prejudice to the provisions of this Schedule-I, tests during construction shall be conducted In accordance with the provisions of Clause 13.3.1.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

SCHEDULE - J

(See Clause 14.2 & 14.3)

COMPLETION CERTIFICATE

1 I/We,…….. (Name of the Independent Engineer), acting as Independent Engineer, under and in accordance with the Concession Agreement dated ……..(the "Agreement"), for the Construction work of 4-laning of Shahganj bypass end to Badi (Package-IV) of NH-146B from design km 102.000 to design km 142.357 (Design Length 40.357 km) under NH(O) in the State of Madhya Pradesh Project (the "Project") on design, build, operate and transfer (the "DBOT Annuity or Hybrid Annuity") basis, through……(Name of Concessionaire), hereby certify that the Tests specified in Article 14 and Schedule-I of the Agreement have been successfully undertaken to determine compliance of the Project with the provisions of the Agreement, and I/We am/are satisfied that the Project can be safely and reliably placed in commercial service of the Users thereof.

2 It is certified that Rain Water Harvesting and Artificial Recharging arrangements have been provided by the Concessionaire as per Schedule C of the Concession Agreement, and are functional. Details (with location chainage) are as given in Annex- _____.

3 It is certified that, in terms of the aforesaid Agreement, all works forming part of the Project have been completed, and the Project is hereby declared fit for entry into commercial operation on this the day of 20

SIGNED, SEALED AND DELIVERED

For and on behalf of

INDEPENDENT ENGINEER by:

(Signature)

(Name)

(Designation)

(Address)

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed,
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

PROVISIONAL CERTIFICATE

1 I/We,…… (Name of the Independent Engineer), acting as Independent Engineer, under and in accordance with the Concession Agreement Dated…… (the "Agreement"), for the Construction work of 4-laning of Shahganj bypass end to Badi (Package-IV) of NH-146B from design km 102.000 to design km 142.357 (Design Length 40.357 km) under NH(O) in the State of Madhya Pradesh Project (the "Project") on design, build, operate and transfer (the "DBOT Annuity or Hybrid Annuity") basis through…….(Name of Concessionaire), hereby certify that the Tests specified in Article 14 and Schedule-I of the Agreement have been undertaken for the Project/section……. of the Project to determine compliance thereof with the provisions of the Agreement.

2 Construction Works forming part of the Project/section of the Project that were found to be incomplete and/or deficient have been specified in the Punch List appended hereto, and the Concessionaire has agreed and accepted that it shall complete and/or rectify all such works in the time and manner set forth in the Agreement. Some of the incomplete works have been delayed as a result of reasons attributable to the Authority or due to Force Majeure and the Provisional Certificate cannot be withheld on this account. Though the remaining incomplete works have been delayed as a result of reasons attributable to the Concessionaire,[δ] I/We am/are satisfied that having regard to the nature and extent of such incomplete works, it would not be prudent to withhold commercial operation of the Project/section…….. of the Project, pending completion thereof.

3 In view of the foregoing, I/We am/are satisfied that the Project/section of the Project can be safely and reliably placed in commercial service of the Users thereof, and in terms of the Agreement, the Project/section of the Project is hereby provisionally declared fit for entry into commercial operation on this the …… day of…… 20

ACCEPTED, SIGNED, SEALED AND DELIVERED

FOR AND ON BEHALF OF

CONCESSIONAIRE by:

(Signature)
(Name and Designation)
(Address)

SIGNED, SEALED AND DELIVERED

FOR AND ON BEHALF OF

INDEPENDENT ENGINEER by:

(Signature)
(Name and Signature)
(Address)

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

[δ] May be struck out if not applicable. Also strike out other parts which are not applicable.

SCHEDULE - K

(See Clause 17.2)

MAINTENANCE REQUIREMENTS

1 Maintenance Requirements

1.1 The Concessionaire shall, at all times, operate and maintain the Project in accordance with the provisions of the Agreement, Applicable Laws and Applicable Permits. In particular, the Concessionaire shall, at all times during the Operation Period, conform to the maintenance requirements set forth in this Schedule-K (the "Maintenance Requirements").

1.2 The Concessionaire shall repair or rectify any defect or deficiency set forth in Paragraph 2 of this Schedule-K within the time limit specified therein and any failure in this behalf shall constitute a breach of the Agreement. Upon occurrence of any breach hereunder, the Authority shall be entitled to recover Damages as set forth in Clause 17.8 of the Agreement, without prejudice to the rights of the Authority under the Agreement, including Termination thereof.

2. Repair/rectification of defects and deficiencies

2.1 The obligations of the Concessionaire in respect of Maintenance Requirements shall include repair and rectification of the defects and deficiencies specified in Annex - I of this Schedule - K within the time limit set forth therein.

2.2 The Concessionaire shall at all times maintain an adequate inventory of spares and consumables to meet the Maintenance Requirements.

3 Other defects and deficiencies

3.1 In respect of any defect or deficiency not specified in Annex - I of this Schedule-K, the Concessionaire shall undertake repair or rectification in accordance with Good Industry Practice and within the time limit specified by the Independent Engineer.

3.2 In respect of any defect or deficiency not specified in Annex - I of this Schedule-K, the Independent Engineer may, in conformity with Good Industry Practice, specify the permissible limit of deviation or deterioration with reference to the Specifications and Standards, and any deviation or deterioration beyond the permissible limit shall be repaired or rectified by the Concessionaire in accordance with Good Industry Practice and within the time limit specified by the Independent Engineer.

4 Extension of time limit

Notwithstanding anything to the contrary specified in this Schedule-K, if the nature and extent of any defect or deficiency justifies more time for its repair or rectification than the time specified herein, the Concessionaire shall be entitled to additional time in conformity the Good Industry Practice. Such additional time shall be determined by the Independent Engineer and conveyed to the Concessionaire and the Authority with reasons thereof.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

5 Emergency repairs/restoration

Notwithstanding anything to the contrary contained in this Schedule-K, if any defect, deficiency or deterioration in the Project poses a hazard to safety or risk of damage to property, the Concessionaire shall promptly take all reasonable measures for eliminating or minimizing such danger.

6 Daily Inspection by the Concessionaire

The Concessionaire shall, through its engineer, undertake a daily visual inspection of the Project and maintain a record thereof in a register to be kept in such form and manner as the Independent Engineer may specify. Such record shall be kept in safe custody of the Concessionaire and shall be open to inspection by the Authority and the Independent Engineer at any time during office hours.

7 Divestment Requirements

All defects and deficiencies specified in this Schedule-K shall be repaired and rectified by the Concessionaire so that the Project conforms to the Maintenance Requirements on the Transfer Date.

8 Display of Schedule - K

The Concessionaire shall display copy of this Schedule –K at the site along with the complaint register stipulated in article 40.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051616179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

ANNEX – I

(Schedule-K)

Repair/Rectification of Defects and Deficiencies

The Concessionaire shall repair and rectify the defects and deficiencies specified in this Annex-I of Schedule-K within the time limit set forth herein.

ROADS

(a)

S. No.	Nature of defect or deficiency	Time limit for Repair/ rectification
Carriageway and paved shoulders		
(i)	Breach or blockade	Temporary restoration of traffic within 24 hours; permanent restoration within 15 days
(ii)	Roughness value exceeding 2,750 mm in a stretch of 1 km (as measured by a standardized rough meter/bump integrator)	180 days
(iii)	Pot holes	48 hours
(iv)	Cracking in more than 5% of road surface in a stretch of 1 km	30 days
(v)	Rutting exceeding 10 mm in more than 2% of road surface in a stretch of 1 km (measured with 3 m straight edge)	30 days
(vi)	Bleeding/skidding	7 days
(vii)	Raveling/Stripping of bitumen surface exceeding 10 Sq m	15 days
(viii)	Damage to pavement edges exceeding 100 mm	15 days
(ix)	Removal of debris	6 hours
Hard/earth shoulders, side slopes, drains and culverts		
(i)	Variation by more than 2% in the prescribed slope of camber/cross fall	30 days
(ii)	Edge drop at shoulders exceeding 40 mm	7 days
(iii)	Variation by more than 15% in the prescribed side (embankment) slopes	30 days
(iv)	Rain cuts/gullies in slope	7 days
(v)	Damage to or silting of culverts and side drains during and immediately preceding the rainy season	7 days
(vi)	Desalting of drains in urban/semi-urban areas	48 hours
Road side furniture including road signs and pavement marking		
(i)	Damage to shape or position; Poor visibility or loss of retro-reflectivity	48 hours
Street lighting and telecom (ATMS)		
(i)	Any major failure of the system	24 hours
(ii)	Faults and minor failures	8 hours
Trees and plantation		
(i)	Obstruction in a minimum head-room of 5 m above carriageway or obstruction in visibility of road signs	24 hours

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

(ii)	Deterioration in health of trees and bushes	Timely watering and treatment
(iii)	Replacement of trees and bushes	90 days
(iv)	Removal of vegetation affecting sight line and road structures	15 days
Rest areas		
(i)	Cleaning of toilets	Every 4 hours
(ii)	Defects in electrical, water and sanitary installations	24 hours
Other Project Facilities and Approach roads		
(i)	Damage or deterioration in Approach Roads, [pedestrian facilities, truck lay-bys, bus-bays, bus- shelters, cattle crossings, Traffic Aid Posts, Medical Aid Posts, Rain Water Harvesting/Artificial Recharge Unit and other works]	15 days

BRIDGES

Superstructure of bridges		
(i)	Cracks Temporary measures Permanent measures	 Within 48 hours Within 45 days
(ii)	Spalling/scaling	15 days
Foundations of bridges		
(i)	Scouring and/or cavitation	15 days
Piers, abutments, return walls and wing walls		
(i)	Cracks and damages including settlement and tilting	30 days
Bearings (metallic) of bridges		
(i)	Deformation	15 days
Joints in bridges		
(i)	Loosening and malfunctioning of joints	15 days
Other items relating to bridges		
(i)	Deforming of pads in elastomeric bearings	7 days
(ii)	Gathering of dirt in bearings and joints or clogging of spouts, weep holes and vent-holes	3 days
(iii)	Damage or deterioration in parapets and handrails	3 days
(iv)	Rain-cuts or erosion of banks of the side slopes of approaches	15 days
(v)	Damage to wearing coat	15days
(vi)	Damage or deterioration in approach slabs, pitching, apron, toes, floor or guide bunds	30 days
(vii)	Growth of vegetation affecting the structure or obstructing the waterway	15 days

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS32307130516179(Pradeep

Signature Not Verified
Digitally Signed,
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

SCHEDULE - L

(See Clause 18.1.1)

SAFETY REQUIREMENTS

1 Guiding principles

1.1 Safety Requirements aim at reduction in injuries, loss of life and damage to property resulting from accidents on or about the Project, irrespective of the person(s) at fault.

1.2 Users of the Project include motorised and non-motorized vehicles as well as pedestrians and animals involved in, or associated with accidents. Vulnerable Road Users (VRU) include pedestrians as well as riders of motorized two-wheelers, bicycles and other vehicles which do not provide adequate occupant protection.

1.3 Safety Requirements apply to all phases of construction, operation and maintenance with emphasis on identification of factors associated with accidents, consideration of the same, and implementation of appropriate remedial measures.

1.4 Safety Requirements include measures associated with traffic management and regulation such as road signs, pavement marking, traffic control devices, roadside furniture, highway design elements, enforcement and emergency response.

2 Obligations of the Concessionaire

The Concessionaire shall abide by the following insofar as they relate to safety of the Users:

(a) Applicable Laws and Applicable Permits;

(b) Manual for Safety in Road Design, issued by MoRTH;

(c) Relevant Standards/Guidelines of IRC relating to safety, road geometries, bridges, culverts, road signs, pavement marking and roadside furniture;

(d) Provisions of this Agreement; and

(e) Good Industry Practice.

3 Appointment of Safety Consultant

For carrying out safety audit of the Project under and in accordance with this Schedule-L, the Authority shall appoint from time to time, one or more qualified firms or organisations as its consultants (the "Safety Consultant"). The Safety Consultant shall employ a team comprising, without limitation, one road safety expert and one traffic planner to undertake safety audit of the Project.

4 Safety measures during Development Period

4.1 No later than 90 (ninety) days from the date of this Agreement, the Authority shall appoint a Safety Consultant for carrying out safety audit at the design stage of the Project. The Safety Consultant shall collect data on all fatal crashes and other road accidents which occurred on the Project in the preceding two years by obtaining copies of the Relevant First Information Reports (FIRs) from the police stations having jurisdiction. The information contained in such FIRs shall be summarised in the form prescribed by the Authority for this

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey v3.0 (WD5611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

purpose and the data shall be analysed for the type of victims killed or injured, impacting vehicles, location of accidents and other relevant factors.

4.2 The Concessionaire shall provide to the Safety Consultant, in four copies, the relevant drawings containing the design details that have a bearing on safety of Users (the "Safety Drawings"). Such design details shall include horizontal and vertical alignments; sightlines; layouts of intersections; interchanges; road cross-section; bridges and culverts; side drains; provision for parked vehicles, slow moving vehicles (tractors, bullock carts, bicycles) and pedestrians; bus bays; truck lay-bys; and other incidental or consequential information. The Safety Consultant shall review the design details and forward 3 (three) copies of the Safety Drawings with its recommendations, if any, to the Independent Engineer who shall record its comments, if any, and forward one copy each to the Authority and the Concessionaire.

4.3 The accident data and the design details shall be compiled, analysed and used by the Safety Consultant for evolving a package of recommendations consisting of safety related measures for the Project. The safety audit shall be completed in a period of three months and a report thereof (the "Safety Report") shall be submitted to the Authority, in 5 (five) copies. One copy each of the Safety Report shall be forwarded by the Authority to the Concessionaire and the Independent Engineer forthwith.

4.4 The Concessionaire shall endeavor to incorporate the recommendations of the Safety Report in the design of the Project, as may reasonably be required in accordance with Applicable Laws, Applicable Permits, Manuals and Guidelines of the Authority, Specifications and Standards, and Good Industry Practice. If the Concessionaire does not agree with any or all of such recommendations, it shall state the reasons thereof and convey them to the Authority forthwith. In the event that any or all of the works and services recommended in the Safety Report fall beyond the scope of Schedule-B, Schedule-C or Schedule-D, the Concessionaire shall make a report thereon and seek the instructions of the Authority for funding such works in accordance with the provisions of Article 18.

4.5 Without prejudice to the provisions of Paragraph 4.4, the Concessionaire and the Independent Engineer shall, within 15 (fifteen) days of receiving the Safety Report, send their respective comments thereon to the Authority, and no later than 15 (fifteen) days of receiving such comments, the Authority shall review the same along with the Safety Report and by notice direct the Concessionaire to carry out any or all of the recommendations contained therein with such modifications as the Authority may specify; provided that any works or services required to be undertaken hereunder shall be governed by the provisions of Article 18.

5 Safety measures during Construction Period

5.1 A Safety Consultant shall be appointed by the Authority, no later than 4 (four) months prior to the expected COD, for carrying out a safety audit of the completed Construction Works.

5.2 The Safety Consultant shall collect and analyses the accident data for the preceding two years in the manner specified in Paragraph 4.1 of this Schedule- L. It shall study the Safety Report for the Development Period and inspect the Project to assess the adequacy of safety measures. The Safety Consultant shall complete the safety audit within a period of 4 (four) months and submit a Safety Report recommending a package of additional road safety measures, if any, that are considered essential for reducing accident hazards on the Project. Such recommendations shall be processed, mutatis mutandis, and acted upon in the manner set forth in Paragraphs 4.3, 4.4 and 4.5 of this Schedule-L.

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey V 3.0-HS230513040(W Direct PROXKey)
Date: 29-Aug-2024 20:06:49

5.3 The Concessionaire shall make adequate arrangements during the Construction Period for the safety of workers and road Users in accordance with the guidelines of IRC for safety in construction zones, and notify the Authority and the Independent Engineer about such arrangements.

6 Safety measures during Operation Period

6.1 The Concessionaire shall develop, implement and administer a surveillance and safety program for Users, including correction of safety violations and deficiencies and all other actions necessary to provide a safe environment in accordance with this Agreement.

6.2 The Concessionaire shall establish a Highway Safety Management Unit (the "HSMU") to be functional on and after COD, and designate one of its officers to be in-charge of the HSMU. Such officer shall have specialist knowledge and training in road safety and traffic engineering by having attended a course conducted by a reputed organization on the subject.

6.3 The Concessionaire shall keep a copy of every FIR recorded by the Police with respect to any accident occurring on the Project. In addition, the Concessionaire shall also collect data for all cases of accidents not recorded by the Police but where a vehicle rolled over or had to be towed away. The information so collected shall be summarized in the form prescribed by the Authority for this purpose. The Concessionaire shall also record the exact location of each accident on a road map. The aforesaid data shall be submitted to the Authority at the conclusion of every quarter and to the Safety Consultant as and when appointed.

6.4 The Concessionaire shall submit to the Authority before the 31st (thirty first) May of each year, an annual report (in ten copies) containing, without limitation, a detailed listing and analysis of all accidents of the preceding Accounting Year and the measures taken by the Concessionaire pursuant to the provisions of Paragraph 6.1 of this Schedule-L for averting or minimizing such accidents in future.

6.5 Once in every Accounting Year, a safety audit shall be carried out by the Safety Consultant to be appointed by the Authority. It shall review and analyses the annual report and accident data of the preceding year, and undertake an inspection of the Project. The Safety Consultant shall complete the safety audit within a period of 1 (one) month and submit a Safety Report recommending specific improvements, if any, required to be made to the road, bridges, culverts, markings, signs, road furniture and Project Facilities, including cattle crossings and pedestrian crossings. Such recommendations shall be processed, mutatis mutandis, and acted upon in the manner set forth in Paragraphs 4.3, 4.4 and 4.5 of this Schedule-L.

7 Costs and expenses

Costs and expenses incurred in connection with the Safety Requirements set forth herein, including the provisions of Paragraph 2 of this Schedule-L, shall be met in accordance with Article 18, and in particular, the remuneration of the Safety Consultant, safety audit, and costs incidental thereto, shall be met by the Concessionaire.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

SCHEDULE - M

(See Clause 21.1)

SELECTION OF INDEPENDENT ENGINEER

1 Selection of Independent Engineer

1.1 The provisions of the Model Request for Proposals for Selection of Technical Consultants, issued by the Ministry of Finance, GOI vide OM 24(23)/PF-II/ 2008 dated 21 May 2009, or any substitute thereof shall apply for selection of an experienced firm to discharge the functions and duties of an Independent Engineer. Provided, however, that no entity which is owned or controlled by the Authority shall be eligible for appointment as the Independent Engineer hereunder.

1.2 In the event of termination of an Independent Engineer appointed in accordance with the provisions of Paragraph 1.1, the Authority shall appoint another firm of Technical Consultants forthwith or may engage a government-owned entity in accordance with the provisions of Paragraph 5 of this Schedule-M.

1.3 The Concessionaire may, in its discretion, nominate a representative to participate in the process of selection to be undertaken by the Authority under this Schedule-M.

2 Terms of Reference

The Terms of Reference for the Independent Engineer shall substantially conform to Schedule-N.

3 Fee and expenses

3.1 In determining the nature and quantum of duties and services to be performed by the Independent Engineer during the Development Period and Construction Period, the Authority shall endeavor that payments to the Independent Engineer on account of fee and expenses do not exceed 3% (three per cent) of the Bid Project Cost. Payments not exceeding such 3% (three per cent) shall be borne equally by the Authority and the Concessionaire in accordance with the provisions of this Agreement and any payments in excess thereof shall be borne entirely by the Authority.

3.2 The nature and quantum of duties and services to be performed by the Independent Engineer during the Operation Period shall be determined by the Authority in conformity with the provisions of this Agreement and with due regard for economy in expenditure. All payments made to the Independent Engineer on account of fee and expenses during the Operation Period shall be borne equally by the Authority and the Concessionaire.

4 Selection every three years

No later than 3 (three) years from the date of appointment of Independent Engineer pursuant to the provisions of Paragraph 1 of this Schedule-M, and every 3 (three) years thereafter, the Authority shall engage another firm in accordance with the criteria set forth in this Schedule-M.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

5 Appointment of government entity as Independent Engineer

Notwithstanding anything to the contrary contained in this Schedule, the Authority may in its discretion appoint a government-owned entity as the Independent Engineer; provided that such entity shall be a body corporate having as one of its primary function the provision of consulting, advisory and supervisory services for engineering projects; provided further that a government- owned entity which is owned or controlled by the Authority shall not be eligible for appointment as Independent Engineer.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051 6179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

SCHEDULE - N

(See Clause 21.2.1)

TERMS OF REFERENCE FOR INDEPENDENT ENGINEER

1 Scope

These Terms of Reference for the Independent Engineer (the "TOR") are being specified pursuant to the Concession Agreement dated (the "Agreement"), which has been entered into between the Authority and the "Concessionaire") for Construction work of 4-laning of Shahganj bypass end to Badi (Package-IV) of NH-146B from design km 102.000 to design km 142.357 (Design Length 40.357 km) under NH(O) in the State of Madhya Pradesh on design, build, operate and transfer (the "DBOT Annuity or Hybrid Annuity") basis, and a copy of which is annexed hereto and marked as Annex-A to form part of this TOR.

2 Definitions and interpretation

2.1 The words and expressions beginning with or in capital letters used in this TOR and not defined herein but defined in the Agreement shall have, unless repugnant to the context, the meaning respectively assigned to them in the Agreement.

2.2 References to Articles, Clauses and Schedules in this TOR shall, except where the context otherwise requires, be deemed to be references to the Articles, Clauses and Schedules of the Agreement, and references to Paragraphs shall be deemed to be references to Paragraphs of this TOR.

2.3 The rules of interpretation stated in Clauses 1.2, 1.3 and 1.4 of the Agreement shall apply, mutatis mutandis, to this TOR.

3.1 The role and functions of the Independent Engineer shall include the following:

(I) review of the Drawings and Documents as set forth in Paragraph 4;

(ii) Review, inspection and monitoring of Construction Works as set forth in Paragraph 5; conducting Tests on completion of construction and issuing Completion/ Provisional Certificate as set forth in Paragraph 5

(iv) Review, inspection and monitoring of O&M as set forth in Paragraph 6;

(v) review, inspection and monitoring of Divestment Requirements as set forth in Paragraph 7;

(vi) determining, as required under the Agreement, the costs of any works or services and/or their reasonableness;

(vii) determining, as required under the Agreement, the period or any extension thereof, for performing any duty or obligation;

(viii) Assisting the Parties in resolution of Disputes as set forth in Paragraph 8; and

(ix) Undertaking all other duties and functions in accordance with the Agreement.

3.2 The Independent Engineer shall discharge its duties in a fair, impartial and efficient manner, consistent with the highest standards of professional integrity and Good Industry Practice.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey v3.0-WD05611496(WD PROXKey)
Date: 29 Aug 2024 20:06:49

4 Development Period

4.1 During the Development Period, the Independent Engineer shall undertake a detailed review of the Drawings to be furnished by the Concessionaire along with supporting data, including the geo-technical and hydrological investigations, characteristics of materials from borrow areas and quarry sites, topographical surveys and traffic surveys. The Independent Engineer shall complete such review and send its comments/ observations to the Authority and the Concessionaire within 15 (fifteen) days of receipt of such Drawings. In particular, such comments shall specify the conformity or otherwise of such Drawings with the Scope of the Project and Specifications and Standards.

4.2 The Independent Engineer shall review any modified Drawings or supporting Documents sent to it by the Concessionaire and furnish its comments within 7 (seven) days of receiving such Drawings or Documents.

4.3 The Independent Engineer shall review the Drawings sent to it by the Safety Consultant in accordance with Schedule-L and furnish its comments thereon to the Authority and the Concessionaire within 7 (seven) days of receiving such Drawings. The Independent Engineer shall also review the Safety Report and furnish its comments thereon to the Authority within 15 (fifteen) days of receiving such report.

4.4 The Independent Engineer shall review the detailed design, construction methodology, quality assurance procedures and the procurement, engineering and construction time schedule sent to it by the Concessionaire and furnish its comments within 15 (fifteen) days of receipt thereof.

4.5 Upon reference by the Authority, the Independent Engineer shall review and; comment on the EPC Contract or any other contract for construction, operation and maintenance of the Project, and furnish its comments within 7 (seven) days from receipt of such reference from the Authority.

5 Construction Period

5.1 In respect of the Drawings, Documents and Safety Report received by the Independent Engineer for its review and comments during the Construction Period, the provisions of Paragraph 4 shall apply, mutatis mutandis.

5.2 The Independent Engineer shall review the monthly progress report furnished by the Concessionaire and send its comments thereon to the Authority and the Concessionaire within 7 (seven) days of receipt of such report.

5.3 The Independent Engineer shall inspect the Construction Works and the Project once every month, preferably after receipt of the monthly progress report from the Concessionaire, but before the 20th (twentieth) day of each month in any case, and make out a report of such inspection (the "Inspection Report") setting forth an overview of the status, progress, quality and safety of construction, including the work methodology adopted, the materials used and their sources, and conformity of Construction Works with the Scope of the Project and the Specifications and Standards. In a separate section of the Inspection Report, the Independent Engineer shall describe in reasonable detail the lapses, defects or deficiencies observed by it in the construction of the Project. The Inspection Report shall also contain a review of the maintenance of the existing lanes in conformity with the provisions of the

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed by
Name: PROXKey V 3.0-WD056114 96(WD PROXKey)
Date: 29 Aug 2024 20:06:49

Agreement. The Independent Engineer shall send a copy of its Inspection Report to the Authority and the Concessionaire within 7 (seven) days of the inspection.

5.4 The Independent Engineer may inspect the Project more than once in a month if any lapses, defects or deficiencies require such inspections.

5.5 For determining that the Construction Works conform to Specifications and Standards, the Independent Engineer shall require the Concessionaire to carry out, or cause to be carried out, tests on a sample basis, to be specified by the Independent Engineer in accordance with Good Industry Practice for quality assurance. For purposes of this Paragraph 5.5, the tests specified in the IRC Special Publication-11 (Handbook of Quality Control for Construction of Roads and Runways) and the Specifications for Road and Bridge Works issued by the Authority (the "Quality Control Manuals") or any modification/substitution thereof shall be deemed to be tests conforming to Good Industry Practice for quality assurance. The Independent Engineer shall issue necessary directions to the Concessionaire for ensuring that the tests are conducted in a fair and efficient manner, and shall monitor and review the results thereof.

5.6 The sample size of the tests, to be specified by the Independent Engineer under Paragraph 5.5, shall comprise 10% (ten per cent) of the quantity or number of tests prescribed for each category or type of tests in the Quality Control Manuals; provided that the Independent Engineer may, for reasons to be recorded in writing, increase the aforesaid sample size by up to 10% (ten per cent) for certain categories or types of tests.

5.7 The timing of tests referred to in Paragraph 5.5, and the criteria for acceptance/ rejection of their results shall be determined by the Independent Engineer in accordance with the Quality Control Manuals. The tests shall be undertaken on a random sample basis and shall be in addition to, and independent of, the tests that may be carried out by the Concessionaire for its own quality assurance in accordance with Good Industry Practice.

5.8 In the event that the Concessionaire carries out any remedial works for removal or rectification of any defects or deficiencies, the Independent Engineer shall require the Concessionaire to carry out, or cause to be carried out, tests to determine that such remedial works have brought the Construction Works into conformity with the Specifications and Standards, and the provisions of this Paragraph 5 shall apply to such tests.

5.9 In the event that the Concessionaire fails to achieve any of the Project Milestones, the Independent Engineer shall undertake a review of the progress of construction and identify potential delays, if any. If the Independent Engineer shall determine that completion of the Project is not feasible within the time specified in the Agreement, it shall require the Concessionaire to indicate within 15 (fifteen) days the steps proposed to be taken to expedite progress, and the period within which COD shall be achieved. Upon receipt of a report from the Concessionaire, the Independent Engineer shall review the same and send its comments to the Authority and the Concessionaire forthwith.

5.10 If at any time during the Construction Period, the Independent Engineer determines that the Concessionaire has not made adequate arrangements for the safety of workers and Users in the zone of construction or that any work is being carried out in a manner that threatens the safety of the workers and the Users, it shall make a recommendation to the Authority forthwith, identifying the whole or part of the Construction Works that should be suspended for ensuring safety in respect thereof.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed by
Name: PROXKey V 3.0-WS0561149(WIN PROXKey)
Date: 29-Aug-2024 20:06:49

5.11 In the event that the Concessionaire carries out any remedial measures to secure the safety of suspended works and Users, it may, by notice in writing, require the Independent Engineer to inspect such works, and within 3 (three) days of receiving such notice, the Independent Engineer shall inspect the suspended works and make a report to the Authority forthwith, recommending whether or not such suspension may be revoked by the Authority.

5.12 If suspension of Construction Works is for reasons not attributable to the Concessionaire, the Independent Engineer shall determine the extension of dates set forth in the Project Completion Schedule, to which the Concessionaire is reasonably entitled, and shall notify the Authority and the Concessionaire of the same.

5.13 The Independent Engineer shall carry out, or cause to be carried out, all the Tests specified in Schedule-I and issue a Completion Certificate or Provisional Certificate, as the case may be. For carrying out its functions under this Paragraph 5.13 and all matters incidental thereto, the Independent Engineer shall act under and in accordance with the provisions of Article 14 and Schedule-I.

5.14 Upon reference from the Authority, the Independent Engineer shall make a fair and reasonable assessment of the costs of providing information, works and services as set forth in Article 16 and certify the reasonableness of such costs for payment by the Authority to the Concessionaire.

5.15 The Independent Engineer shall aid and advise the Concessionaire in preparing the Maintenance Manual.

5.16 Upon reference from the Authority, the Independent Engineer shall undertake the assessment of cost of civil works, as per applicable schedule of rates, for the reduction of Scope of work as provided in Clause 16.6.1 of the Concession Agreement.

6 Operation Period

6.1 In respect of the Drawings, Documents and Safety Report received by the Independent Engineer for its review and comments during the Operation Period, the provisions of Paragraph 4 shall apply, mutatis mutandis.

6.2 The Independent Engineer shall review the annual Maintenance Program furnished by the Concessionaire and send its comments thereon to the Authority and the Concessionaire within 15 (fifteen) days of receipt of the Maintenance Program.

6.3 The Independent Engineer shall review the monthly status report furnished by the Concessionaire and send its comments thereon to the Authority and the Concessionaire within 7 (seven) days of receipt of such report.

6.4 The Independent Engineer shall inspect the Project once every month, preferably after receipt of the monthly status report from the Concessionaire, but before the 20th (twentieth) day of each month in any case, and make out an O&M Inspection Report setting forth an overview of the status, quality and safety of O&M including its conformity with the Maintenance Requirements and Safety Requirements. In a separate section of the O&M Inspection Report, the Independent Engineer shall describe in reasonable detail, inspect, defects or deficiencies observed by it in O&M of the Project. The Independent Engineer shall send a copy of its O&M Inspection Report to the Authority and the Concessionaire within 7 (seven) days of the inspection.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

6.5 The Independent Engineer may inspect the Project more than once in a month, if any lapses, defects or deficiencies require such inspections.

6.6 The Independent Engineer shall in its O&M Inspection Report specify the tests, if any, that the Concessionaire shall carry out, or cause to be carried out, for the purpose of determining that the Project is in conformity with the Maintenance Requirements. It shall monitor and review the results of such tests and the remedial measures, if any, taken by the Concessionaire in this behalf.

6.7 In respect of any defect or deficiency referred to in Paragraph 3 of Schedule- K, the Independent Engineer shall, in conformity with Good Industry Practice, specify the permissible limit of deviation or deterioration with reference to the Specifications and Standards and shall also specify the time limit for repair or rectification of any deviation or deterioration beyond the permissible limit.

6.8 The Independent Engineer shall determine if any delay has occurred in completion of repair or remedial works in accordance with the Agreement, and shall also determine the Damages, if any, payable by the Concessionaire to the Authority for such delay.

6.9 The Independent Engineer shall examine the request of the Concessionaire for closure of any lane(s) of the carriageway for undertaking maintenance/repair thereof, keeping in view the need to minimize disruption in traffic and the time required for completing such maintenance/repair in accordance with Good Industry Practice. It shall grant permission with such modifications, as it may deem necessary, within 3 (three) days of receiving a request from the Concessionaire. Upon expiry of the permitted period of closure, the Independent Engineer shall monitor the re-opening of such lane(s), and in case of delay, determine the Damages payable by the Concessionaire to the Authority under Clause 17.7.

6.10 The Independent Engineer shall monitor and review the curing of defects and deficiencies by the Concessionaire as set forth in Clause 19.4.

6.11 In the event that the Concessionaire notifies the Independent Engineer of any modifications that it proposes to make to the Project, the Independent Engineer shall review the same and send its comments to the Authority and the Concessionaire within 15 (fifteen) days of receiving the proposal.

6.12 The Independent Engineer shall undertake traffic sampling, as and when required by the Authority, under and in accordance with the provisions of this Agreement.

7 Termination

7.1 At any time, not earlier than 90 (ninety) days prior to Termination but not later than 15 (fifteen) days prior to such Termination, the Independent Engineer shall, in the presence of a representative of the Concessionaire, inspect the Project for determining compliance by the Concessionaire with the Divestment Requirements set forth in Clause 32.1 and, if required, cause tests to be carried out at the Concessionaire's cost for determining such compliance. If the Independent Engineer determines that the status of the Project is such that its repair and rectification would require a larger amount than the sum set forth in Clause 33.2, it shall recommend retention of the required amount in the Escrow Account and the period of retention thereof.

7.2 The Independent Engineer shall inspect the Project once in every 15 (fifteen) days during a period of 90 (ninety) days after Termination for determining the liability of the Concessionaire under Article 33, in respect of the defects or deficiencies specified therein.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date:29-Aug-2024 20:06:49

If any such defect or deficiency is found by the Independent Engineer, it shall make a report in reasonable detail and send it forthwith to the Authority and the Concessionaire.

8 Determination of costs and time

8.1 The Independent Engineer shall determine the costs, and/or their reasonableness, that are required to be determined by it under the Agreement.

8.2 The Independent Engineer shall determine the period, or any extension thereof, that is required to be determined by it under the Agreement.

9 Assistance in Dispute resolution

9.1 When called upon by either Party in the event of any Dispute, the Independent Engineer shall mediate and assist the Parties in arriving at an amicable settlement.

9.2 In the event of any disagreement between the Parties regarding the meaning, scope and nature of Good Industry Practice, as set forth in any provision of the Agreement, the Independent Engineer shall specify such meaning, scope and nature by issuing a reasoned written statement relying on good industry practice and authentic literature.

10 Other duties and functions

The Independent Engineer shall perform all other duties and functions specified in the Agreement.

11 Miscellaneous

11.1 The Independent Engineer shall notify its programmer of inspection to the Authority and to the Concessionaire, who may, in their discretion, depute their respective representatives to be present during the inspection.

11.2 A copy of all communications, comments, instructions, Drawings or Documents sent by the Independent Engineer to the Concessionaire pursuant to this TOR, and a copy of all the test results with comments of the Independent Engineer thereon shall be furnished by the Independent Engineer to the Authority forthwith.

11.3 The Independent Engineer shall obtain, and the Concessionaire shall furnish in 2 (two) …….. Copies thereof, all communications and reports required to be submitted, under this Agreement, by the Concessionaire to the Independent Engineer, whereupon the Independent Engineer shall send 1 (one) of the copies to the Authority along with its comments thereon.

11.4 The Independent Engineer shall retain at least one copy each of all Drawings and Documents received by it, including 'as-built' Drawings, and keep them in its safe custody.

11.5 Upon completion of its assignment hereunder, the Independent Engineer shall duly classify and list all Drawings, Documents, results of tests and other relevant records, and hand them over to the Authority or such other person as the Authority may specify, and obtain written receipt thereof. Two copies of the said documents shall also be furnished in their editable digital format or in such other medium or manner as may be acceptable to the Authority.

11.6 Wherever no period has been specified for delivery of services by the Independent Engineer, the Independent Engineer shall act with the efficiency and urgency necessary for discharging its functions in accordance with Good Industry Practice.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05811490(DSC PROXKey)
Date: 29-Aug-2024 20:06:49

SCHEDULE -O

(See Clause 25.1.2)

ESCROW AGREEMENT

THIS ESCROW AGREEMENT is entered into on this the day of 20__ AMONGST

1 ……..Limited, a company incorporated under the provisions of the Companies Act, 2013 and having its registered office at…….. (hereinafter referred to as the "Concessionaire" which expression shall, unless repugnant to the context or meaning thereof, include its successors, permitted assigns and substitutes);

2 ……(insert name and particulars of Lenders' Representative) and having its registered office at…… acting for and on behalf of the Senior Lenders as their duly authorized agent with regard to matters arising out of or in relation to this Agreement (hereinafter referred to as the "Lenders' Representative" which expression shall, unless repugnant to the context or meaning thereof, include its successors and substitutes);

3 ……..(insert name and particulars of the Escrow Bank) and having its registered office at…….. (hereinafter referred to as the "Escrow Bank" which expression shall, unless repugnant to the context or meaning thereof, include its successors and substitutes); and

4 The NATIONAL HIGHWAYS AUTHORITY OF INDIA, established under the National Highways Authority of India Act 1988, represented by its Chairman and having its principal offices at G-5&6, Sector-10, Dwarka, New Delhi-110075 (hereinafter referred to as the "Authority" which expression shall, unless repugnant to the context or meaning thereof, include its administrators, successors and assigns).

WHEREAS:

(A) The Authority has entered into a Concession Agreement dated…....with the Concessionaire (the "Concession Agreement") for the Construction work of 4-laning of Shahganj bypass end to Badi (Package-IV) of NH-146B from design km 102.000 to design km 142.357 (Design Length 40.357 km) under NH(O) in the State of Madhya Pradesh Project (the "Project") on design, build, operate and transfer (the "DBOT Annuity or Hybrid Annuity") basis, and a copy of which is annexed hereto and marked as Annex-A to form part of this Agreement.

(B) Senior Lenders have agreed to finance the Project in accordance with the terms and conditions set forth in the Financing Agreements.

(C) The Concession Agreement requires the Concessionaire to establish an Escrow Account, inter alia, on the terms and conditions stated therein.

NOW, THEREFORE, in consideration of the foregoing and the respective covenants and agreements set forth in this Agreement, the receipt and sufficiency of which are hereby acknowledged, and intending to be legally bound hereby, the Parties agree as follows:

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey (Code by WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

1 DEFINITIONS AND INTERPRETATION

1.1 Definitions

In this Agreement, the following words and expressions shall, unless repugnant to the context or meaning thereof, have the meaning hereinafter respectively assigned to them:

"Agreement" means this Escrow Agreement and any amendment thereto made in accordance with the provisions contained herein;

"Concession Agreement" means the Concession Agreement referred to in Recital (A) above and annexed hereto as Annex-A, and shall include all of its Recitals and Schedules and any amendments made thereto in accordance with the provisions contained in this behalf therein;

"Cure Period" means the period specified in this Agreement for curing any breach or default of any provision of this Agreement by the Concessionaire, and shall commence from the date on which a notice is delivered by the Authority or the Lenders' Representative, as the case may be, to the Concessionaire asking the latter to cure the breach or default specified in such notice;

"Escrow Account" means an escrow account established in terms of and under this Agreement, and shall include the Sub-Accounts;

"Escrow Default" shall have the meaning ascribed thereto in Clause 6.1;

"Lenders' Representative" means the person referred to as the Lenders' Representative in the foregoing Recitals;

"Parties" means the parties to this Agreement collectively and "Party" shall mean any of the Parties to this Agreement individually;

"Payment Date" means, in relation to any payment specified in Clause 4.1, the date(s) specified for such payment; and

"Sub-Accounts" means the respective sub-accounts of the Escrow Account, into which the monies specified in Clause 4.1 would be credited every month and paid out if due, and if not due in a month then appropriated proportionately in such month and retained in the respective sub-accounts and paid out therefrom on the Payment Date(s).

1.2 Interpretation

1.2.1 References to Lenders' Representative shall, unless repugnant to the context or meaning thereof, mean references to the Lenders' Representative, acting for and on behalf of Senior Lenders.

1.2.2 The words and expressions beginning with capital letters and defined in this Agreement shall have the meaning ascribed thereto herein, and the words and expressions used in this Agreement and not defined herein but defined in the Concession Agreement shall, unless repugnant to the context, have the meaning ascribed thereto in the Concession Agreement.

1.2.3 References to Clauses are, unless stated otherwise, references to Clauses of this Agreement.

1.2.4 The rules of interpretation stated in Clauses 1.2, 1.3 and 1.4 of the Concession Agreement shall apply, mutatis mutandis, to this Agreement.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

2 ESCROW ACCOUNT

2.1 Escrow Bank to act as trustee

2.1.1 The Concessionaire hereby appoints the Escrow Bank to act as trustee for the Authority, the Lenders' Representative and the Concessionaire in connection herewith and authorizes the Escrow Bank to exercise such rights, powers, authorities and discretion as are specifically delegated to the Escrow Bank by the terms hereof together with all such rights, powers, authorities and discretion as are reasonably incidental hereto, and the Escrow Bank accepts such appointment pursuant to the terms hereof.

2.1.2 The Concessionaire hereby declares that all rights, title and interest in and to the Escrow Account shall be vested in the Escrow Bank and held in trust for the Authority, the Lenders' Representative and the Concessionaire, and applied in accordance with the terms of this Agreement. No person other than the Authority, the Lenders' Representative and the Concessionaire shall have any rights hereunder as the beneficiaries of or as third party beneficiaries under this Agreement.

2.2 Acceptance of Escrow Bank

The Escrow Bank hereby agrees to act as such and to accept all payments and other amounts to be delivered to and held by the Escrow Bank pursuant to the provisions of this Agreement. The Escrow Bank shall hold and safeguard the Escrow Account during the term of this Agreement and shall treat the amount in the Escrow Account as monies deposited by the Concessionaire, Senior Lenders or the Authority with the Escrow Bank. In performing its functions and duties under this Agreement, the Escrow Bank shall act in trust for the benefit of, and as agent for, the Authority, the Lenders' Representative and the Concessionaire or their nominees, successors or assigns, in accordance with the provisions of this Agreement.

2.3 Establishment and operation of Escrow Account

2.3.1 Within 30 (thirty) days from the date of this Agreement, and in any case prior to the Appointed Date, the Concessionaire shall open and establish the Escrow Account with the (name of Branch) Branch of the Escrow Bank. The Escrow Account shall be denominated in Rupees.

2.3.2 The Escrow Bank shall maintain the Escrow Account in accordance with the terms of this Agreement and its usual practices and applicable regulations, and pay the maximum rate of interest payable to similar customers on the balance in the said account from time to time.

2.3.3 The Escrow Bank and the Concessionaire shall, after consultation with the Lenders' Representative, agree on the detailed mandates, terms and conditions, and operating procedures for the Escrow Account, but in the event of any conflict or inconsistency between this Agreement and such mandates, terms and conditions, or procedures, this Agreement shall prevail.

2.4 Escrow Bank's fee The Escrow Bank shall be entitled to receive its fee and expenses in an amount, and at such times, as may be agreed between the Escrow Bank and the Concessionaire. For the avoidance of doubt, such fee and expenses shall form part of the O&M Expenses and shall be appropriated from the Escrow Account in accordance with Clause 4.1.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed by PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

2.5 Rights of the Parties Save and except as otherwise provided in the Concession Agreement, the rights of the Authority, the Lenders' Representative and the Concessionaire in the monies held in the Escrow Account are set forth in their entirety in this Agreement and the Authority, the Lenders' Representative and the Concessionaire shall have no other rights against or to the monies in the Escrow Account.

2.6 Substitution of the Concessionaire The Parties hereto acknowledge and agree that upon substitution of the Concessionaire with the Nominated Company, pursuant to the Substitution Agreement, it shall be deemed for the purposes of this Agreement that the Nominated Company is a Party hereto and the Nominated Company shall accordingly be deemed to have succeeded to the rights and obligations of the Concessionaire under this Agreement on and with effect from the date of substitution of the Concessionaire with the Nominated Company.

3 DEPOSITS INTO ESCROW ACCOUNT

3.1 Deposits by the Concessionaire

3.1.1 The Concessionaire agrees and undertakes that it shall deposit into and/or credit the Escrow Account with:

(a) All monies received in relation to the Project from any source, including the Senior Lenders, lenders of Subordinated Debt and the Authority;

(b) All funds received by the Concessionaire from its shareholders, in any manner or form;

(c) Any other revenues; rentals, deposits or capital receipts, as the case may be, from or in respect of the Project; and

(d) All proceeds received pursuant to any insurance claims.

3.1.2 The Concessionaire may at any time make deposits of its other funds into the Escrow Account, provided that the provisions of this Agreement shall apply to such deposits.

3.2 Deposits by the Authority

The Authority agrees and undertakes that, as and when due and payable, it shall deposit into and/or credit the Escrow Account with:

(a) Grant and any other monies disbursed by the Authority to the Concessionaire;

(b) All revenues collected by the Authority in exercise of its rights under the Concession Agreement; and

(c) Termination Payments

Provided that, notwithstanding the provisions of Clause 4.1.1, the Authority shall be entitled to appropriate from the aforesaid amounts, any amounts due and payable to it by the Concessionaire, and the balance remaining shall be deposited into the Escrow Account.

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed,
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29 Aug 2014 20:06:49

3.3 Deposits by Senior Lenders

The Lenders' Representative agrees, confirms and undertakes that the Senior Lenders shall deposit into and/or credit the Escrow Account with all disbursements made by them in relation to or in respect of the Project; provided that notwithstanding anything to the contrary contained in this Agreement, the Senior Lenders shall be entitled to make direct

payments to the EPC Contractor under and in accordance with the express provisions contained in this behalf in the Financing Agreements.

3.4 Interest on deposits

The Escrow Bank agrees and undertakes that all interest accruing on the balances of the Escrow Account shall be credited to the Escrow Account; provided that the Escrow Bank shall be entitled to appropriate therefrom the fee and expenses due to it from the Concessionaire in relation to the Escrow Account and credit the balance remaining to the Escrow Account.

4 WITHDRAWALS FROM ESCROW ACCOUNT

4.1 Withdrawals during Concession Period

4.1.1 At the beginning of every month, or at such shorter intervals as the Lenders' Representative and the Concessionaire may by written instructions determine, the Escrow Bank shall withdraw amounts from the Escrow Account and appropriate them in the following order by depositing such amounts in the relevant Sub-Accounts for making due payments, and if such payments are not due in any month, then retain such monies in such Sub-Accounts and pay out therefrom on the Payment Date(s):

(a) All taxes due and payable by the Concessionaire for and in respect of the Project;

(b) Deleted;

(c) All payments relating to construction of the Project, subject to and in accordance with the conditions, if any, set forth in the Financing Agreements;

(d) O&M Expenses, subject to the ceiling, if any, set forth in the Financing Agreements;

(e) O&M Expenses and other costs and expenses incurred by the Authority in accordance with the provisions of the Concession Agreement, and certified by the Authority as due and payable to it;

(f) Any amounts due and payable to the Authority;

(g) Monthly proportionate provision of Debt Service due in an Accounting Year;

(h) all payments and Damages certified by the Authority as due and payable to it by the Concessionaire pursuant to the Concession Agreement;

(i) Monthly proportionate provision of debt service payments due in an Accounting Year in respect of Subordinated Debt;

(j) any reserve requirements set forth in the Financing Agreements; and

(k) Balance, if any, in accordance with the instructions of the Concessionaire.

4.1.2 No later than 60 (sixty) days prior to the commencement of each Accounting Year, the Concessionaire shall provide to the Escrow Bank, with prior written approval of the Lenders' Representative, details of the amounts likely to be required for the payment obligations set forth in this Clause 4.1; provided that such amounts may be subsequently modified, with prior written approval of the Lenders' Representative, if fresh information received during the course of the year makes such modification necessary.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey V 3.0-WD05811496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

4.2 Withdrawals upon Termination upon Termination of the Concession Agreement, all amounts standing to the credit of the Escrow Account shall, notwithstanding anything in this Agreement, be appropriated and dealt with in the following order:

(a) All taxes due and payable by the Concessionaire for and in respect of the Project;

(b) Deleted;

(c) 90% (ninety per cent) of Debt Due excluding Subordinated Debt;

(d) all payments and Damages certified by the Authority as due and payable to it by the Concessionaire pursuant to the Concession Agreement, including any claims in connection with or arising out of Termination;

(e) Retention and payments arising out of, or in relation to, liability for defects and deficiencies set forth in Article 33 of the Concession Agreement;

(f) Outstanding Debt Service including the balance of Debt Due;

(g) Outstanding Subordinated Debt;

(h) Incurred or accrued O&M Expenses;

(i) Any other payments required to be made under the Concession Agreement; and

(j) Balance, if any, in accordance with the instructions of the Concessionaire: Provided that the disbursements specified in Sub-clause (i) of this Clause 4.2 shall be undertaken only after the Vesting Certificate has been issued by the Authority.

4.3 Application of insufficient funds:

Funds in the Escrow Account shall be applied in the serial order of priority set forth in Clauses 4.1 and 4.2, as the case may be. If the funds available are not sufficient to meet all the requirements, the Escrow Bank shall apply such funds in the serial order of priority until exhaustion thereof.

4.4 Application of insurance proceeds

Notwithstanding anything in this Agreement, the proceeds from all insurance claims, except life and injury, shall be deposited into and/or credited to the Escrow Account and utilized for any necessary repair, reconstruction, reinstatement, replacement, improvement, delivery or installation of the Project, and the balance remaining, if any, shall be applied in accordance with the provisions contained in this behalf in the Financing Agreements.

4.5 Withdrawals during Suspension

Notwithstanding anything to the contrary contained in this Agreement, the Authority may exercise all or any of the rights of the Concessionaire during the period of Suspension under Article 30 of the Concession Agreement. Any instructions given by the Authority to the Escrow Bank during such period shall be complied with as if such instructions were given by the Concessionaire under this Agreement and all actions of the Authority hereunder shall be deemed to have been taken for and on behalf of the Concessionaire.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

5 OBLIGATIONS OF THE ESCROW BANK

5.1 Segregation of funds

Monies and other property received by the Escrow Bank under this Agreement shall, until used or applied in accordance with this Agreement, be held by the Escrow Bank in trust for the purposes for which they were received, and shall be segregated from other funds and property of the Escrow Bank.

5.2 Notification of balances

7(seven) business days prior to each Payment Date (and for this purpose the Escrow Bank shall be entitled to rely on an affirmation by the Concessionaire and/or the Lenders' Representative as to the relevant Payment Dates), the Escrow Bank shall notify the Lenders' Representative of the balances in the Escrow Account and Sub-Accounts as at the close of business on the immediately preceding business day.

5.3 Communications and notices

In discharge of its duties and obligations hereunder, the Escrow Bank:

(a) May, in the absence of bad faith or gross negligence on its part, rely as to any matters of fact which might reasonably be expected to be within the knowledge of the Concessionaire upon a certificate signed by or on behalf of the Concessionaire;

(b) may, in the absence of bad faith or gross negligence on its part, rely upon the authenticity of any communication or document believed by it to be authentic;

(c) shall, within 5 (five) business days after receipt, deliver a copy to the Lenders' Representative of any notice or document received by it in its capacity as the Escrow Bank from the Concessionaire or any other person hereunder or in connection herewith; and

(d) shall, within 5 (five) business days after receipt, deliver a copy to the Concessionaire of any notice or document received by it from the Lenders' Representative in connection herewith.

5.4 No set off

The Escrow Bank agrees not to claim or exercise any right of set off, banker's lien or other right or remedy with respect to amounts standing to the credit of the Escrow Account. For the avoidance of doubt, it is hereby acknowledged and agreed by the Escrow Bank that the monies and properties held by the Escrow Bank in the Escrow Account shall not be considered as part of the assets of the Escrow Bank and being trust property, shall in the case of bankruptcy or liquidation of the Escrow Bank, be wholly excluded from the assets of the Escrow Bank in such bankruptcy or liquidation.

5.5 Regulatory approvals

The Escrow Bank shall use its best efforts to procure, and thereafter maintain and comply with, all regulatory approvals required for it to establish and operate the Escrow Account. The Escrow Bank represents and warrants that it is not aware of any reason why such regulatory approvals will not ordinarily be granted to the Escrow Bank.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep

6 ESCROW DEFAULT

6.1 Escrow Default

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

6.1.1 Following events shall constitute an event of default by the Concessionaire (an "Escrow Default") unless such event of default has occurred as a result of Force Majeure or any act or omission of the Authority or the Lenders' Representative:

(a) the Concessionaire commits breach of this Agreement by failing to deposit any receipts into the Escrow Account as provided herein and fails to cure such breach by depositing the same into the Escrow Account within a Cure Period of 5 (five) business days;

(b) the Concessionaire causes the Escrow Bank to transfer funds to any account of the Concessionaire in breach of the terms of this Agreement and fails to cure such breach by depositing the relevant funds into the Escrow Account or any Sub-Account in which such transfer should have been made, within a Cure Period of 5 (five) business days; or

(c) the Concessionaire commits or causes any other breach of the provisions of this Agreement and fails to cure the same within a Cure Period of 5 (five) business days.

6.1.2 Upon occurrence of an Escrow Default, the consequences thereof shall be dealt with under and in accordance with the provisions of the Concession Agreement.

7 TERMINATION OF ESCROW AGREEMENT

7.1 Duration of the Escrow Agreement

This Agreement shall remain in full force and effect so long as any sum remains to be advanced or is outstanding from the Concessionaire in respect of the debt, guarantee or financial assistance received by it from the Senior Lenders, or any of its obligations to the Authority remain to be discharged, unless terminated earlier by consent of all the Parties or otherwise in accordance with the provisions of this Agreement.

7.2 Substitution of Escrow Bank

The Concessionaire may, by not less than 45 (forty five) days prior notice to the Escrow Bank, the Authority and the Lenders' Representative, terminate this Agreement and appoint a new Escrow Bank, provided that the new Escrow Bank is acceptable to the Lenders' Representative and arrangements are made satisfactory to the Lenders' Representative for transfer of amounts deposited in the Escrow Account to a new Escrow Account established with the successor Escrow Bank.

The termination of this Agreement shall take effect only upon coming into force of an Escrow Agreement with the substitute Escrow Bank.

7.3 Closure of Escrow Account

The Escrow Bank shall, at the request of the Concessionaire and the Lenders' Representative made on or after the payment by the Concessionaire of all outstanding amounts under the Concession Agreement and the Financing Agreements including the payments specified in Clause 4.2, and upon confirmation of receipt of such payment, close the Escrow Account and Sub- Accounts and pay any amount standing to the credit thereof to the Concessionaire. Upon closure of the Escrow Account hereunder, the Escrow Agreement shall be deemed to be terminated.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey V 3.0-WDU5611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

8 SUPPLEMENTARY ESCROW AGREEMENT

8.1 Supplementary escrow agreement

The Lenders' Representative and the Concessionaire shall be entitled to enter into a supplementary escrow agreement with the Escrow Bank providing, inter alia, for detailed procedures and documentation for withdrawals from Sub- Accounts pursuant to Clause 4.1.1 and for matters not covered under this Agreement such as the rights and obligations of Senior Lenders and lenders of Subordinated Debt, investment of surplus funds, restrictions on withdrawals by the Concessionaire in the event of breach of this Agreement or upon occurrence of an Escrow Default, procedures relating to operation of the Escrow Account and withdrawal therefrom, reporting requirements and any matters incidental thereto; provided that such supplementary escrow agreement shall not contain any provision which is inconsistent with this Agreement and in the event of any conflict or inconsistency between provisions of this Agreement and such supplementary escrow agreement, the provisions of this Agreement shall prevail.

9 INDEMNITIES

9.1 General indemnity

9.1.1 The Concessionaire will indemnify, defend and hold the Authority, Escrow Bank and the Senior Lenders, acting through the Lenders' Representative, harmless against any and all proceedings, actions and third party claims for any loss, damage, cost and expense arising out of any breach by the Concessionaire of any of its obligations under this Agreement or on account of failure of the Concessionaire to comply with Applicable Laws and Applicable Permits.

9.1.2 The Authority will indemnify, defend and hold the Concessionaire harmless against any and all proceedings, actions and third party claims for any loss, damage, cost and expense arising out of failure of the Authority to fulfil any of its obligations under this Agreement materially and adversely affecting the performance of the Concessionaire's obligations under the Concession Agreement or this Agreement other than any loss, damage, cost and expense arising out of acts done in discharge of their lawful functions by the Authority, its officers, servants and agents.

9.1.3 The Escrow Bank will indemnify, defend and hold the Concessionaire harmless against any and all proceedings, actions and third party claims for any loss, damage, cost and expense arising out of failure of the Escrow Bank to fulfil its obligations under this Agreement materially and adversely affecting the performance of the Concessionaire's obligations under the Concession Agreement other than any loss, damage, cost and expense, arising out of acts done in discharge of their lawful functions by the Escrow Bank, its officers, servants and agents.

9.2 Notice and contest of claims

In the event that any Party hereto receives a claim from a third party in respect of which it is entitled to the benefit of an indemnity under Clause 9.1 or in respect of which it is entitled to reimbursement (the "Indemnified Party"), it shall notify the other Party responsible for indemnifying such claim hereunder (the "Indemnifying Party") within 15 (fifteen) days of receipt of the claim and shall not settle or pay the claim without the prior approval of the Indemnifying Party, which approval shall not be unreasonably withheld or delayed. In the event that the Indemnifying Party wishes to contest or dispute the claim, it may conduct the

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516179(Pradeep
Signature Not Verified
Digitally Signed.
Name: (PROXKey v3.0 WD05611496(Wb PROXKey)
Date: 29-Aug-2014 20:06:49

proceedings in the name of the Indemnified Party and shall bear all costs involved in contesting the same. The Indemnified Party shall provide all cooperation and assistance in contesting any claim and shall sign all such writings and documents as the Indemnifying Party may reasonably require.

10 DISPUTE RESOLUTION

10.1 Dispute resolution

10.1.1 Any dispute, difference or claim arising out of or in connection with this Agreement, which is not resolved amicably, shall be decided finally by reference to arbitration to a Board of Arbitrators comprising one nominee of each Party to the dispute, and where the number of such nominees is an even number, the nominees shall elect another person to such Board. Such arbitration shall be held in accordance with the Rules of Arbitration of the International Centre for Alternative Dispute Resolution, New Delhi (the "Rules") or such other rules as may be mutually agreed by the Parties, and shall be subject to the provisions of the Arbitration and Conciliation Act, 1996.

10.1.2 The Arbitrators shall issue a reasoned award and such award shall be final and binding on the Parties. The place of arbitration shall be the capital of the State and the language of arbitration shall be English.

11. MISCELLANEOUS PROVISIONS

11.1 Governing law and jurisdiction

This Agreement shall be construed and interpreted in accordance with and governed by the laws of India, and the courts in the State shall have jurisdiction over all matters arising out of or relating to this Agreement.

11.2 Waiver of sovereign immunity The Authority unconditionally and irrevocably:

(a) agrees that the execution, delivery and performance by it of this Agreement constitute commercial acts done and performed for commercial purpose;

(b) agrees that, should any proceedings be brought against it or its assets, property or revenues in any jurisdiction in relation to this Agreement or any transaction contemplated by this Agreement, no immunity (whether by reason of sovereignty or otherwise) from such proceedings shall be claimed by or on behalf of the Authority with respect to its assets;

(c) waives any right of immunity which it or its assets, property or revenues now has, may acquire in the future or which may be attributed to it in any jurisdiction; and

(d) consents generally in respect of the enforcement of any judgment or award against it in any such proceedings to the giving of any relief or the issue of any process in any jurisdiction in connection with such proceedings (including the making, enforcement or execution against it or in respect of any assets, property or revenues whatsoever irrespective of their use or intended use of any order or judgment that may be made or given in connection therewith).

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516179(Pradeep

11.3 Priority of agreements

In the event of any conflict between the Concession Agreement and this Agreement, the provisions contained in the Concession Agreement shall prevail over this Agreement.

Signature Not Verified
Digitally Signed,
Name: PROXKey V 3.0-WD0561149(Wide PROXKey)
Date: 29-Aug-2014 20:06:49

11.4 Alteration of terms

All additions, amendments, modifications and variations to this Agreement shall be effectual and binding only if in writing and signed by the duly authorized representatives of the Parties.

11.5 Waiver

11.5.1 Waiver by any Party of a default by another Party in the observance and performance of any provision of or obligations under this Agreement:

(a) Shall not operate or be construed as a waiver of any other or subsequent default hereof or of other provisions of or obligations under this Agreement;

(b) shall not be effective unless it is in writing and executed by a duly authorized representative of the Party; and

(c) shall not affect the validity or enforceability of this Agreement in any manner.

11.5.2 Neither the failure by any Party to insist on any occasion upon the performance of the terms, conditions and provisions of this Agreement or any obligation thereunder nor time or other indulgence granted by any Party to another Party shall be treated or deemed as waiver of such breach or acceptance of any variation or the relinquishment of any such right hereunder.

11.6 No third party beneficiaries This Agreement is solely for the benefit of the Parties and no other person or entity shall have any rights hereunder.

11.7 Survival

11.7.1 Termination of this Agreement:

(a) shall not relieve the Parties of any obligations hereunder which expressly or by implication survive termination hereof; and

(b) except as otherwise provided in any provision of this Agreement expressly limiting the liability of either Party, shall not relieve either Party of any obligations or liabilities for loss or damage to the other Party arising out of, or caused by, acts or omissions of such Party prior to the effectiveness of such termination or arising out of such termination.

11.7.2 All obligations surviving the cancellation, expiration or termination of this Agreement shall only survive for a period of 3 (three) years following the date of such termination or expiry of this Agreement.

11.8 **Severability**

If for any reason whatever any provision of this Agreement is or becomes invalid, illegal or unenforceable or is declared by any court of competent jurisdiction or any other instrumentality to be invalid, illegal or unenforceable, the validity, legality or enforceability of the remaining provisions shall not be affected in any manner, and the Parties will negotiate in good faith with a view to agreeing to one or more provisions which may be substituted for such invalid, unenforceable or illegal provisions, as nearly as is practicable to such invalid, illegal or unenforceable provision. Failure to agree upon any such provisions shall not be subject to dispute resolution under Clause 10.1 of this Agreement or otherwise.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey (v 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

11.9 Successors and assigns

This Agreement shall be binding on and shall inure to the benefit of the Parties and their respective successors and permitted assigns.

11.10 Notices

All notices or other communications to be given or made under this Agreement shall be in writing and shall either be delivered personally or sent by courier or registered post with an additional copy to be sent by facsimile or e-mail. The address for service of each Party, its facsimile number and e-mail are set out under its name on the signing pages hereto. A notice shall be effective upon actual receipt thereof, save that where it is received after 5.30 (five thirty) p.m. on a business day, or on a day that is not a business day, the notice shall be deemed to be received on the first business day following the date of actual receipt. Without prejudice to the foregoing, a Party giving or making a notice or communication by facsimile or e-mail shall promptly deliver a copy thereof personally, or send it by courier or registered post to the addressee of such notice or communication. It is hereby agreed and acknowledged that any Party may by notice change the address to which such notices and communications to it are to be delivered or mailed. Such change shall be effective when all the Parties have notice of it.

11.11 **Language**

All notices, certificates, correspondence and proceedings under or in connection with this Agreement shall be in English.

11.12 **Authorized representatives**

Each of the Parties shall, by notice in writing, designate their respective authorized representatives through whom only all communications shall be made. A Party hereto shall be entitled to remove and/or substitute or make fresh appointment of such authorized representative by similar notice.

11.13 Original Document

This Agreement may be executed in four counterparts, each of which when executed and delivered shall constitute an original of this Agreement.

IN WITNESS WHEREOF THE PARTIES HAVE EXECUTED AND DELIVERED THIS AGREEMENT AS OF THE DATE FIRST ABOVE WRITTEN.

THE COMMON SEAL OF CONCESSIONAIRE has been affixed pursuant to the resolution passed by the Board of Directors of the Concessionaire at its meeting held on the day of 20 hereunto affixed in the presence of , Director, who has

SIGNED SEALED AND DELIVERED
For and on behalf of
SENIOR LENDERS by the
Lender's representative:

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

signed these presents in token thereof and Company Secretary / Authorized Officer who has countersigned the same in token thereof[¥]

(Signature)

(Name)

(Designation)

(Address)

(Fax No.)

(E-mail address)

(Signature)

(Name)

(Designation)

(Address)

(Fax N°)

(E-mail address)

SIGNED, SEALED AND

DELIVERED

For and on behalf of

THE ESCROW BANK by

(Signature)

(Name)

(Designation)

(Address)

(Fax No.)

(E-mail address)

SIGNED, SEALED AND

DELIVERED

for and on behalf of

THE AUTHORITY by:

(Signature)

(Name)

(Designation)

(Address)

(Fax No.)

(E-mail address)

SIGNED, SEALED

In the presence of:

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

[¥]To be affixed in accordance with the articles of association of the Concessionaire and the resolution passed by its Board of Directors.

SCHEDULE - P

(See Clause 27.2.1)

PANEL OF CHARTERED ACCOUNTANTS

1 Panel of Chartered Accountants

Pursuant to the provisions of Clause 27.2.1 of the Agreement, the Authority and the Concessionaire shall prepare a mutually agreed panel of 5 (five) reputable firms of Chartered Accountants having their registered offices in India (the "Panel of Chartered Accountants"). The criteria for preparing such Panel and the procedure to be adopted in this behalf shall be as set forth in this Schedule-P.

2 Invitation for empanelment

2.1 The Authority shall invite offers from all reputed firms of Chartered Accountants who fulfil the following eligibility criteria, namely:

(a) the firm should have conducted statutory audit of the annual accounts of at least one hundred companies registered under the Companies Act, 1956, including any re-enactment or amendment thereof, of which at least ten should have been public sector undertakings;

(b) The firm should have at least 5 (five) practicing Chartered Accountants on its rolls, each with a minimum experience of ten years in the profession;

(c) The firm or any of its partners should not have been disqualified or black-listed by the Comptroller and Auditor General of India or the Authority; and

(d) The firm should have an office in the State or in an adjacent State with at least 2 (two) practicing Chartered Accountants on its rolls in such State.

2.2 Interested firms meeting the eligibility criteria shall be required to submit a statement of their capability including the bio-data of all the practicing Chartered Accountants on its rolls. In particular, each firm shall be required to furnish year-wise information relating to the names of all the companies with an annual turnover exceeding Rs. 25,00,00,000 (Rs. twenty five crore) whose annual accounts were audited by such firm in any of the preceding 5 (five) Accounting Years

3 Evaluation and selection

3.1 The information furnished by each firm shall be scrutinized and evaluated by the Authority and 1 (one) point shall be awarded for each annual audit of the companies specified in Paragraph 2.2 above. (For the avoidance of doubt and by way of illustration, a firm which has conducted audit of the annual accounts of any such company for 5 (five) years shall be awarded 5 (five) points).

3.2 The Authority shall prepare a list of all the eligible firms along with the points scored by each such firm and 5 (five) firms scoring the highest points shall be identified and included in the draft Panel of Chartered Accountants.

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS32307130516179(Pradeep
Signature Not Verified
Digitally Signed,
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

4 Consultation with the Concessionaire

The Authority shall convey the aforesaid panel of firms to the Concessionaire for scrutiny and comments, if any. The Concessionaire shall be entitled to scrutinize the relevant records

of the Authority to ascertain whether the selection of firms has been undertaken in accordance with the prescribed procedure and it shall send its comments, if any, to the Authority within 15 (fifteen) days of receiving the aforesaid panel.

5 Mutually agreed panel

5.1 The Authority shall, after considering all relevant factors including the comments, if any, of the Concessionaire, finalize and constitute a panel of 5 (five) firms which shall be deemed to be the mutually agreed Panel of Chartered Accountants.

5.2 After completion of every 5 (five) years from the date of preparing the mutually agreed Panel of Chartered Accountants, or such earlier period as may be agreed between the Authority and the Concessionaire, a new panel shall be prepared in accordance with the provisions of this Schedule-P.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

SCHEDULE – Q

(See Clause 32.4)

VESTING CERTIFICATE

1 The Chairman, National Highways Authority of India (the **"Authority"**) refers to the Concession Agreement dated …….. (the **"Agreement"**) entered into between the Authority and ……. (the **"Concessionaire"**) for Construction work of 4-laning of Shahganj bypass end to Badi (Package-IV) of NH-146B from design km 102.000 to design km 142.357 (Design Length 40.357 km) under NH(O) in the State of Madhya Pradesh (the **"Project Highway"**) on design, build, operate and transfer (**"DBOT Annuity or Hybrid Annuity"**) basis.

2 The Authority hereby acknowledges compliance and fulfilment by the Concessionaire of the Divestment Requirements set forth in Clause 32.1 of the Agreement on the basis that upon issue of this Vesting Certificate, the Authority shall be deemed to have acquired, and all title and interest of the Concessionaire in or about the Project shall be deemed to have vested unto the Authority, free from any encumbrances, charges and liens whatsoever.

3 Notwithstanding anything to the contrary contained hereinabove, it shall be a condition of this Vesting Certificate that nothing contained herein shall be construed or interpreted as waiving the obligation of the Concessionaire to rectify and remedy any defect or deficiency in any of the Divestment Requirements and/or relieving the Concessionaire in any manner of the same.

Signed this…… day of……., 20……. At……..

AGREED, ACCEPTED AND SIGNED	SIGNED, SEALED AND DELIVERED
For and on behalf of	for and on behalf of
CONCESSIONAIRE by:	AUTHORITY by:
(Signature)	(Signature)
(Name)	(Name)
(Designation)	(Designation)
(Address)	(Address)

In the presence of:

1. Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

2. Signature Not Verified
Digitally Signed,
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

SCHEDULE - R

(See Clause 34.3.1)

SUBSTITUTION AGREEMENT

THIS SUBSTITUTION AGREEMENT is entered into on this the……day of……..20…….

AMONGST

1 The NATIONAL HIGHWAYS AUTHORITY OF INDIA, established under the National Highways Authority of India Act 1988, represented by its Chairman and having its principal offices at G-5 & 6, Sector – 10, Dwarka, New Delhi - 110075 (Hereinafter referred to as the "Authority" which expression shall unless repugnant to the context or meaning thereof include its administrators, successors and assigns);

2 …….Limited, a company incorporated under the provisions of the Companies Act, 2013 and having its registered office at ……. (Hereinafter referred to as the **"Concessionaire"** which expression shall unless repugnant to the context or meaning thereof include its successors and permitted assigns and substitutes);

3 …….. (insert name and particulars of Lenders' Representative) and having its registered office at……., acting for and on behalf of the Senior Lenders as their duly authorized agent with regard to matters arising out of or in relation to this Agreement (hereinafter referred to as the "**Lenders' Representative"**, which expression shall unless repugnant to the context or meaning thereof include its successors and substitutes);

WHEREAS:

(A) The Authority has entered into a Concession Agreement dated……. With the Concessionaire (the **"Concession Agreement"**) for the Construction work of 4-laning of Shahganj bypass end to Badi (Package-IV) of NH-146B from design km 102.000 to design km 142.357 (Design Length 40.357 km) under NH(O) in the State of Madhya Pradesh (the **"Project")** on design, build, operate and transfer basis (the **"DBOT Annuity or Hybrid Annuity"),** and a copy of which is annexed hereto and marked as Annex-A to form part of this Agreement.

(B) Senior Lenders have agreed to finance the Project in accordance with the terms and conditions set forth in the Financing Agreements.

(C) Senior Lenders have requested the Authority to enter into this Substitution Agreement for securing their interests through assignment, transfer and substitution of the Concession to a Nominated Company in accordance with the provisions of this Agreement and the Concession Agreement.

(D) In order to enable implementation of the Project including its financing, construction, operation and maintenance, the Authority has agreed and undertaken to transfer and assign the Concession to a Nominated Company in accordance with the terms and conditions set forth in this Agreement and the Concession Agreement.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey v1.5.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

NOW, THEREFORE, in consideration of the foregoing and the respective covenants and agreements set forth in this Agreement, the receipt and sufficiency of which is hereby acknowledged, and intending to be legally bound hereby, the Parties agree as follows:

1 DEFINITIONS AND INTERPRETATION

1.1 Definitions

In this Substitution Agreement, the following words and expressions shall, unless repugnant to the context or meaning thereof, have the meaning hereinafter respectively assigned to them: **"Agreement"** means this Substitution Agreement and any amendment thereto made in accordance with the provisions contained in this Agreement;

"Financial Default" means occurrence of a material breach of the terms and conditions of the Financing Agreements or a continuous default in Debt Service by the Concessionaire for a minimum period of 3 (three) months;

"Lenders' Representative" means the person referred to as the Lenders' Representative in the foregoing Recitals;

"**Nominated Company"** means a company, incorporated under the provisions of the Companies Act, 1956, including any re-enactment or amendment thereof, selected by the Lenders' Representative, on behalf of Senior Lenders, and proposed to the Authority for assignment/transfer of the Concession as provided in this Agreement;

"Notice of Financial Default" shall have the meaning ascribed thereto in Clause 3.2.1; and

"Parties" means the parties to this Agreement collectively and "Party" shall mean any of the Parties to this Agreement individually.

1.2 Interpretation

1.2.1 References to Lenders' Representative shall, unless repugnant to the context or meaning thereof, mean references to the Lenders' Representative, acting for and on behalf of Senior Lenders.

1.2.2 References to Clauses are, unless stated otherwise, references to Clauses of this Agreement.

1.2.3 The words and expressions beginning with capital letters and defined in this Agreement shall have the meaning ascribed thereto herein, and the words and expressions used in this Agreement and not defined herein but defined in the Concession Agreement shall, unless repugnant to the context, have the meaning ascribed thereto in the Concession Agreement.

1.2.4 The rules of interpretation stated in Clauses 1.2, 1.3 and 1.4 of the Concession Agreement shall apply, mutatis mutandis, to this Agreement.

2 ASSIGNMENT

2.1 Assignment of rights and title

The Concessionaire hereby agrees to assign the rights, title and interest in the Concession to, and in favor of, the Lenders' Representative pursuant to and in accordance with the provisions of this Agreement and the Concession Agreement by way of security in respect of financing by the Senior Lenders under the Financing Agreements.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey (Version 3.0 Web05611496(MD:PROXKey)
Date: 29-Aug-2014 20:06:49

3 SUBSTITUTION OF THE CONCESSIONAIRE

3.1 Rights of substitution

3.1.1 Pursuant to the rights, title and interest assigned under Clause 2.1, the Lenders' Representative shall be entitled to substitute the Concessionaire by a Nominated Company under and in accordance with the provisions of this Agreement and the Concession Agreement.

3.1.2 The Authority hereby agrees to substitute the Concessionaire by endorsement on the Concession Agreement in favor of the Nominated Company selected by the Lenders' Representative in accordance with this Agreement. For the avoidance of doubt, the Senior Lenders or the Lenders' Representative shall not be entitled to operate and maintain the Project as Concessionaire either individually or collectively.

3.2 Substitution upon occurrence of Financial Default

3.2.1 Upon occurrence of a Financial Default, the Lenders' Representative may issue a notice to the Concessionaire (the "Notice of Financial Default") along with particulars thereof, and send a copy to the Authority for its information and record. A Notice of Financial Default under this Clause 3 shall be conclusive evidence of such Financial Default and it shall be final and binding upon the Concessionaire for the purposes of this Agreement.

3.2.2 Upon issue of a Notice of Financial Default hereunder, the Lenders' Representative may, without prejudice to any of its rights or remedies under this Agreement or the Financing Agreements, substitute the Concessionaire by a Nominated Company in accordance with the provisions of this Agreement.

3.2.3 At any time after the Lenders' Representative has issued a Notice of Financial Default, it may by notice require the Authority to suspend all the rights of the Concessionaire and undertake the operation and maintenance of the Project in accordance with the provisions of Article 30 of the Concession Agreement, and upon receipt of such notice, the Authority shall undertake Suspension under and in accordance with the provisions of the Concession Agreement. The aforesaid Suspension shall be revoked upon substitution of the Concessionaire by a Nominated Company, and in the event such substitution is not completed within 180 (one hundred and eighty) days from the date of such Suspension, the Authority may terminate the Concession Agreement forthwith by issuing a Termination Notice in accordance with the provisions of the Concession Agreement; provided that upon written request from the Lenders' Representative and the Concessionaire, the Authority may extend the aforesaid period of 180 (one hundred and eighty) days by a period not exceeding 90 (ninety) days. For the avoidance of doubt, the Authority expressly agrees and undertakes to terminate the Concession Agreement forthwith, upon receipt of a written request from the Lenders' Representative at any time after 240 (two hundred and forty) days from the date of Suspension hereunder.

3.3 Substitution upon occurrence of Concessionaire Default

3.3.1 Upon occurrence of a Concessionaire Default, the Authority shall by a notice inform the Lenders' Representative of its intention to issue a Termination Notice and grant 15 (fifteen) days' time to the Lenders' Representative to make a representation, stating the intention to substitute the Concessionaire by a Nominated Company.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name:PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

3.3.2 In the event that the Lenders' Representative makes a representation to the Authority within the period of 15 (fifteen) days specified in Clause 3.3.1, stating that it intends to substitute

the Concessionaire by a Nominated Company, the Lenders' Representative shall be entitled to undertake and complete the substitution of the Concessionaire by a Nominated Company in accordance with the provisions of this Agreement within a period of 180 (one hundred and eighty) days from the date of such representation, and the Authority shall either withhold Termination or undertake Suspension for the aforesaid period of 180 (one hundred and eighty) days; provided that upon written request from the Lenders' Representative and the Concessionaire, the Authority shall extend the aforesaid period of 180 (one hundred and eighty) days by a period not exceeding 90 (ninety) days; provided further that the Lenders' Representative may at any time withdraw its representation hereunder and upon such withdrawal, the Authority may terminate this Agreement in accordance with the provisions hereof.

3.4 Procedure for substitution

3.4.1 The Authority and the Concessionaire hereby agree that on or after the date of Notice of Financial Default or the date of representation to the Authority under Clause 3.3.2, as the case may be, the Lenders' Representative may, without prejudice to any of the other rights or remedies of the Senior Lenders, invite, negotiate and procure offers, either by private negotiations or public auction or tenders for the take over and transfer of the Project including the Concession to the Nominated Company upon such Nominated Company's assumption of the liabilities and obligations of the Concessionaire towards the Authority under the Concession Agreement and towards the Senior Lenders under the Financing Agreements.

3.4.2 To be eligible for substitution in place of the Concessionaire, the Nominated Company shall be required to fulfil the eligibility criteria that were laid down by the Authority for short listing the bidders for award of the Concession; provided that the Lenders' Representative may represent to the Authority that all or any of such criteria may be waived in the interest of the Project, and if the Authority determines that such waiver shall not have any material adverse effect on the Project, it may waive all or any of such eligibility criteria.

3.4.3 Upon selection of a Nominated Company, the Lenders' Representative shall request the Authority to:

(a) Accede to transfer to the Nominated Company the right to construct, operate and maintain the Project in accordance with the provisions of the Concession Agreement;

(b) Endorse and transfer the Concession to the Nominated Company, on the same terms and conditions, for the residual Concession Period; and

(c) Enter into a Substitution Agreement with the Lenders' Representative and the Nominated Company on the same terms as are contained in this Agreement.

3.4.4 If the Authority has any objection to the transfer of Concession in favor of the Nominated Company in accordance with this Agreement, it shall within 15 (fifteen) days from the date of proposal made by the Lenders' Representative, give a reasoned order after hearing the Lenders' Representative. If no such objection is raised by the Authority, the Nominated Company shall be deemed to have been accepted. The Authority shall thereupon transfer and endorse the Concession within 15 (fifteen) days of its acceptance deemed acceptance of the Nominated Company; provided that in the event of such objection by the Authority, the Lenders' Representative may propose another Nominated Company whereupon the

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS230713051619(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey v3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2014 20:06:49

procedure set forth in this Clause 3.4 shall be followed for substitution of such Nominated Company in place of the Concessionaire.

3.4.5 The transfer of Concession hereunder to a Nominated Company may, notwithstanding anything to the contrary in this Agreement and the Concession Agreement, be undertaken by transfer of no less than 75% (seventy five per cent) of the equity of the Concessionaire to the Nominated Company, and upon such transfer hereunder, the Concessionaire shall be deemed to be the Nominated Company under and in accordance with the provisions of this Agreement and the Concession Agreement.

3.5 Selection to be binding

The decision of the Lenders' Representative and the Authority in selection of the Nominated Company shall be final and binding on the Concessionaire. The Concessionaire irrevocably agrees and waives any right to challenge the actions of the Lenders' Representative or the Senior Lenders or the Authority taken pursuant to this Agreement including the transfer/assignment of the Concession in favor of the Nominated Company. The Concessionaire agrees and confirms that it shall not have any right to seek revaluation of assets of the Project or the Concessionaire's shares. It is hereby acknowledged by the Parties that the rights of the Lenders' Representative are irrevocable and shall not be contested in any proceedings before any court or Authority and the Concessionaire shall have no right or remedy to prevent, obstruct or restrain the Authority or the Lenders' Representative from effecting or causing the transfer by substitution and endorsement of the Concession as requested by the Lenders' Representative.

4 PROJECT AGREEMENTS

4.1 Substitution of Nominated Company in Project Agreements

The Concessionaire shall ensure and procure that each Project Agreement contains provisions that entitle the Nominated Company to step into such Project Agreement, in its discretion, in place and substitution of the Concessionaire in the event of such Nominated Company's assumption of the liabilities and obligations of the Concessionaire under the Concession Agreement.

5 TERMINATION OF CONCESSION AGREEMENT

5.1 Termination upon occurrence of Financial Default

At any time after issue of a Notice of Financial Default, the Lenders' Representative may by a notice in writing require the Authority to terminate the Concession Agreement forthwith, and upon receipt of such notice, the Authority shall undertake Termination under and in accordance with the provisions of Article 31 of the Concession Agreement.

5.2 Termination when no Nominated Company is selected

In the event that no Nominated Company acceptable to the Authority is selected and recommended by the Lenders' Representative within the period of 180 (one hundred and eighty) days or any extension thereof as set forth in Clause 3.3.2, the Authority may terminate the Concession Agreement forthwith in accordance with the provisions thereof.

5.3 Realization of Debt Due

The Authority and the Concessionaire hereby acknowledge and agree that, without prejudice to their any other right or remedy, the Lenders' Representative is entitled to

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

receive from the Concessionaire, without any further reference to or consent of the Concessionaire, the Debt Due upon Termination of the Concession Agreement. For realization of the Debt Due, the Lenders' Representative shall be entitled to make its claim from the Escrow Account in accordance with the provisions of the Concession Agreement and the Escrow Agreement.

6 DURATION OF THE AGREEMENT

6.1 Duration of the Agreement

This Agreement shall come into force from the date hereof and shall expire at the earliest to occur of the following events:

(a) Termination of the Agreement; or

(b) No sum remains to be advanced and no sum are outstanding to the Senior Lenders, under the Financing Agreements.

7 INDEMNITY

7.1 General indemnity

7.1.1 The Concessionaire will indemnify, defend and hold the Authority and the Lenders' Representative harmless against any and all proceedings, actions and third party claims for any loss, damage, cost and expense of whatever kind and nature arising out of any breach by the Concessionaire of any of its obligations under this Agreement or on account of failure of the Concessionaire to comply with Applicable Laws and Applicable Permits.

7.1.2 The Authority will indemnify, defend and hold the Concessionaire harmless against any and all proceedings, actions and third party claims for any loss, damage, cost and expense arising out of failure of the Authority to fulfil any of its obligations under this Agreement, materially and adversely affecting the performance of the Concessionaire's obligations under the Concession Agreement or this Agreement, other than any loss, damage, cost and expense, arising out of acts done in discharge of their lawful functions by the Authority, its officers, servants and agents.

7.1.3 The Lenders' Representative will indemnify, defend and hold the Concessionaire harmless against any and all proceedings, actions and third party claims for any loss, damage, cost and expense arising out of failure of the Lenders' Representative to fulfil its obligations under this Agreement, materially and adversely affecting the performance of the Concessionaire's obligations under the Concession Agreement, other than any loss, damage, cost and expense, arising out of acts done in discharge of their lawful functions by the Lenders' Representative, its officers, servants and agents.

7.2 Notice and contest of claims

In the event that any Party hereto receives a claim from a third party in respect of which it is entitled to the benefit of an indemnity under Clause 7.1 or in respect of which it is entitled to reimbursement (the "Indemnified Party"), it shall notify the other Party responsible for indemnifying such claim hereunder (the "Indemnifying Party") within 15 (fifteen) days of receipt of the claim and shall not settle or pay the claim without the prior approval of the Indemnifying Party, such approval not to be unreasonably withheld or delayed. In the event that the Indemnifying Party wishes to contest or dispute the claim, it may conduct the proceedings in the name of the Indemnified Party and shall bear all costs involved in contesting the same. The Indemnified Party shall provide all cooperation and assistance in

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed by
Name: PROXKey V 3.0-WD050111496(WD PROXKey)
Date: 29 Aug 2024 20:06:49

contesting any claim and shall sign all such writings and documents as the Indemnifying Party may reasonably require.

8 DISPUTE RESOLUTION

8.1 Dispute resolution

8.1.1 Any dispute, difference or claim arising out of or in connection with this Agreement which is not resolved amicably shall be decided by reference to arbitration to a Board of Arbitrators comprising one nominee each of the Authority, Concessionaire and the Lenders' Representative. Such arbitration shall be held in accordance with the Rules of Arbitration of the International Centre for Alternative Dispute Resolution, New Delhi (the "**Rules**") or such other rules as may be mutually agreed by the Parties, and shall be subject to provisions of the Arbitration and Conciliation Act, 1996.

8.1.2 The Arbitrators shall issue a reasoned award and such award shall be final and binding on the Parties. The place of arbitration shall be the capital of the State and the language of arbitration shall be English.

9 MISCELLANEOUS PROVISIONS

9.1 Governing law and jurisdiction

This Agreement shall be construed and interpreted in accordance with and governed by the laws of India, and the courts in the New Delhi shall have jurisdiction over all matters arising out of or relating to this Agreement.

9.2 Waiver of sovereign immunity

The Authority unconditionally and irrevocably:

(a) agrees that the execution, delivery and performance by it of this Agreement constitute commercial acts done and performed for commercial purpose;

(b) agrees that, should any proceedings be brought against it or its assets, property or revenues in any jurisdiction in relation to this Agreement or any transaction contemplated by this Agreement, no immunity (whether by reason of sovereignty or otherwise) from such proceedings shall be claimed by or on behalf of the Authority with respect to its assets;

(c) waives any right of immunity which it or its assets, property or revenues now has, may acquire in the future or which may be attributed to it in any jurisdiction; and

(d) consents generally in respect of the enforcement of any judgment or award against it in any such proceedings to the giving of any relief or the issue of any process in any jurisdiction in connection with such proceedings (including the making, enforcement or execution against it or in respect of any assets, property or revenues whatsoever irrespective of their use or intended use of any order or judgment that may be made or given in connection therewith).

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep

9.3 Priority of agreements

In the event of any conflict between the Concession Agreement and this Agreement, the provisions contained in the Concession Agreement shall prevail over this Agreement.

Signature Not Verified
Digitally Signed,
Name: PROXKey v3.0 WD05611496(WD PROXKey)
Date: 29 Aug 2021 20:06:49

9.4 Alteration of terms

All additions, amendments, modifications and variations to this Agreement shall be effectual and binding only if in writing and signed by the duly authorized representatives of the Parties.

9.5 Waiver

9.5.1 Waiver by any Party of a default by another Party in the observance and performance of any provision of or obligations under this Agreement:

(a) Shall not operate or be construed as a waiver of any other or subsequent default hereof or of other provisions of or obligations under this Agreement;

(b) Shall not be effective unless it is in writing and executed by a duly authorized representative of the Party; and

(c) Shall not affect the validity or enforceability of this Agreement in any manner.

9.5.2 Neither the failure by either Party to insist on any occasion upon the performance of the terms, conditions and provisions of this Agreement or any obligation thereunder nor time or other indulgence granted by a Party to another Party shall be treated or deemed as waiver of such breach or acceptance of any variation or the relinquishment of any such right hereunder.

9.6 **No third party beneficiaries**

This Agreement is solely for the benefit of the Parties and no other person or entity shall have any rights hereunder.

9.7 Survival

9.7.1 Termination of this Agreement:

(a) Shall not relieve the Parties of any obligations hereunder which expressly or by implication survive termination hereof; and

(b) except as otherwise provided in any provision of this Agreement expressly limiting the liability of either Party, shall not relieve either Party of any obligations or liabilities for loss or damage to the other Party arising out of or caused by acts or omissions of such Party prior to the effectiveness of such termination or arising out of such termination.

9.7.2 All obligations surviving the cancellation, expiration or termination of this Agreement shall only survive for a period of 3 (three) years following the date of such termination or expiry of this Agreement.

9.8 Severability

If for any reason whatever any provision of this Agreement is or becomes invalid, illegal or unenforceable or is declared by any court of competent jurisdiction or any other instrumentality to be invalid, illegal or unenforceable, the validity, legality or enforceability of the remaining provisions shall not be affected in any manner, and the Parties will negotiate in good faith with a view to agreeing to one or more provisions which may be substituted for such invalid, unenforceable or illegal provisions, as nearly as is practicable to such invalid, illegal or unenforceable provision. Failure to agree upon any such

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS230713051619(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey v3.0 (WIN0611496MD)(PROXKey)
Date: 29-Aug-2024 20:06:49

provisions shall not be subject to dispute resolution under Clause 8 of this Agreement or otherwise.

9.9 Successors and assigns

This Agreement shall be binding on and shall inure to the benefit of the Parties and their respective successors and permitted assigns.

9.10 Notices

All notices or other communications to be given or made under this Agreement shall be in writing, shall either be delivered personally or sent by courier or registered post with an additional copy to be sent by facsimile or e-mail. The address for service of each Party, its facsimile number and e-mail address are set out under its name on the signing pages hereto. A notice shall be effective upon actual receipt thereof, save that where it is received after 5.30 (five thirty) p.m. on any day, or on a day that is a public holiday, the notice shall be deemed to be received on the first working day following the date of actual receipt. Without prejudice to the foregoing, a Party giving or making a notice or communication by facsimile or e-mail shall promptly deliver a copy thereof personally, or send it by courier or registered post to the addressee of such notice or communication. It is hereby agreed and acknowledged that any Party may by notice change the address to which such notices and communications to it are to be delivered or mailed. Such change shall be effective when all the Parties have notice of it.

9.11 Language

All notices, certificates, correspondence and proceedings under or in connection with this Agreement shall be in English.

9.12 Authorized representatives

Each of the Parties shall by notice in writing designate their respective authorized representatives through whom only all communications shall be made. A Party hereto shall be entitled to remove and/or substitute or make fresh appointment of such authorized representative by similar notice.

9.13 Original Document

This Agreement may be executed in three counterparts, each of which when executed and delivered shall constitute an original of this Agreement.

IN WITNESS WHEREOF THE PARTIES HAVE EXECUTED AND DELIVERED THIS AGREEMENT AS OF THE DATE FIRST ABOVE WRITTEN

THE COMMON SEAL OF CONCESSIONAIRE has been affixed pursuant to the resolution passed by the Board of Directors of the Concessionaire at its meeting held on the……..day of the ……20……..here unto affixed in to the presence of……the Director, who has signed these presents in token thereof, ……Company Secretary /Authorized Officer who has countersigned the same in token thereof[¥].	SIGNED, SEALED AND DELIVERED For and behalf of THE AUTHORITY by:

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619(Pradeep
Signature Not Verified
Digitally Signed,
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

[¥]To be affixed in accordance with the articles of association of the Concessionaire and the resolution passed by its Board of Directors

(Signature) (Name) (Designation) (Address) (Fax No.) (e-mail address)	(Signature) (Name) (Designation) (Address) (Fax No.) (e-mail address)

SIGNED, SEALED AND DELIVERED

For and on behalf of

SENIOR LENDERS by the

Lenders' Representative:

(Signature)

(Name)

(Designation)

(Address)

(Fax No.)

(E-mail address)

In the presence of: 1. 2.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

SCHEDULE – S

Procedure for Dispute Resolution Board

The parties to the Concession Agreement mutually agree as follows:

(1) The Board shall comprise of three Members having experience in the field of construction or have been involved in the Works related to construction and with the interpretation of contractual documents. One Member shall be selected by each of the Authority and the Concessionaire from the list maintained by NHAI hosted on its website (www.nhai.gov.in). In the event the parties fail to select the member within 28 days of the date of the signing of Concession Agreement, in that eventuality, upon the request of either or both parties such Member shall be selected by SAROD within 14 days. The third Member shall be selected by the other two members from the same list. If the two Members selected by or on behalf of the parties fail to select the third Member within 14 days after the later of their selections, then upon the request of either or both parties such third Member shall be selected by SAROD within 14 days. The third Member shall serve as Chairman of the Board

(2) The Board shall be constituted when each of the three Board Members has signed a Board Member's declaration of Acceptance as required by the DRB's rules and procedures (which, along with the declaration of acceptance form, are attached as Annexure herewith).

(3) In the event of death, disability, or resignation of any Member, such Member shall be replaced in the same manner as the Member being replaced was selected. If for any other reason, a Member fails or is unable to serve, the Chairman (or failing the action of the Chairman then either of the other Members) shall inform the Parties and such non-serving Member shall be replaced in the same manner as the Member being replaced was selected. Any replacement made by the parties shall be completed within 28 days after the event giving rise to the vacancy on the Board, failing which the replacement shall be made by SAROD in the same manner as described above. Replacement shall be considered complete when the new Member signs the Board Member's Declaration of Acceptance. Throughout any replacement process, the Members not being replaced shall continue to serve and the Board shall continue to function and its activities shall have the same force and effect as if the vacancy had not occurred, provided, however, that the Board shall not conduct a hearing nor issue a decision until the replacement is completed

(4) If either the Authority or the Concessionaire is dissatisfied with any decision of the Board, and/or if the Board fails to issue its decision within 56 days after receipt of all the pleadings (along with the supporting documents) of the parties by the Chairman of the Board or any extension mutually agreed upon by the Authority and the Concessionaire, in such a case, either the Authority or the Concessionaire may, within 28 days after his receipt of the decision, or within 28 days after the expiry of the said period, as the case may be, give notice to the other party, with a copy for information to the Independent Engineer, of his intention to refer the matter to the Conciliation Committee of Independent Experts (CCIE) of the Authority for Conciliation/amicable settlement.

(5) It is mandatory to refer all the disputes to DRB before issuance of completion certificate and satisfactory completion of punch list items. No dispute shall be entertained after completion of aforementioned date.

(6) If the Board has issued a decision to the Authority and the Concessionaire within 28 days or any extension mutually agreed upon by the Authority and the Concessionaire and no notice of intention to commence Conciliation by the Conciliation Committee of Independent

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29 Aug 2024 20:06:49

Experts (CCIE) of the Authority for Conciliation/amicable settlement as to such dispute has been given by either the Authority or the Concessionaire within 28 days after the parties received such decision from the Board, the decision shall become final and binding upon the Authority and Concessionaire.

(7) Whether or not it has become final and binding upon the Authority and the Concessionaire, a decision shall be admissible as evidence in any subsequent dispute resolution procedure, including any arbitration or litigation having any relation to the dispute to which the decision relates.

(8) All decision of DRB which have become final and binding or till they have been reversed in subsequent conciliation/Arbitration process shall be implemented by the parties forthwith. Such implementation shall also include any relevant action of the Independent Engineer

(9) If during the Concession Period, the Authority and the Concessionaire are of the opinion that the Disputes Resolution Board is not performing its functions properly, the Authority and the Concessionaire may together disband the Disputes Resolution Board and reconstitute it. In that case, a new board shall be selected in accordance with the provisions applying to the selection of the original Board as specified above, except that words "within 28 days after the signing of this Concession Agreement" shall be replaced by the words "within 28 days after the date on which the notice disbanding the original Board became effective

(10) The Authority and the Concessionaire shall jointly sign a notice specifying that the Board shall stand disbanded with effect from the date specified in the notice. The notice shall be posted by email to each Member of the Board. A Member shall be deemed to have received the e mail even if he refuses to have received the same.

(11) All other terms and conditions of the original Concession Agreement shall remain unaltered/unaffected and the parties shall remain bound by terms and conditions as contained therein.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051616179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Annexure to Schedule-S

Disputes Resolution Board's Rules and Procedures

1. Except for providing the services required hereunder, the Board Members shall not give any advice to either party or to the Independent Engineer concerning conduct of the Works. The Board Members:

   (a). Shall have no financial interest in any party to the Concession Agreement, or the Independent Engineer, or a financial interest in the Concession, except for payment for services on the Board.

   (b). Shall have had no previous employment by, or financial ties to, any party to the Concession Agreement, or the Independent Engineer, except for fee based consulting services/advisers on other projects, and/or be Retired Government Officers (not connected in whole or part with the project), all of which must be disclosed in writing to both parties prior to appointment to the Board.

   (c). Shall have disclosed in writing to both parties prior to appointment to the Board any and all recent or close professional or personal relationships with any director, officer, or employee of any party to the Concession Agreement, or the Independent Engineer, and any and all prior involvement in the project to which the Concession relates;

   (d). Shall not, while Board member, be employed whether as a consultant or adviser or otherwise by either party to the Concession Agreement, or the Independent Engineer, except as a Board Member, without the prior consent of the parties and the other Board Members,

   (e). Shall not, while a Board Member, engage in discussion or make any agreement with any party to the Concession Agreement, or with the Independent Engineer, regarding employment whether as a consultant or otherwise whether after the Concession is completed or after service as a Board Member is completed

   (f). Shall remain and be impartial and independent of the parties and shall disclose in writing to the Authority, the Concessionaire and one another any fact or circumstance which might be such as to cause either the Authority or the Concessionaire to question the continued existence of the impartiality and independence required of Board Members; and

   (g). Shall be fluent in the language of the Concession.

2. Except for its participation in the Board's activities as provided in the Concession Agreement and in this Agreement none of the Authority, the Concessionaire, and or the Independent Engineer shall solicit advice or consultation from the Board or the Board Members on matters dealing with the conduct of the Works.

3. The Concessionaire shall:

   (a). Furnish to each Board member one copy of all documents which the Board may request including Concession Agreement, progress reports and other documents pertaining to the performance of the Concession Agreement.

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey V 3.0-WDUS014406(MD from PROXKey)
Date: 29-Aug-2024 20:06:49

(b). In cooperation with the Authority, coordinate the site visits of the Board, including conference facilities, and secretarial and copying service.

4. The Board shall begin its activities following the signing of a Board Member's Declaration of Acceptance by all three Board Members, and it shall terminate these activities as set forth below:

(a). The Board shall terminate its regular activities when either (i) issuance of completion certificate and completion of punch list items or (ii) the parties have terminated the Concession and when, in either case, the Board has communicated to the parties and the Independent Engineer its decision on all disputes previously referred to it.

(b). Once the Board has terminated its regular activities as provided by the previous paragraph, the Board shall remain available to process any dispute referred to it by either party. In case of such a referral, Board Members shall receive payments as provided in paragraphs 7(a) (ii), (iii) and (iv).

5. Board Members shall not assign or subcontract any of their work under these Rules and Procedures.

6. The Board Members are Independent and not employees or agents of either the Authority or the Concessionaire.

7. Payments to the Board Members for their services shall be governed by the following provisions:

(a). Each Board Member will receive payments as follows:

i. A retainer fee per calendar month as specified in the schedule of fee made part of this Schedule and its revision from time to time. This retainer fee shall be considered as payment in full for:

(A). Being available, on 7 days' notice, for all hearings, Site Visits, and other meetings of the Board.

(B). Being conversant with all project developments and maintaining relevant files.

(C). All offices and overhead expenses such as secretarial services, photocopying and office supplies (but not include telephone calls, faxes and telexes) incurred in connection with the duties as a Board Member

ii. A daily fee as specified in the schedule of fee in respect of fee for site visit & meeting, fee for meeting/ hearing not at site and extra charges for days (max. of 02 days for travel on each occasion) other than hearing/meeting days.

iii. Expenses, in addition to the above, all reasonable and necessary travel expenses (including economy class air fare, subsistence, and other direct travel expenses) Receipts for all expenses in excess of Rs. 2000/- (Rupees Two Thousand only) shall be provided.

iv. Reimbursement of any taxes that may be levied on payments made to the Board Member pursuant to this paragraph 7.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05811496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

(b). The retainer fee and other fees shall remain fixed for the period of each Board Member's term until revised by NHAI.

(c). Phasing out of monthly retainer fee. Beginning with the next month after the completion certificate (or, if there are more than one, the one issued last) has been issued, the Board members shall receive only one-third of the monthly retainer fee till next one year. Beginning with the next month after the Board has terminated its regular activities pursuant to paragraph 4(a) above, the Board members shall no longer receive any monthly retainer fee.

(d). Payments to the Board Members shall be shared equally by the Authority and the Concessionaire. The concerned Project Implementation Unit (PIU) of Authority shall pay members' invoices within 30 calendar days after receipt of such invoices and shall invoice the Concessionaire for one-half of the amounts of such invoices. The Concessionaire shall pay such invoices within 30 days' time period after receipt of such invoices.

8. Board Site Visits:

(a). The Board shall visit the Site and meet the representatives of the Authority, the Concessionaire and the Independent Engineer at regular intervals, at times of critical construction events, at the written request of either party, and in any case not less than 6 times in any period of 12 months. The timing of Site visits shall be as agreed among the Authority, the Concessionaire and the Board, but failing agreement shall be fixed by the Board.

(b). Site visits shall include an informal discussion of the status of the construction of the Works. Site visits shall be attended by personnel from the Authority, the Concessionaire and the Independent Engineer

(c). At the conclusion of each Site visit, the Board shall prepare a report covering its activities during the visit and shall send copies to the parties and to the Independent Engineer.

9. Procedure for Dispute Referral to the Board:

(a) If either party objects to any action or inaction of the other party or the Independent Engineer, the objecting party may file a written Notice of Dispute to the other party with a copy to the Independent Engineer stating that it is given pursuant to the Agreement and state clearly and in details the basis of the dispute.

(b) The party receiving the Notice of Dispute will consider it and respond to it in writing within 14 days after receipt.

(C) This response shall be final and conclusive on the subject, unless a written appeal to the response is filed with the responding party within 10 days after receiving the response and call upon Independent Engineer to mediate and assist the parties in arriving an amicable settlement thereof. Both parties are encouraged to pursue the matter further to attempt to settle the dispute.

(d) If the Independent Engineer receiving the Notice of Dispute fails to provide a written response within 14 days after receipt of such Notice or failing mediation by Independent Engineer, either party may require such dispute to be referred to the Board, either party may refer the dispute to the Board by written Request to the Board. The Request for decision shall state clearly and in full detail the specific issues of the dispute (s) to be considered by Board and shall be addressed to the

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS32307130516179(Pradeep)
Signature Not Verified
Digitally Signed
Name: PROXKey V 3.0-WD0561149(MS PROXKey)
Date: 29-Aug-2024 20:06:49

Chairman of the Board, with copies to the other Board Members, the other party, and the Independent Engineer, and it shall state that it is made pursuant to this Agreement.

(e) When a dispute is referred to the Board, and the Board is satisfied that the dispute requires the Board's assistance, the Board decide when to conduct a hearing on the dispute. The Board may request that written documentation and arguments from both parties be submitted to each Board Member before the hearing begins. The parties shall submit insofar as possible agreed statements of the relevant facts.

(f) During the hearing, the Concessionaire, the Authority, and the Independent Engineer shall each have ample opportunity to be heard and to offer evidence. The Board's decision for resolution of the dispute will be given in writing to the Authority, the Concessionaire and the Independent Engineer as soon as possible, and in any event not more than 56 days or any mutually extended period between the Authority and the Concessionaire. The time period of 56 days of issuance of DRB decision will reckon/start from the day of first hearing that begins after submission of complete pleadings (including supporting documents, if any) by the parties.

10. Conduct of Hearings:

(a) Normally hearings will be conducted at the Site, but any location that would be more convenient and still provide all required facilities and access to necessary documentation may be utilized by the Board. Private session of the Board may be held at any cost effective location convenient to the Board. Video recordings of all hearings shall invariably be made.

(b) The Authority, the Independent Engineer and the Concessionaire shall be given opportunity to have representatives at all hearings. Parties should restrain to bring any Advocate/Law Firm during DRB hearings.

(c) During the hearings, no Board Member shall express any opinion concerning the merit of the respective arguments of the parties.

(d) After the hearings are concluded, the Board shall meet privately to formulate its decision. The private meeting (s) of the Board shall not exceed 3 sittings. All Board deliberations shall be conducted in private, with all Members' individual views kept strictly confidential. The Board's decisions, together with an explanation of its reasoning shall be submitted in writing to both parties and to the Independent Engineer. The decision shall be based on the pertinent Concession provisions, applicable laws and regulations and the facts and circumstances involved in the dispute.

(e) The Board shall make every effort to reach a unanimous decision. If this proves impossible the majority shall decide and the dissenting Member may prepare a written minority report together with an explanation of its reasoning for submission to both parties and to the Independent Engineer.

11. In all procedural matters, including the furnishing of written documents and arguments relating to disputes, site visits and conduct of hearings, the Board shall have full and the final authority. If a unanimous decision on any such matter proves impossible, the majority shall prevail.

12. After having been selected and where necessary approved each Board Member shall sign two copies of the following declaration and make one copy available each to the Authority and to the Concessionaire.

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep

Signature Not Verified
Digitally Signed,
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

"BOARD MEMBER'S DECLARATION OF ACCEPTANCE"

WHEREAS

(a). A Concession Agreement (the **Concession**) for the_____ project [fill in the name of project] has been signed on_____[fill in date] between_____ [name of Authority] and _____ [name of Concessionaire] (the Concessionaire).;

(b). The provisions of Agreement and Dispute Resolution Board's rules and procedure provided for establishment and operation of Dispute Resolution Board (DRB).

(c). The undersigned has been selected to serve as a Board Member on said Board;

NOW THEREFORE, the undersigned Board Member hereby declares as follows:

1. I accept the selection as a Board Member and agree to serve on the Board and to be bound by the provisions of Concession Agreement and rules and procedure provided for establishment and operation of Dispute Resolution Board (DRB).

2. With respect to paragraph 1 of Dispute Resolution Board's Rules and Procedure. said Annex A, I declare

   (a). that I have no financial interest of the kind referred to in subparagraph (a):

   (b). that I have had no previous employment nor financial ties of the kind referred to in subparagraph (b); and

   (c). that I have made to both parties any disclosures that may be required by sub-paragraphs (b) and (c).

3. I declare that I have ____ no. of Arbitrations (list enclosed) and no. of DRBs (list enclosed) in progress and that I will give sufficient time for the current assignment.

BOARD MEMBER

_____

_____ (insert name of Board Member)

Date:_____

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Schedule of expenses and fees payable to the Member (s) of Dispute Resolution Board (DRB)

The fee and other expenses payable to the Members of DRB shall be as under:-

S. No.	PARTICULAR	AMOUNT PAYABLE
1.	Retainer-ship fee, secretarial assistance and incidental charges (telephone, fax, postage etc.)	Rs. 50,000/- per month for one package, Rs. 25,000/- per month for 2nd package, Rs. 15,000/- per month for 3rd package and Rs. 10,000/- per month each for 4th, 5th and 6th package (maximum of Rs. 1,20,000/- per month).
2. (i)	Fee for site visit or meetings at site	Rs. 25,000/- per day maximum to Rs. 50,000/- irrespective to number of days of stay at site.
(ii)	Fee for meetings/hearings not at site	Rs. 10,000/- per day
3.	Traveling expenses	Economy class by air, AC first class by train and AC taxi/ own car by road (mileage allowance @ Rs. 24/- per km for travel by taxi/ own car)
4.	Lodging & Boarding	Rs. 15,000/- per day (Metro Cities); or Rs. 10,000/- per day (in other cities); or Rs. 5,000/- per day (own arrangement)
5.	Extra charges for days other than hearing/ meeting days (travel days maximum of 2 days on each occasion)	Rs. 5,000/- per day
6.	Local conveyance	Rs. 2,000/- per day

Notes:

(i) Lodging, boarding and travelling expenses will be allowed only for those members who are residing 100 kms away from the place of meeting.

(ii) Delhi, Mumbai, Chennai, Kolkata, Bangalore and Hyderabad shall be considered as Metro Cities.

(iii) The above schedule of fee and expenses shall be applicable on or after the date of issue of this circular.

(iv) The consent of the concessionaire may be obtained on the above schedule before releasing the payments to the Member(s) as the expenses are to be shared equally by the parties.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Integrity Pact

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

INTEGRITY PACT

Madhya Pradesh Division

Tender No. NHAI/HQ/MP/Budhni-Badi/Pkg-4/2023 Dated: 15.12.2023

This integrity Pact is made at Delhi on this_____ day of……...2024.

BETWEEN

THE NATIONAL HIGHWAYS AUTHORITY OF INDIA (NHAI), a statutory body constituted under the National Highways Authority of India Act, 1988, which has been entrusted with the responsibility of development, maintenance and management of National Highways, having its office at G- 5 & 6, Sector-10, Dwarka, New Delhi, hereinafter referred to as "The Principal", which expression shall, unless repugnant to the meaning of contract thereof, include its successors and permitted assigns)

AND

M/s Shahganj Badi Highways Private Limited hereinafter referred to as "The Bidder(s)/Contractor(s)/Concessionaire(s)/Consultant(s)" and which expression shall unless repugnant to be meaning or context thereof include its successors and permitted assigns.

Preamble

Whereas, the Principal intends to award, under laid down organizational procedure, contract/s for "Construction work of 4-laning of Shahganj bypass end to Badi (Package-IV) of NH-146B from design km 102.000 to design km 142.357 (Design Length 40.357 km) under NH(O) in the State of Madhya Pradesh on Hybrid Annuity Mode". The Principal values full compliance with all relevant laws of the land, rules of land, regulations, economic use of resources and of fairness/ transparency in its relations with its Bidder(s) and for Contractor(s)/ Concessionaire(s)/ Consultant(s).

And Whereas in order to achieve these goals, the Principal will appoint an Independent External Monitors (IEMs), who will monitor the tender process and the execution of the contract for compliance with the Principles mentioned above.

And whereas to meet the purpose aforesaid, both the parties have agreed to enter into this Integrity Pact (hereinafter referred to as "Integrity Pact") the terms and conditions of which shall be read as integral part and parcel of the Tender documents and contract between the parties.

Now, therefore, in consideration of mutual covenants stipulated in this pact, the parties hereby agree as follows and this pact witnesses as under:

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey V 3.0-WIN10611990(Vikas Pandey)
Date: 29-Aug-2024 20:06:49

Article-1: Commitments of the Principal

(1) The Principal commits itself to take all measures necessary to prevent corruption and to observe the following principles:-

(a) No employee of the Principal, personally or through family members, will in connection with the Tender for, or the execution of a Contract, demand, take a promise for or accept, for self, or third person, any material or immaterial benefit which the person is not legally entitled to.

(b) The Principal will, during the Tender process treat all Bidder(s) with equity and reason. The Principal will in particular, before and during the Tender process, provide to all Bidder(s) the same information and will not provide to any Bidder(s) confidential/ additional information through which the Bidder(s) could obtain an advantage in relation to the tender process or the contract execution.

(c) The Principal will exclude all known prejudiced persons from the process.

(2) If the Principal obtains information on the conduct of any of its employees which is a criminal offence under the IPC/PC Act or any other Statutory Acts or if there be a substantive suspicion in this regard, the Principal will inform the Chief Vigilance Officer and in addition can initiate disciplinary actions as per its internal laid down Rules/Regulations.

Article - 2: Commitments of the Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s).

The Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s) commit himself to take all measures necessary to prevent corruption. He commits himself to observe the following principles during his participation in the tender process and during the contract execution.

(a) The Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s) will not, directly or through any other person or firm, offer, promise or give to any of the Principal's employees involved in the tender process or the execution of the contract or to any third person any material or other benefit which he/she is not legally entitled to, in order to obtain in exchange any advantage of any kind whatsoever during the tender process or during the execution of the contract.

(b) The Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s) will not enter with other Bidders into any undisclosed agreement or understanding, whether formal or informal.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD0361149(WDPROXKey)
Date: 29-Aug-2024 20:06:49

This applies in particular to prices, specifications, certifications, subsidiary contract, submission or non-submission or bids or any other actions to restrict competitiveness or to introduce cartelization in the bidding process.

(c) The Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s) will not commit any offence under the relevant IPC/PC Act and other Statutory Acts; further the Bidder(s)/Contractor(s)/Concessionaire(s)/Consultant(s) will not use improperly, for purposes of completion or personal gain, or pass on to others, any information or document provided by the Principal as part of the business relationship, regarding plans, technical proposals and business details, including information contained or transmitted electronically.

(d) The Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s) of foreign origin shall disclose the name and address of the Agents/ Representatives in India, if any. Similarly, the Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s) of Indian Nationality shall furnish the name and address of the foreign principals, if any. Further, details as mentioned in the 'Guidelines on Indian Agents of Foreign Suppliers' shall be disclosed by the Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s). Further, all the payments made to the Indian Agent / Representative have to be Indian Rupees only.

(e) The Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s) will, when presenting his bid, disclose any and all payments he has made, is committed to or intends to make to agents, brokers or any other intermediaries in connection with the award of the contract. He shall also disclose the details of services agreed upon for such payments.

(f) The Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s) will not instigate third persons to commit offences outlined above or be an accessory to such offences.

(g) The Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s) will not bring any outside influence through any Govt. bodies/quarters directly or indirectly on the bidding process in furtherance of his bid.

(h) The Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s) who have signed a Integrity pact shall not approach the court while representing the matter to IEMs and shall wait for their decision in the matter.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Article - 3 Disqualification from tender process and exclusion from future contracts.

(1) If the Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s), before award or during execution has committed a transgression through a violation of any provision of Article2, above or in any other form such as to put his reliability or credibility in question, the Principal is entitled to disqualify the Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s) from the tender process.

(2) If the Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s) has committed a transgression through a violation of Article-2 such as to put his reliability or credibility into question, the Principal shall be entitled to exclude including blacklist and put on holiday the Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s) for any future tenders/ contract award process. The imposition and duration of the exclusion will be determined by the severity of the transgression. The severity will be determined by the Principal taking into consideration the full facts and circumstances of each case particularly taking into account the number of transgressions, the position of the transgressors within the company hierarchy of the Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s) and the amount of the damage. The exclusion will be imposed for a minimum period of 6 months and maximum period of 2 years.

(3) A transgression is considered to have occurred if the Principal after due consideration of the available evidence concludes that "On the basis of facts available there are no material doubts".

(4) The Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s) with its free consent and without any influence agrees and undertakes to respect and uphold the Principal's absolute rights to resort to and impose such exclusion and further accepts and undertakes not to challenge or question such exclusion on any ground, including the lack of any hearing before the decision to resort to such exclusion is taken. This undertaking is given freely and after obtaining independent legal advice.

(5) The decision of the Principal to the effect that a breach of the provisions of this Integrity Pact has been committed by the Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s) shall be final and binding on the Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s), however, the Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s) can approach IEM(s) appointed for the purpose of this Pact.

(6) On occurrence of any sanctions/ disqualification etc. arising out from violation of integrity pact, the Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s) shall not be entitled for any compensation on this account.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep)

Signature Not Verified
Digitally Signed.
Name: PROXKey (Individual WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

(7) Subject to full satisfaction of the Principal, the exclusion of the Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s) could be revoked by the Principal if the Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s) can prove that he has restored/ recouped the damage caused by him and has installed a suitable corruption prevention system in his organization.

Article-4: Compensation for Damages.

(1) If the Principal has disqualified the Bidder(s) from the tender process prior to the award according to Article-3, the Principal shall be entitled to forfeit the Earnest Money Deposit/Bid Security or demand and recover the damages equivalent to Earnest Money Deposit/Bid Security apart from any other legal right that may have accrued to Principal.

(2) In addition to 1 above, the Principal shall be entitled to take recourse to the relevant provisions of the contract related to Termination of Contract due to Contractor/ Concessionaire/Consultant's Default. In such case, the Principal shall be entitled to forfeit the Performance Bank Guarantee of the Contractor/ Concessionaire/ Consultant and/ or demand and recover liquidated and all damages as per the provisions of the contract/concession agreement against Termination.

Article - 5: Previous Transgressions

(1) The Bidder declares that no previous transgressions occurred in the last 3 years immediately before signing of this Integrity Pact with any other Company in any country conforming to the anti corruption/ Transparency International (TI) approach or with any other Public Sector Enterprise/ Undertaking in India or any Government Department in India that could justify his exclusion from the tender process.

(2) If the Bidder makes incorrect statement on this subject, he can be disqualified from the tender process or action for his exclusion can be taken as mentioned under Article-3 above for transgressions of Article-2 and shall be liable for compensation for damages as per Article-4 above.

Article - 6: Equal treatment of all Bidders/ Contractors/ Concessionaires/ Consultants/ Subcontractors.

(1) The Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s) undertake(s) to demand from all sub-contractors a commitment in conformity with this Integrity Pact, and to submit it to the Principal before contract signing.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

(2) The Principal will enter into agreements with identical conditions as this one with all Bidders/ Contractors/ Concessionaires/ Consultants and subcontractors.

(3) The Principal will disqualify from the tender process all Bidders who do not sign this Pact or violate its provisions.

Article - 7: Criminal charges against violating Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s)/ Sub-contractor(s).

If the Principal obtains knowledge of conduct of a Bidder/ Contractor/ Concessionaire/ Consultant or subcontractor, or of an employee or a representative or an associate of a Bidder/ Contractor/ Concessionaire/ Consultant or Subcontractor, which constitutes corruption, or if the Principal has substantive suspicion in this regard, the Principal will inform the same to the Chief Vigilance Officer.

Article- 8: Independent External Monitor (IEM)

(1) The Principal has appointed Smt. Gauri Kumar, IAS (Retd.), Sh. Ashish Bhauguna, (IAS Retd.) and Sh. Animesh Chauhan (Ex-MD & CEO, Oriental Bank of Commerce), as Independent External Monitor (IEM) for this Pact. The task of the Monitor is to review independently and objectively, whether and to what extent the parties comply with the obligations under this agreement.

(2) The Monitor is not subject to instructions by the representatives of the parties and performs his functions neutrally and independently. He reports to the Chairman, NHAI.

(3) The Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s) accepts that the Monitor has the right to access without restriction to all project documentation of the Principal including that provided by the Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s). The Bidder(s)/ Contractor(s)/ Concessionaire(s)/ Consultant(s) will also grant the Monitor, upon his request and demonstration of a valid interest, unrestricted and unconditional access to his project documentation. The same is applicable to Subcontractors.

(4) The Monitor is under contractual obligation to treat the information and documents of the Bidder(s)/Contractor(s)/Subcontractor(s) with confidentiality. The Monitor has also signed on 'Non-disclosure of Confidential Information' and of 'Absence of Conflict of Interest'. In case of any conflict of interest arising at a later date, the IEM shall inform Chairman, NHAI and recuse himself/ herself from that case.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

(5) The Principal will provide to the Monitor sufficient information about all meetings among the parties related to the Project provided such meetings could have an impact on the contractual relations between the Principal and the Bidder/Contractor/ Concessionaire/ Consultant. The parties offer to the Monitor the option to participate in such meetings.

(6) As soon as the Monitor notices, or believes, to notice any transgression as given in Article-2, he may request the Management of the Principal to take corrective action, or to take relevant action. The monitor can in this regard submit non-binding recommendations. Beyond this, the Monitor has no right to demand from the parties that they act in a specific manner, refrain from action or tolerate action.

(7) The Monitor will submit a written report to the Chairman, NHAI within 8 to 10 weeks from the date of reference or intimation to him by the Principal and, should the occasion arise, submit proposals for correcting problematic situations.

(8) If the Monitor has reported to the Chairman, NHAI, a substantiated suspicion of an offence under relevant IPC/PC Act or any other Statutory Acts, and the Chairman, NHAI has not, within the reasonable time taken visible action to proceed against such offence or reported it to the Chief Vigilance Officer, the Monitor may also transmit this information directly to the Central Vigilance Commissioner.

(9) The word 'Monitor' would include both singular and plural.

Article - 9 Pact Duration

This Pact begins when both parties have legally signed it (in case of EPC i.e. for projects funded by Principal and consultancy services). It expires for the Contractor/ Consultant 12 months after his Defect Liability Period is over or 12 months after his last payment under the contract whichever is later and for all other unsuccessful Bidders 6 months after this Contract has been awarded. (In case of BOT Projects) It expires for the concessionaire 24 months after his concession period is over and for all other unsuccessful Bidders 6 months after this Contract has been awarded. Any violation of the same would entail disqualification of the bidder and exclusion from future dealings.

If any claim is made/ lodged during this time, the same shall be binding and continue to be valid despite the lapse of this pact as specified above, unless it is discharged/ determined by Chairman of NHAI.

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161470(Pradeep
Signature Not Verified
Digitally Signed,
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Article - 10 Other Provisions

(1) This pact is subject to Indian Law. Place of performance and jurisdiction is the Registered Office of the Principal, i.e. New Delhi.

(2) Changes and supplements as well as termination notices need to be made in writing.

(3) If the Bidder/Contractor/Concessionaire/Consultant is in a partnership or a Joint Venture partner, this pact must be signed by all partners or members.

(4) Should one or several provisions of this agreement turn out to be invalid, the remainder of this agreement remains valid. In this case, the parties will strive to come to an agreement to their original intentions.

(5) Issue like warranty / Guarantee etc. shall be outside the purview of IEMs.

(6) In the event of any contradiction between the Integrity Pact and its Annexure, the clause in integrity pact shall prevail.

(7) Any disputes/ differences arising between the parties with regard to term of this pact, any action taken by the Principal in accordance with this Pact or interpretation thereof shall not be subject to any Arbitration.

(8) The actions stipulated in this Integrity Pact are without prejudice to any other legal action that may follow in accordance with the provision of the extent law in force relating to any civil or criminal proceedings.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

In witness whereof the parties have signed and executed this Pact at the place and date first done mentioned in the presence of following witness:-

SIGNED, SEALED AND DELIVERED For and on behalf of NATIONAL HIGHWAYS AUTHORITY OF INDIA by:	SIGNED, SEALED AND DELIVERED For and on behalf of SHAHGANJ BADI HIGHWAYS PRIVATE LIMITED by:
Mr. Pradeep Kumar Lal General Manager (Technical) National Highways Authority of India G-5 & 6, Sector-10, Dwarka, New Delhi - 110075	Mr. Chela Ram Mundan Director MCC, Opp Nasrani Petrol Pump, Village Pal, Jodhpur, Rajasthan -342001
In the presence of: 1. Signature Name Address 2. Signature Name Address	In the presence of: 1. Signature Name Address 2. Signature Name Address

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS32307130516179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Annexure

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Corrigendum & Reply to Pre Bid Queries

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

National Highways Authority of India
Madhya Pradesh Divison
G-5&6, Sector-10 Dwarka, New-Delhi-110075

NHAI-HQ/MP/Bhudhni-Badi/ pkg-4/HAM/2023 Date: 25.01.2024

Corrigendum-I

Sub: Construction work of 4-laning of Shahganj bypass end to Badi (Package-IV) of NH-146B from design km 102.000 to design km 142.357 (Design length 40.357 km) under NH (O) in the State of Madhya Pradesh on Hybrid Annuity Mode

Changes in DCA			
Sr.No.	Clause No.	Existing Clause	Modified Clause
1.	Last date of Tender Sale/ Online submission closing date of RFP	29.01.2024 (1100 Hrs)	08.02.2024 (1100 Hrs)
2.	Opening of Technical Bids	30.01.2024 (1130 Hrs)	09.02.2024 (1130 Hrs)
3.	Clause 13.1 of the DCA (Monthly progress reports)	During the Construction Period, the Concessionaire shall, no later than 7 (seven) days after the close of each month, furnish to the Authority and the Independent Engineer a monthly report on physical and financial progress of the Construction Works and shall promptly give such other relevant information as may be required by the Independent Engineer.	During the Construction Period, the Concessionaire shall, no later than 7 (seven) days after the close of each month, furnish to the Authority and the Independent Engineer a monthly report on physical and financial progress of the Construction Works and shall promptly give such other relevant information as may be required by the Independent Engineer. **The Concessionaire shall also submit a detailed report (alongwith each monthly report) indicated the locations and movement of all construction vehicles by way of installing a functional Global Positioning System (GPS) in each vehicle, which shall include, but not limited to, the following information:** i. Real-Time location data of each construction vehicle. ii. Timestamps indicating the start and end time of vehicle movement. iii. Mileage covered by each vehicle The Contractor shall be responsible for ensuring the accuracy and integrity of the GPS tracking data.

Your Faithfully

25/01/2024

(Balbir Singh Yadav)
General Manager, (T)-MP

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

National Highways Authority of India
Madhya Pradesh Division
G - 5 & 6, Sector-10, Dwarka, New Delhi-110075.

NHAI-HQ/MP/Bhudhni-Badi/ pkg-4/HAM/2023 **Date: 05.02.2024**

Corrigendum-II

Sub: Construction work of 4-laning of Shahganj bypass end to Badi (Package-IV) of NH-146B from design km 102.000 to design km 142.357 (Design length 40.357 km) under NH (O) in the State of Madhya Pradesh on Hybrid Annuity Mode: **(Tender ID: 2023_NHAI_178062_1) - Extension of bid due date - Reg.**

Sr.No.	Clause No.	Existing Clause	Modified Clause
1.	Last date of Tender Sale/ online submission closing date of RFP	08.02.2024 (up to 1100 Hrs)	15.02.2024 (Up to 1100 Hrs)
2.	Opening of Technical Bids	09.02.2024 (up to 1130 Hrs)	16.02.2024 (Up to 1130 Hrs)

05/02/2024

(Balbir Singh Yadav)
General Manager, (T)-MP

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

National Highways Authority of India
Madhya Pradesh Division
G- 5 & 6, Sector-10, Dwarka, New Delhi-110075

NHAI-HQ/MP/Bhudhni-Badi/ pkg-4/HAM/2023 Date: 09.02.2024

Addendum-I

Sub: Construction work of 4-laning of Shahganj bypass end to Badi section 2 of NH-146B from design km 102.000 to design km 142.357 (Design Length 40.357 km) under NH(O) in the State of Madhya Pradesh on Hybrid Annuity Mode (Tender ID: **2023_NHAI_178062_1)- Reply to the Pre-Bid Queries.**

Pursuant to section-1 clause 1.3 of RFP, the Authority hereby submits the reply to the pre-bid queries of the prospective bidders as per Annexure-1.

Siddhant Singhai
05/02/24
Siddhant Singhai
Deputy General Manager (T)-MP

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Annexure-I

S. No.	Clause No.	Existing Clause/ Description	Query	Reply
M/s G R Infraprojects Ltd.				
1	Clause 3 Schedule B	**Carriageway** The present Carriageway of the Project Highway is an existing road + New Green Field Alignment. The detail of existing carriageway width is given in Appendix-A-II.	Authority is requested to kindly provide Chainage wise location and crust details for better understanding the project.	Please refer the soil and material investigation report. However, the above report is only for reference purpose and do not form the part of the bidding documents. Bidders are encouraged to do their own investigation before bidding with due diligence. The Authority shall not be responsible for any error in the report provided.
2	Clause 18 Appendix A-III Schedule A	**Utility** The existing utility to be shifted/ relocated is listed in Appendix A-III.	Authority is requested to kindly provide Utility relocation plan for better understanding the project.	The tentative utility shifting plan are already uploaded. However, the bidders are advised to do their own due diligence regarding shifting of the utilities. The utility shifting plans are tentative and for guidance of the bidders. Any change in the utility relocation plan in consultation with the utility owning entity shall not be the basis for change of scope.
3	Annex-II Schedule A	**Dates for providing Right of Way** The dates on which the Authority shall provide Right of Way to the Contractor on different parts of the Site are stated below:	Authority is requested to kindly provide Chainage wise present status of land acquisition.	As per DCA
4	Annex-III Schedule A	Finished road level indicated in the alignment plan shall be followed by the contractor as minimum FRL. In any case, the finished road level of the project highway shall not be less than those indicated in the	Authority is requested to kindly amend/delete the minimum FRL. clause accordingly.	No change as it is minimum/ As per RFP.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-HS23071305161179(Pradeep)
Date: 29-Aug-2024 20:06:49

		alignment plan. The contractor shall, however, improve/upgrade the Road profile as indicated in Annex-III based on site/design requirement.		
5	Annex-III Schedule A	**Alignment Plans** Following drawings are enclosed in digital form in CD marked as Annex –III. • Alignment Plan & Longitudinal Profile.	The appended context of uploaded document Plan & Profile are not same and contradicting each other as follows: So, Authority is requested to kindly clarify the ambiguity and amend clauses accordingly.	Final P&P enclosed herewith for ready reference. The same shall be converted to digital format in CD to be annexed with Concession agreement at the time of agreement.
6	Clause 2.7 Schedule B	**Note:** I Above length of the service/slip roads is minimum specified. The actual length of the service/slip/connecting roads shall be determined by the Concessionaire in accordance with the approved plan & profile and design approved from the Independent Engineer. Any increase/decrease up to 5 percent length from the length specified in this Clause of Schedule-B shall not constitute a Change of Scope. Any additional length shall be dealt in Change of Scope.	The clause/ footnote in Schedule B by Authority is not in line of NHAI Policy guidelines dated 17th September 2020 and are ambiguous. As per NHAI Policy Guideline No 18.53/2020 dated 17th September 2020, Section E, i.e., PROJECT PREPARATION in Sr. No. 04 emphasizes that, Words, "Tentative, approximate, minimum etc." must not be used while defining the scope". Further Sr. No. 08 also stated that, "Scope of works in the Project should be precisely defined in Schedule B & C. And Schedule -B and C should clearly mention the scope of work. ROs and PDs shall ensure the same at the time of preparation of DPRs/Bidding Documents". Hence, Authority is requested to kindly provide the details of Service Road and Connecting Road required in other locations, if any, other than the list mentioned, or the footnote may delete/ amend [illegible] any variation in length [illegible] change of scope under provision 13.	No change/ As per RFP The footnote is as per NHAI Circular no. 11.54 dated 30.10.2023
7	Clause 3.1 Schedule B	**At-grade intersections** A Major Junction B Minor Junction	Authority is requested to kindly provide layout plan for Major and Minor Junctions for better understanding the project.	Revised Plan & Profile including Junction layouts are uploaded.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed
Name: PKI0XKey Vide 30
AWD05611496(MS PROXKey)
Date: 29-Aug-2024 20:06:49

8	Clause 3.2 Schedule B	**At-Grade Intersections below Grade Separators/ Interchanges:** These shall be provided as given in clause 2.9 of this Annexure-I of the Schedule B. (clause No. 3.4.7 of IRC: SP:84-2019/ clause No. 3.2.4 of IRC: SP:87-2019)	Authority is requested to kindly provide layout plan for Major and Minor Junctions for better understanding the project.	Bidders may refer Revised P&P with Junction Layout. Further, Intersections below Grade separators/ interchanges shall be designed as per clause 3.4.7 of Manual.
9	Clause 5.2.2 & 5.2.3 Schedule B	**Recommended Pavement Design** Recommended Pavement Design Not withstanding anything to the contrary contained in this Agreement or the manual, the Concessionaire shall design the pavement of main carriageway for design traffic of 80 MSA. The pavement for service road/slip roads shall be designed for projected traffic subject to minimum as follows: i. Service Roads in Built-up areas for minimum 20 MSA ii. Slip Roads for minimum 20 MSA iii. Service Roads in Rural Area for minimum 20 MSA	Since project design is Concessionaire's responsibility, Can Concessionaire given the liberty to revised/ altered the pavement type from Flexible pavement to other types of pavements considering the specifications and manual to submit the competitive bidding? Please clarify.	The type of pavement cannot be changed. / Rest as per RFP.
10	Clause 8.4 Schedule B	The safety barriers shall be provided in accordance with Section-9 of the Clause 9.7 of the manual. The Safety Barrier length proposed are excluding the safety barrier already proposed on Culverts, Grade Separated Structures, Interchange, Bridges, RoB and RUB as applicable cross sections respectively. End Treatment of Steel barriers/Rope Barrier shall be specified i.e., MELT or P-4 confirming to EN 1317-4, TT, MBCB barrier to Concrete Barrier End Treatment to Concrete barrier shall be done as specified in. The details of the location are as below:	As per Clause 1 of Schedule B, "Development of the Project Highway shall include Design and Construction of the Project Highway as described in Schedule – B and in Schedule -C". As per Clause 3 of Schedule B, "The Project Highway shall be designed and constructed in conformity with the Specifications and Standards specified in Annex-1 of Schedule-D" As per Clause 6 of Schedule-D, "All materials, works and construction operations shall conform to the Manual of Specifications and Standards for Four	Sectional details as provided in the Manual cannot be reduced and may be considered as minimum requirement in case concessionaire wants to design the steel safety barrier. Rest as per RFP.

Signature Not Verified
Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey V 3.0-AWD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

		MoRTH Circular RW/NH-29023/02/2019- S&R(P&B) Government of India dated 01st January 2020, regarding Guidelines for Metal crash barrier (Semi Rigid) to be installed on National Highways.	Laning of Highways (IRC SP 84-2019) referred to as Manual, and MORTH Specifications for Road and Bridge Works. As per Clause 1.4 of the Manual, The Codes, Standards and Technical Specifications and Guidelines applicable for the Design and Construction of the project component are: i. Indian Road Congress (IRC) Codes, Standards and Guidelines. Provisions of IRC 119 Regarding Steel Safety Barriers are mentioned below. Fig.11 & Fig.12 of IRC:119-2015 provide Typical details of the Structural elements for steel safety barriers. Further, as per Cl.4.9 of IRC:119-2015, "The overall Design, length and foundations of the safety barrier shall be such that meet the specifications given in Annexure-II." As per Annexure-II of IRC:119-2015, clause 3 Specifications for Safety Barriers, "The metal safety barriers shall be compliant with test acceptance criteria of European EN 1317-2 standard or NCHRP 350 for containment levels of N2, H1 and H2 or NCHRP350 for containment levels of TL-3 and TL-4. The manufacturer shall provide all applicable crash tested reports that confirm the barrier to have passed the crash test done by an international accredited crash testing laboratory having all the needed facilities." In view of the above, it is requested to clarify whether the Concessionaire is allowed to design the steel safety barrier meeting the specifications and standards	

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey v3.0
Date: 29-Aug-2024 26:06:49

			as mentioned in Cl.4.9 of IRC:119-2015 or the Concessionaire is mandated to provide steel safety barriers conforming to sectional details provided in Fig.11 & Fig.12 of IRC:119-2015.	
11	Clause 2.7 Schedule C	Boundary wall shall be provided along the entire length on either side (including transverse requirements at structure locations) as per the detail given below in accordance with IRC: SP: 84/87. Road boundary walls shall be provided at the boundary on both sides of the right of way available under the control of the Authority, except at ingress and egress points. The boundary walls shall be of reinforced cement concrete as per figure enclosed as Annexure A. At all CD structure locations, the boundary wall shall be discontinued by turning and joining it with the wing/return wall to allow crossing through these structures during dry seasons. In case Chain-link fencing, provide detailed drawings as Annexure A. In case of Pre cast panel fencing, provide cast in situ coping beam on top of fencing. Provide detailed drawings as Annexure A	Typical section of Boundary Wall has been indicated in Schedule B/C of the RFP. The Authority is requested to clarify whether the Concessionaire is allowed to design the boundary wall as per applicable specification & standards and site conditions or the Concessionaire is mandated to follow the Typical section indicated in the Schedule B/C.	The type design given in clause 12.2 of the manual shall be followed. The aesthetic view and component of Boundary wall shall be remain same as per RFP. However, as per ground condition(s), the Contractor/Concessionaire is free to design Foundations only.
12	Article 23.7 O&M Payments	Clause 23.7.1 of DCA states that: The Parties acknowledge and agree that all O&M Expenses shall be borne by the Concessionaire and in lieu thereof. For the performance of its Maintenance obligations, a lump sum financial support in the form of biannual payments shall be due and payable by the Authority. a. For flexible pavement including structures: no maintenance charges shall be paid for the first year; 0.40% of the Bid Project Cost each for the second, third and fourth year; 0.80% of the Bid Project Cost each for the subsequent years till laying of the renewal layer or end of concession period, whichever is earlier. The requirement for the renewal layer shall be worked out based on the survey and investigation of the existing pavement and the cost	We understand that No O&M expense shall be payable for renewal to the Concessionaire if renewal layer is laid in the initial 5 years and during the 5 years after laying of First renewal layer. 1. Please clarify if Concessionaire do renewal layer in certain length of the project in initial 5 year and on balance length after initial 5 years than how the O&M Expenses shall be paid to the Concessionaire. 2. In reply Authority reply is "As per RFP" that we understand that the payment shall be made on prorate basis to the Concessionaire based on length in which renewal layer is laid i.e. @2.4% of	For the length where concessionaire do renewal layer in initial five years shall not be paid in extra and only the O&M expenses @ 0.40% of BPC shall be continued to be paid for the entire length. However, for the partial length where renewal layer is laid after 5 years based on pavement investigation, then 2.4% of BPC shall be paid in ration of L_1 to L. Where L_1 shall be the length where renewal layer is laid and L shall be total length of the project. Further, in subsequent years, the length where renewal layer was laid, shall be paid as 0.4% of BPC multiplied with L_1/L

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey (V 3.0-WDRSP11496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

		of such renewal works shall be made separately to the Concessionaire @ 2.4% of Bid Project Cost. After laying of the renewal layer, the Concessionaire shall be paid @0.40% of the original Bid Project Cost each for the next four years and @ 0.80% of the original Bid Project Cost each till laying of the second renewal layer or end of concession period, whichever is earlier. After laying of the renewal layer, the Concessionaire shall be paid @0.40% of the original Bid Project Cost each for the remaining years till the end of concession period. For the avoidance of doubt, it is clarified that if there is any requirement of renewal layer during the initial 5 years & during the 5 years after laying of first renewal layer then the cost of such renewal layer and any requirement of structural layer during the concession period shall be borne solely by concessionaire. b. For flexible perpetual pavement including structures: no maintenance charges shall be paid for the first year; 0.40% of the Bid Project Cost each for the second, third and fourth year; 0.60% of the Bid Project Cost each for the subsequent years till laying of the renewal layer or end of concession period, whichever is earlier. The requirement for the renewal layer shall be worked out based on the survey and investigation of the existing pavement and the cost of such renewal works shall be made separately to the Concessionaire @ 2.4% of Bid Project Cost. After laying of the renewal layer, the Concessionaire shall be paid @ 0.40% of the original Bid Project Cost each for the next four years and @0.60% of the original Bid Project Cost each till laying of the second renewal layer or end of concession period, whichever is earlier. After laying of the renewal layer, the Concessionaire shall be paid @0.40% of the original Bid Project Cost each for the remaining years till the end of concession period. For the avoidance of doubt, it is clarified that if there is any requirement of renewal layer during the initial 5 years	BPC for the renewal layer plus @0.8% of BPC for the balance project length & subsequently @0.4% of BPC for the length on which renewal has been laid and @0.8% of BPC for the length in which renewal has laid in initial 5 year. Similarly for the length if renewal is laid within five years of first renewal layer. In this regard, it is suggested that instead of paying O&M expenses variably based on the length on which renewal layer has been laid, it would be appropriate, if, Concessionaire is paid on certain prefixed rate for each year throughout the Concession Period.	for next 4 years and for the remaining length L_2, the payment shall be made as 0.8% of the BPC multiplied with L_2/L till laying of the renewal layer or end of the concession period whichever is earlier. $L_1+L_2 = L$ Remaining shall be as per RFP.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

		& during the 5 years after laying of first renewal layer then the cost of such renewal layer and any requirement of structural layer during the concession period shall be borne solely by concessionaire. c. **For rigid pavement including structures:** no maintenance charges shall be paid for the first year; 0.20% of the Bid Project Cost each for the second, third & fourth year, 0.40% of the Bid Project Cost each for fifth, sixth, seventh & eighth year, 0.60% of the Bid Project Cost each till the end of concession period. d. **For stand-alone Bridge/ Tunnel works:** the concessionaire shall be paid no maintenance charges shall be paid for the first year; 0.20% of the Bid Project Cost each for the next five years, 0.40% of the Bid Project Cost each for the remaining years till the end of concession period. The Parties further acknowledge and agree that any O&M Expenses in excess of the O&M Payments shall be borne solely by the Concessionaire save and except as expressly provided in this Agreement. For avoidance of doubt, it is clarified that the O&M Payments will be subject to any Change in Scope of the Project of the Concessionaire under Article 16 of this Agreement.		
13	Clause 8.1.2, Disclaimer	The Concessionaire acknowledges and hereby accepts the risk of inadequacy, mistake or error in or relating to any of the matters set forth in Clause 8.1.1 above and hereby acknowledges and agrees that the Authority shall not be liable for the same in any manner whatsoever to the Concessionaire, {the Consortium Members and their} Associates or any person claiming through or under any of them.	The bidder understands that it only acknowledges and accepts the risk of inadequacy, mistake, or error in or relating to any matter set forth in Clause. 8.1.1, which is limited to the Scope defined in Schedule - B. Anything beyond, that is specified in Schedule - B shall be considered as additional work and dealt under Change of Scope under Article 16.	The Concessionaire have to procure, design and Construct the Project Highway as scope defined in Article 2 of the DCA/RFP. All the risks related to the same are pertains to the Concessionaire. The concessionaire is advised to diligently make careful examination of the site and other provisions stated in Schedule-B.
14	Clause 10.3.4, Procurement of the Site	The Authority shall make best efforts to procure and grant, no later than 90 (ninety) days from the Appointed Date, ...	(a) It is understood that the eligibility for issue of Provisional Completion Certificate, shall be reckoned for ROW that has been	The concessionaire shall be excused for its performance on such land which has not been handed over to the

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey (V 3.0 WD05611496(WD PROXKey)
Date: 29 Aug 2024 20:06:49

			handed over to the Concessionaire, within 180 days from the Appointed Date (AD) subject to the payment of Damages to the Concessionaire under this Clause, even in the case, the provision of deemed withdrawal of works on land, which has not been handed over to Concessionaire, within 180 days of AD has not been exercised by either Parties. (b) We understand that all provisions with respect to Payment Milestone, payment of Annuity, Bonus and other due payments shall remain unaffected and shall be paid in full, in case of conditions clarified in (a) above. During course of execution, it is understood that percentage weightage of works assigned for achievement of all Project Milestones shall be reckoned in proportion to the ROW made available to the Concessionaire with 180 days of AD.	concessionaire within 180 days and such land shall be removed from the scope under provisions of change of scope. In case of reduction in scope on account of non-handing over of land within 180 days, the revised bid project cost shall be used for calculation of all payments in line with clause 16.6 of RFP/DCA.
15	Clause 11.2.1, Shifting of obstructing utilities	…The supervision charges only shall be paid by the Authority to the Utility Owning Entity. In the event of any delay in shifting thereof, the Concessionaire shall be responsible for failure to perform any of its obligations here under if such failure is not as a direct consequence of delay on the part of the entity owning such electric lines, water pipes or telephone cables, as the case may be.	The Bidder understands that in the event of any delay in approval for Shifting of Utilities or the estimates by the Authority/ Utility Owning Agency or occurrence of any other event beyond the control of the Contractor which leads to delay in shifting works, the Concessionaire shall not be responsible for such failure and Extension of Time shall be granted for such failure of the Authority	As per RFP.
16	Clause 14.2, Completion Certificate	Upon completion of Construction Works and the Independent Engineer determining the Tests to be successful, it shall forthwith issue to the Concessionaire and the Authority a certificate substantially in the form set forth in Schedule-J (the **"Completion Certificate")**	Authority is requested to clarify the timelines for issuance of Completion Certificate after completion of works listed in the Punch List.	The Completion Certificate shall be issued after completion of Punch List Items w.e.f. date of completion of punch list items as reported by the IE.

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey v3.0 (WD PROXKey)
Date: 29-Aug-2024 20:06:49

17	Clause 16.2.2 (b), Procedure for Change of Scope	(b) the options for implementing the proposed Change of Scope and the effect, if any, each such option would have on the costs and time thereof, including a detailed breakdown by work classifications specifying the material and labour costs calculated in accordance with the schedule of rates applicable to the works assigned by the Authority to its contractors, along with the proposed premium/discount on such rates; provided that the cost incurred by the Concessionaire in providing such information shall be reimbursed by the Authority to the extent such cost is certified by the Independent Engineer as reasonable.	The Bidder requests to provide the schedule of rates applicable to the works assigned by the Authority to its contractors, along with the proposed premium/discount on such rates.	The latest SOR for the state of MP may be downloaded from the MP PWD official website. As per RFP. The Premium/Discount shall be computed based on comparison with the estimated bid project cost of the authority and as offered by Concessionaire in Financial proposal.
18	Clause 16.2.3, Procedure for Change of Scope	Upon receipt of information set forth in Clause 16.2.2, if the Authority decides to proceed with the Change of Scope, it shall convey its preferred option to the Concessionaire, and the Parties shall, with assistance of the Independent Engineer, thereupon make good faith efforts to agree upon the time and costs for implementation thereof. Upon reaching an agreement, the Authority shall issue an order (the "Change of Scope Order") requiring the Concessionaire to proceed with the performance thereof. In the event that the Parties are unable to agree, the Authority may, by issuing a Change of Scope Order, require the Concessionaire to proceed with the performance thereof pending resolution of the Dispute, or carry out the works in accordance with Clause 16.5.	Kindly clarify the timelines on issuance of Change of Scope Order by Authority from the date of Change of Scope Notice.	Change of Scope order shall be issued within 30 days once the authority decides to proceed with the change of scope. Rest as per RFP.
19	Article 16 – Change of Scope		It is understood by the bidder that in the event of any additional structure included under Change of Scope (CoS), the O&M charges for the same shall be separately payable at the rate mentioned in [illegible] Further, it is understood by the bidder that for any and all CoS Works, all charges against procurement of connection of electricity and bill/charges towards illumination of lighting (above/beneath the	As per RFP.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey (WDS PROXKey)
Date: 29-Aug-2024 20:06:49

			structure) and on approaches of structures, during the O&M Period shall be borne by the Authority.	
20	Clause 17.8.1, Damage for breach of maintenance obligation	In the event that the Concessionaire fails to repair or rectify any defect or deficiency set forth in the Maintenance Requirements within the period specified therein, it shall be deemed to be in breach of this Agreement and the Authority shall be entitled to recover Damages, to be calculated and paid for each day of delay until the breach is cured, at the higher of (a) 2% (two per cent) of the Performance Security, and (b) 0.1% (zero point one per cent) of the cost of such repair or rectification as estimated by the Independent Engineer. Recovery of such Damages shall be without prejudice to the rights of the Authority under this Agreement, including the right of Termination thereof.	This Clause may kindly be deleted since Damages prescribed in this Clause are highly irrational, and the said Clause in its current form can have severe financial implications on the Concessionaire and make the execution of the Project commercially unviable. Also, it is submitted that as provisions of Clause 17.9.1 reasonably cover Damages payable for breach of Maintenance Obligation by the Concessionaire, the same be retained/ affected as a sole remedy against breach/ default in relation to maintenance obligations of the Concessionaire.	As per RFP
21	Clause 23.7.1 a, b, c, d O&M Payments		Kindly clarify whether the Bid Project Cost specified in Clause 23.1 of Concession Agreement (CA) shall be revised from time to time in accordance with the provisions of clause 23.2 of Concession Agreement (CA), so as to reflect the variation in price index occurring after the reference Index Date immediately preceding the Bid Date, for calculation of Maintenance payment and renewal payment payable to the Concessionaire. 1. The Bidder understands that the Bid Project Cost stand modified as per clause 23.2 of the CA, for payment of Maintenance and renewal layers. Kindly clarify. 2. Bidder understands that the Cost of renewal work layer in the respective year shall be paid by the Authority to the Concessionaire in addition to	As per RFP The cost of renewal layer shall be paid as 2.4% of bid project cost and no other maintenance cost shall be paid. The cost of renewal layer shall be paid by the authority upon investigation of the pavement after initial 5 years of construction or renewal, as the case may be. In case the renewal layer has to be laid before initial 5 years of construction/ renewal, the cost of such renewal layer/ structural layer has to be borne solely by the concessionaire. Please refer reply of the previous query. Original bid project cost shall have the meaning similar to the meaning of bid project cost as defined under clause 23.1 as specified in clause 23.7.2..

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey (ir Stamp WD05611496040 PROXKey)
Date: 29-Aug-2024 20:06:49

			maintenance payment to be defined in the respective year. Kindly clarify? 3. Bidder understands that the Authority shall pay the cost of Two renewal layers during the Operation and Maintenance Period, @2.40 % of the Bid Project Cost and the cost of any additional renewal layer (other than aforesaid Two renewal layers) shall be borne by the Concessionaire. Kindly Clarify. 4. Based on survey and investigation of the existing pavement, if the renewal layer required to be laid only on part length of the project, then how the cost of the renewal layer and maintenance payment shall be calculated and paid to the Concessionaire? Kindly define the methodology. 5. Further, the term original Bid Project Cost is only being used for Flexible and Flexible perpetual, not in rigid and standalone Bridge/ Tunnel works, which shall also be clarified.	
22	Clause- 23.7.2	Above amount for the performance of Contractors' Maintenance obligations shall be, inclusive of all taxes (except GST, which shall be payable at applicable rates). The amount payable for maintenance shall be adjusted on account of variation of Price Index. It is further agreed that the Bid Project Cost hereunder shall be reckoned with reference to the amount specified in Clause 23.1, which shall be adjusted to the extent of Change of Scope and Reduction in Scope, but shall not include any price adjustments in pursuance of variation of Price Index..	As per second sentence of the mentioned clause, the maintenance payment shall be adjusted on account of variation in Price Index. It is understood that the provision in last line of this clause is limited to the amounts affected due to Change of Scope and Reduction in Scope only.	The original bid project cost as per article 23.1 shall be considered for computation of maintenance payments. The bid project cost shall be adjusted only to the extent of CoS/RIS but shall not include price adjustments on account of variation of price indices.
23	Clause 26.1, Insurance during	The Concessionaire shall effect and maintain at its own cost, during the Construction Period and the	The bidder understands that in case of extension of Schedule Completion Date for	As per RFP

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

	Concession Period	Operation Period, such insurances for such maximum sums as may be required under the Financing Agreements and Applicable Laws, and such insurances as may be necessary or prudent in accordance with Good Industry Practice. The Concessionaire shall also effect and maintain such insurances as may be necessary for mitigating the risks that may devolve on the Authority as a consequence of any act or omission of the Concessionaire during the Construction Period…..	the reasons attributable to the Authority, the additional cost towards the Insurance premium as per the said clause shall be paid separately to the Concessionaire.	
24	Clause 38.1.3, Dispute Resolution Board (DRB)	Failing mediation by the Independent Engineer or without the intervention of the Independent Engineer, either Party may require such Dispute to be referred to the Dispute Resolution Board ("DRB") in accordance with the procedure set forth in Schedule-S to the Concession Agreement….	It is understood that the Bidder will have the flexibility in appointment of respective DRB members, no restriction should be there to select from the list of empaneled persons by NHAI.	As per RFP/ Schedule-S
25	Annex-II (Schedule-A)	The dates on which the Authority shall provide Right of Way to the Concessionaire on different parts of the Site are stated below:	Authority is requested to provide the Chainage wise Land Acquisition status of Proposed ROW (PROW).	As per RFP.
26	Schedule – I Tests, S. No. 2.8	Other Tests: The Independent Engineer may require the Concessionaire to carry out or cause to be carried additional Tests, in accordance with Good Industry Practice, for determining the compliance of the Project with Specifications and Standards.	The Authority shall clarify the meaning of the Other tests; **the details need to be mentioned specifically about the types of other tests possible as there is minimum but no limit for maximum.**	Based on requirement at site.
27	General		Kindly clarify the cut-off date up to which the published Circulars / IRC specification / gazette notification published by the Competent Authority / GOI / other relevant organizations like IRC/ MORTH etc. shall be taken in consideration for preparation of Bid.	60 Days prior to Bid Due Date as per Clause 1.5 of IRC SP 84 – 2019 (Manual).
28	General	Geotechnical Investigation Report	Authority is requested to kindly provide Geotechnical investigation Report for better understanding of the project.	Enclosed herewith

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed.
Name: PROXKey id Bidder.
WD0561149(WD PROXKey)
Date: 29-Aug-2024 20:06:49

29	General	Hydrology Reports	Authority is requested to kindly provide the hydrology report of project stretch carried out during feasibility study for better evaluation of the project.	However, the above reports are only for reference purpose and do not form the part of the bidding documents. Bidders are encouraged to do their own investigation before bidding with due diligence. The Authority shall not be responsible for any error in the report provided.
30	General	KMZ File	Authority is requested to kindly provide the KMZ File of Project stretch for better understanding the project.	
31	General	Detail Project Reports	Authority is requested to please provide the Detail Project Reports.	

M/s Patel Infra Structure Limited

1	General	General Geo-technical Investigation & Hydrology Report	Kindly provide the Geo Tech Investigation Report and Hydrology Report.	Enclosed Herewith
2	General	**Status of Land Acquisition** i. Total Land required for projects (In Ha.) ii. Land already in possession (In Ha.) iii. Total Additional Land to be acquired a. Private Land (In Ha.) b. Govt. Land (In Ha.) iv. Published Notification Under 3(A) (In Ha.) v. Published Notification Under 3(D) (In Ha. vi. Determination of Compensation amount under Section 3(G) completed (In Ha.) vii. Area of Land for which Funds have been deposited with competent authority for Land Acquisition (CALA) by NHAI (In Ha.) viii. Area of land for which compensation has been disbursed by CALA (In Ha.) ix. Percentage of Total Land required currently possessed by the authority (%)	Kindly share the details of land acquisition status as on date for the subject Project.	As per provisions of Article 4 & 6 of MCA, the land shall be provided to the Concessionaire as specified in Article-10 in conjunction with Schedule A of MCA.
3	General	Detail Project Report	Kindly Provide Detailed Project Report	Enclosed.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

				However, the above reports are only for reference purpose and do not form the part of the bidding documents. Bidders are encouraged to do their own investigation before bidding with due diligence. The Authority shall not be responsible for any error in the report provided.
4	General	KMZ File	It is requested to kindly provide the project alignment's KMZ file for the study of project	Attached herewith.
5	Schedule-A Annex-III	Drainage Plan	As per Schedule-A, Annex-III, drawing of drainage plan is enclosed. But drawing of drainage plan is missing. Kindly provide drawing of drainage plan.	Attached herewith
6	General Drawing	As per Schedule B Slip road is to be constructed	Kindly Provide P&P for the Slip Road.	Attached herewith.
7	General Drawing	Plan & profile	Kindly provide plan & profile in AutoCad file also.	PDF file uploaded.
8	Utility Shifting	The Supervision charges only shall be paid by the Authority to the Utility Owning Entity	Kindly Clarify that who will be bear the cost of Land / Crop Compensation if required to relocate the existing utilities? Kindly also clarify who will be bear the cost of revenue loss if claim by utility owning department	As per RFP and requested to refer clause 13 (e) of schedule-B
9	General	Due Date Extension	We are keenly interested to participate in the above bid, but looking into the clarity required for participation in the bid as requested above and looking into the size and complexity of project, we request the Authority to please provide at least 4 weeks' time for submission of bid from the date of info is received from your end for submission of comprehensive bid	
M/s Oriental Structural Engineers Pvt. Ltd.				
1	General	Geotechnical Investigation reports for structures are not provided	Kindly provide	Enclosed.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2008 CSP India v3.0-HS323071305161179(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29 Aug 2024 20:06:49

2	General	Hydraulic parameters for MJBs/MNBs, are not available.	Kindly provide	However, the above reports are only for reference purpose and do not form the part of the bidding documents. Bidders are encouraged to do their own investigation before bidding with due diligence. The Authority shall not be responsible for any error in the report provided.
3	General	Waterlogged Area along the Highway Alignment, if any.	Kindly provide Details	As per information available, there is no water-logged section. However, the Bidders are requested to inspect the site and assess accordingly.
3	General	With the tender documents, there are two plan and profiles available. MCW levels and SR levels with OGL. MCW levels with OGL.	In both Plan and profile, FRL of the main carriageway is not same. Please clarify, which profile is final.	The MCW named File is Final FRL File wherein the FRL of Main Carriageway is mentioned. SR File is for FRL of Service Road.
4	Highway	**As per Schedule -B clause 2.10, note-04** Toe wall (0.6m ht) to be provided where ROW is restricted and water bodies along the proposed highway on the sections specified in Schedule-B. There are no water bodies chainages mentioned in schedule-B.	Please provide.	Bidders are advised to make due diligence in assessing the project site before submission of bids.
5	Highway	**As per Schedule -B clause 4.0, Road Embankment and Cut Section** The side slopes shall not be steeper than 2H:1V. In case, there is a ROW constraint than, suitable soil retaining structures shall be provided.	As per modified provision of IRC manual cl. 4.2.3.2, Side slopes shall be 1.5H: 1V with Geocell and turfing. Please clarify the same.	As per IRC: SP:84-2019 cl. 4.2.3.2 & Policy Circular No. 11.54/2023 dated 30.10.2023 cl. 4, side slopes shall not be steeper than 2H:1V. In case, there is a ROW constraint than, suitable soil retaining structures shall be provided.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

6	Highway	**As per Schedule -B clause 4.0, Road Embankment and Cut Section** slopes shall be compulsory protected with stone pitching within stone masonry grid structure of 4x4 metre and suitable drains/chutes etc.	Kindly elaborate this point and provide the drawing as it is not clear.	As per RFP.
7	Highway	**As per section 5, Pavement Design** There are two different crust composition has been illustrated in Schedule B. Whether the EPC Contractor has flexibility to change the crust thickness of pavement as per IRC specifications or which one to be follow from the given crust in schedule.	Kindly clarify the same.	The Contractor is free to adopt both method i.e., defined under Clause 5.3.1 of Annex-I of Schedule B or defined under Clause 5.3.2 of Annex-I of Schedule B. However, FRL defined in the RFP are minimum to be achieved.
M/s VRC Constructions (India) Pvt Ltd.				
1.	Schedule -B (Clause no.-7.3.1)	Existing Bridge at following locations Ch.108+760, Ch.123+235, Ch.135+950 & Ch.137+175 to be re-construction as new Structure Total proposed width (MCW-2x12.5 m & S.R-2x10.8m). But Showing in GAD, Total proposed width (MCW-2x10.5m & S.R 2x10.5m).	Kindly clarify to us which one is to be considered.	All the locations are in the approaches of VUP. The necessary corrections have been made vide Corrigendum-III and you are requested to follow the corrected GADs uploaded.
2.	Schedule -B (Clause no.-7.3.1.2)	Existing narrow bridge proposed to be retained and widening at Ch.116+440 & Ch.120+735 Total proposed width (MCW-2x12.5 m). But Showing in GAD, Widening only RHS with 7m median (MCW-1x12.5).	Kindly clarify to us which one is to be considered.	Necessary corrections in schedule-B are made vide corrigendum-III and you are requested to refer the Gad recently uploaded.
3.	Schedule -B (Clause no.-7.3.1)	Existing Bridge at Design Ch.105+740 Total proposed width (MCW-2x12.5m & S.R-2x10.8m). But Showing in GAD, Total proposed width only one side (MCW-1x12.5m).	Kindly clarify to us which one is to be considered.	Necessary corrections in Schedule-B are made vide corrigendum-III and you are requested to refer the Gad recently uploaded.

Signature Not Verified

Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified

Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

4.	General	Authority is requested to Kindly provide the status of land Acquisition.		The land acquisition is in advance stage. The land shall be provided as per the terms of DCA/RFP.
5.	General	Authority is requested to Kindly provide the status of Forest Area.		There is no forest area in Pkg-IV
6.	General	Authority is requested to Kindly provide the Geo Tech Investigation Report and Hydrology Report.		Enclosed. However, the above reports are only for reference purpose and do not form the part of the bidding documents. Bidders are encouraged to do their own investigation before bidding with due diligence. The Authority shall not be responsible for any error in the report provided.

Signature Not Verified

Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified

Digitally Signed.
Name: PROXKey IV 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

National Highways Authority of India
Madhya Pradesh Division
G - 5 & 6, Sector-10, Dwarka, New Delhi-110075.

NHAI-HQ/MP/Bhudhni-Badi/ pkg-4/HAM/2023 Date: 09.02.2024

Corrigendum-III

Sub: Construction work of 4-laning of Shahganj bypass end to Badi (Package-IV) of NH-146B from design km 102.000 to design km 142.357 (Design length 40.357 km) under NH (O) in the State of Madhya Pradesh on Hybrid Annuity Mode: **(Tender ID: 2023_NHAI_178062_1) - Reg.**

Sl. No.	Clause reference	Existing Provision	Modified Provision
Notice Inviting Bid (NIB)			
1.	Column No. 3 of Table under NIB	Estimated Project Cost (Excluding GST) (In Rs. Cr.): **613.62**	Estimated Project Cost (Excluding GST) (In Rs. Cr.): **608.25**
Request for Proposal (RFP):			
2.	Column No. 3 of Table under NIB	Estimated Project Cost (Excluding GST) (In Rs. Cr.): **613.62**	Estimated Project Cost (Excluding GST) (In Rs. Cr.): **608.25**
3.	Column No. 3 of Table under Clause 1.1.1 of RFP	Estimated Project Cost (Excluding GST) (In Rs. Cr.): **613.62**	Estimated Project Cost (Excluding GST) (In Rs. Cr.): **608.25**
4.	Clause 1.2.4 of RFP	A Bidder is required to deposit, along with its Bid, a Bid Security of **Rs. 6.14 Crore (Rupees six crore and fourteen lakh only)** (the "Bid Security"), refundable not later than 90 (ninety) days from the Bid Due Date, except in the case of the Selected Bidder whose Bid Security shall be retained till it has provided a Performance Security under the Agreement. The Bidders will have an option to provide Bid Security in the form of Insurance Surety Bond, Account Payee Demand Draft, Banker's Cheque or Electronic Bank Guarantee (e-Bank Guarantee) acceptable to the Authority, and in such event, the validity period of the Insurance Surety Bond, Account Payee Demand Draft, Banker's Cheque or e-Bank Guarantee shall not be less than 120 (one hundred and twenty) days from the Bid Due Date with a claim period of 60 (sixty) days, and may be extended as may be mutually agreed between the Authority and the Bidder from time to time and that the validity of the demand draft shall not be less than 60 (sixty) days from the Bid Due Date. Upon submission of demand draft, the same shall be encashed by the Authority. The Insurance Surety Bond shall be verified from the specific portal created for this purpose. This e-Bank Guarantee shall be transmitted through SFMS Gateway to NHAI's Bank. The Bid shall be summarily rejected if it is not accompanied by the Bid Security.	A Bidder is required to deposit, along with its Bid, a Bid Security of **Rs. 6.08 Crore (Rupees six crore and eight lakh only)** (the "Bid Security"), refundable not later than 90 (ninety) days from the Bid Due Date, except in the case of the Selected Bidder whose Bid Security shall be retained till it has provided a Performance Security under the Agreement. The Bidders will have an option to provide Bid Security in the form of Insurance Surety Bond, Account Payee Demand Draft, Banker's Cheque or Electronic Bank Guarantee (e-Bank Guarantee) acceptable to the Authority, and in such event, the validity period of the Insurance Surety Bond, Account Payee Demand Draft, Banker's Cheque or e-Bank Guarantee shall not be less than 120 (one hundred and twenty) days from the Bid Due Date with a claim period of 60 (sixty) days, and may be extended as may be mutually agreed between the Authority and the Bidder from time to time and that the validity of the demand draft shall not be less than 60 (sixty) days from the Bid Due Date. Upon submission of demand draft, the same shall be encashed by the Authority. The Insurance Surety Bond shall be verified from the specific portal created for this purpose. This e-Bank Guarantee shall be transmitted through SFMS Gateway to NHAI's Bank. The Bid shall be summarily rejected if it is not accompanied by the Bid Security.

Signature Not Verified
Digitally Signed by HYPERLINK INFRA 2 PRIVATE LIMITED
Name: HyperlinkINFRA2003 CSP
India (e-Proc Gateway)

Signature Not Verified
Digitally Signed by PRAVEEN KUMAR VIDYARTHI
Name: Praveen Kumar Vidyarthi
Date: 09-Feb-2024 17:55:11

5.	**Clause 2.1.6 of RFP**	The Bidder shall deposit a Bid Security of **Rs. 6.14 Crore (Rupees six crore and fourteen lakh only)** in accordance with the provisions of this RFP. The Bidder has the option to provide the Bid Security as Insurance Surety Bond as per the format at Appendix – VIII, Account Payee Demand Draft, Banker's Cheque or e-Bank Guarantee acceptable to the Authority, as per format at Appendix-II. The Bidders shall also make online payment towards cost of bid document of Rs. 70,000/- (Rupees seventy thousand only) transmitted online to NHAI.	The Bidder shall deposit a Bid Security of **Rs. 6.08 Crore (Rupees six crore and eight lakh only)** in accordance with the provisions of this RFP. The Bidder has the option to provide the Bid Security as Insurance Surety Bond as per the format at Appendix – VIII, Account Payee Demand Draft, Banker's Cheque or e-Bank Guarantee acceptable to the Authority, as per format at Appendix-II. The Bidders shall also make online payment towards cost of bid document of Rs. 70,000/- (Rupees seventy thousand only) transmitted online to NHAI.
6.	**Clause 2.2.2 (A) (iii) of RFP**	collected and appropriated revenues from Eligible Project(s) in Category 1 and/or Category 2 specified in Clause 3.4.1, such that the sum total of the above, as further adjusted in accordance with clause 3.4.6, is more than **Rs. 613.62 Crore (Rupees six hundred thirteen crore and sixty two lakh only)** (the "**Threshold Technical Capability**").	collected and appropriated revenues from Eligible Project(s) in Category 1 and/or Category 2 specified in Clause 3.4.1, such that the sum total of the above, as further adjusted in accordance with clause 3.4.6, is more than **Rs. 608.25 Crore (Rupees six hundred eight crore and twenty five lakh only)** (the "**Threshold Technical Capability**"). .....
7.	**Clause 2.2.2 (AA) of RFP**	Provided that at least one similar work of 20% of Estimated Project Cost **Rs. 122.72 crore (Rs. one hundred twenty two crore and seventy two lakh only)** shall have been completed from the Eligible Projects in Category 1 and/or Category 3 specified in Clause 3.4.1. For this purpose, a project shall be considered to be completed, if more than 90% of the value of work has been completed and such completed value of work is equal to or more than 20% of the estimated project cost.	Provided that at least one similar work of 20% of Estimated Project Cost **Rs. 121.65 crore (Rs. one hundred twenty one crore and sixty five lakh only)** shall have been completed from the Eligible Projects in Category 1 and/or Category 3 specified in Clause 3.4.1. For this purpose, a project shall be considered to be completed, if more than 90% of the value of work has been completed and such completed value of work is equal to or more than 20% of the estimated project cost.
8.	**Clause 2.2.2 (B) of RFP**	**Financial Capacity:** The Bidder shall have a minimum Net Worth (the **"Financial Capacity")** of **Rs. 92.04 Crore (Rupees ninety two crore and four lakh only)** at the close of the preceding financial year.	**Financial Capacity:** The Bidder shall have a minimum Net Worth (the **"Financial Capacity"**) of **Rs. 91.24 Crore (Rupees ninety one crore and twenty four lakh only)** at the close of the preceding financial year.
9.	**Clause 2.11.1 (i) of RFP**	BID Security of **Rs 6.14 Crores (Rupees six crore and fourteen lakh only)** in the form of Insurance Surety Bond (issued by Insurance Company authorized by Insurance Regulatory and Development Authority of India in the format at Appendix – VIII), Account Payee Demand Draft, Banker's Cheque or e-Bank Guarantee (in the format at Appendix-II from a Scheduled Bank)	BID Security of **Rs. 6.08 Crore (Rupees six crore and eight lakh only)** in the form of Insurance Surety Bond (issued by Insurance Company authorized by Insurance Regulatory and Development Authority of India in the format at Appendix – VIII), Account Payee Demand Draft, Banker's Cheque or e-Bank Guarantee (in the format at Appendix-II from a Scheduled Bank)
10	**Clause 2.11.2 (e) of RFP**	Bid Security of **Rs 6.14 Crores (Rupees six crore and fourteen lakh only)** in the form of Insurance Surety Bond (issued by Insurance Company authorized by Insurance Regulatory and Development Authority of India in the format at Appendix – VIII), Account Payee Demand Draft, Banker's Cheque or e-Bank Guarantee in the format at Appendix-II from a Scheduled Bank.	Bid Security of **Rs. 6.08 Crore (Rupees six crore and eight lakh only)** in the form of Insurance Surety Bond (issued by Insurance Company authorized by Insurance Regulatory and Development Authority of India in the format at Appendix – VIII), Account Payee Demand Draft, Banker's Cheque or e-Bank Guarantee in the format at Appendix-II from a Scheduled Bank.
11	**Clause 3.4.3 (c) of RFP**	the capital cost of the project should be more than **Rs. 30.68 Crore (Rupees thirty crore and sixty eight lakh only)**; and	the capital cost of the project should be more than **Rs. 30.41 Crore (Rupees thirty crore and forty one lakh only);** and
12	**Clause 3.4.4 of RFP**	For a project to qualify as an Eligible Project under Categories 3 and 4, the Applicant should have paid for execution of its construction works or received payments from its client(s) for construction works executed, fully or partially, during the 5 (five) financial years immediately preceding the Bid Due Date, and only the payments (gross) actually made or received, as the case may be, during such 5 (five) financial years shall qualify for purposes of computing the Experience Score. However, payments/receipts of less than **Rs. 30.68 Crore (Rupees thirty crore and sixty eight lakh only)**; shall not be reckoned as payments/receipts for Eligible Projects. For the avoidance of doubt, construction works shall not include supply of goods or equipment except when such goods or equipment form part of a turn-key	For a project to qualify as an Eligible Project under Categories 3 and 4, the Applicant should have paid for execution of its construction works or received payments from its client(s) for construction works executed, fully or partially, during the 5 (five) financial years immediately preceding the Bid Due Date, and only the payments (gross) actually made or received, as the case may be, during such 5 (five) financial years shall qualify for purposes of computing the Experience Score. However, payments/receipts of less than **Rs. 30.41 Crore (Rupees thirty crore and forty one lakh only)**; shall not be reckoned as payments/receipts for Eligible Projects. For the avoidance of doubt, construction works shall not include supply of goods or

Signature Not Verified
Digitally Signed by HYPERLINK INFRASTRUCTURE PRIVATE LIMITED
Name: HyperLink Infra 03 - HYP20003 CSP
HSS2207230516 (Pardeep)

Signature Not Verified
Digitally Signed by WORKSHOP (Authorised Signatory)
Name: 20003 Hyperlink Infra 03
Date: 27 Jan 2023 10:06:04

		construction contract/ EPC contract for the project. Further, the cost of land shall not be included hereunder.	equipment except when such goods or equipment form part of a turn-key construction contract/ EPC contract for the project. Further, the cost of land shall not be included hereunder.
13	Point No. 21 of Appendix-IA of RFP	I/We offer a Bid Security of **Rs. 6.14 Crore (Rupees six crore and fourteen lakh only)** to the Authority in accordance with the RFP Document	I/We offer a Bid Security of **Rs. 6.08 Crore (Rupees six crore and eight lakh only)** to the Authority in accordance with the RFP Document.
14	Appendix – II; Point 1	Rs. 6.14 Crore (Rupees **six crore and fourteen lakh only)**	Rs. 6.08 Crore (Rupees six crore and eight lakh only)
15	Appendix – II; Point 3	Rs. 6.14 Crore (Rupees **six crore and fourteen lakh only)**	Rs. 6.08 Crore (Rupees six crore and eight lakh only)
16	Appendix – II; Point 13	Rs. 6.14 Crore (Rupees **six crore and fourteen lakh only)**	Rs. 6.08 Crore (Rupees six crore and eight lakh only)
17	Appendix – VIII; Point 1	Rs. 6.14 Crore (Rupees **six crore and fourteen lakh only)**	Rs. 6.08 Crore (Rupees six crore and eight lakh only)
18	Appendix – VIII; Point 3	Rs. 6.14 Crore (Rupees **six crore and fourteen lakh only)**	Rs. 6.08 Crore (Rupees six crore and eight lakh only)
19	Appendix – VIII; Point 13	Rs. 6.14 Crore (Rupees **six crore and fourteen lakh only)**	Rs. 6.08 Crore (Rupees six crore and eight lakh only)
Draft Concession Agreement			
20	Article 35.1 of DCA	If as a result of Change in Law, the Concessionaire suffers an increase in costs or reduction in net after-tax return or other financial burden, the aggregate financial effect of which exceeds the higher of **Rs. 1.23 crore (Rupees one crore and twenty three lakh only)** or 2% (two per cent) of the total Annuity Payments in any Accounting Year, the Concessionaire may so notify the Authority and propose amendments to this Agreement so as to place the Concessionaire in the same financial position as it would have enjoyed had there been no such Change in Law resulting in increased costs, reduction in return or other financial burden as aforesaid. Upon notice by the Concessionaire, the Parties shall meet, as soon as reasonably practicable as but no later than 30 (thirty) days from the date of notice and either agree on amendments to this Agreement or on any other mutually agreed arrangement:	If as a result of Change in Law, the Concessionaire suffers an increase in costs or reduction in net after-tax return or other financial burden, the aggregate financial effect of which exceeds the higher of **Rs. 1.22 crore (Rupees one crore and twenty two lakh only)** or 2% (two per cent) of the total Annuity Payments in any Accounting Year, the Concessionaire may so notify the Authority and propose amendments to this Agreement so as to place the Concessionaire in the same financial position as it would have enjoyed had there been no such Change in Law resulting in increased costs, reduction in return or other financial burden as aforesaid. Upon notice by the Concessionaire, the Parties shall meet, as soon as reasonably practicable as but no later than 30 (thirty) days from the date of notice and either agree on amendments to this Agreement or on any other mutually agreed arrangement:
21	Article 35.2 of DCA	If as a result of Change in Law, the Concessionaire benefits from a reduction in costs or increase in net after-tax return or other financial gains, the aggregate financial effect of which exceeds the higher of **Rs. 1.23 crore (Rupees one crore and twenty three lakh only)** or 2% (two per cent) of the total Annuity Payments in any Accounting Year, the Authority may so notify the Concessionaire and propose amendments to this Agreement so as to place the Concessionaire in the same financial position as it would have enjoyed had there been no such Change in Law resulting in decreased costs, increase in return or other financial gains as aforesaid. Upon notice by the Authority, the Parties shall meet, as soon as reasonably practicable as but no later than 30 (thirty) days from the date of notice and either agree on such amendments to this Agreement or on any other mutually agreed arrangement:	If as a result of Change in Law, the Concessionaire benefits from a reduction in costs or increase in net after-tax return or other financial gains, the aggregate financial effect of which exceeds the higher of **Rs. 1.22 crore (Rupees one crore and twenty two lakh only)** or 2% (two per cent) of the total Annuity Payments in any Accounting Year, the Authority may so notify the Concessionaire and propose amendments to this Agreement so as to place the Concessionaire in the same financial position as it would have enjoyed had there been no such Change in Law resulting in decreased costs, increase in return or other financial gains as aforesaid. Upon notice by the Authority, the Parties shall meet, as soon as reasonably practicable as but no later than 30 (thirty) days from the date of notice and either agree on such amendments to this Agreement or on any other mutually agreed arrangement:

Signature Not Verified
Digitally Signed
Name: HyperPKI VP2003 CSP
India (v3.0-HS32007.3a05d0)(Pradeep)
Signature Not Verified
Digitally Signed
Name: PROXY (v7.3.0-WIN3611.49.BID PROXY key)
Date: 29-Aug-2024 20:06:49

22	**Schedule of expenses and fees payable to the Member (s) of Dispute Resolution Board of Schedule S of DCA**	The fee and other expenses payable to the Members of DRB shall be as under :-	The fee and other expenses payable to the Members of DRB shall be as under :-

S. No.	PARTICULAR	AMOUNT PAYBLE
1	Retainer-ship fee, secretarial assistance and incidental charges (telephone, fax, postage etc.)	Rs. 50,000/- per month for one package **and maximum of Rs. 75,000/- per month for 2 or more packages**
2(i)	Fee for site visit or meetings at site	Rs. 25,000/- per day
(ii)	Fee for meetings/hearings not at site	Rs. 10,000/- per day
3	Traveling expenses	Economy class by air, AC first class by train and AC taxi **by road**
4	Lodging & Boarding	Rs.15,000/- per day (Metro Cities); or Rs. 10,000/- per day (in other cities); or Rs. 5,000/- per day (own arrangement)
5	Extra charges for days other than hearing/meeting days (travel days maximum of 2 days on each occasion)	Rs.5,000/-
6	Local conveyance	Rs. 2,000/-

Notes:

(i) Lodging, boarding and travelling expenses will be allowed only for those members who are residing 100 kms away from the place of meeting.

(ii) Delhi, Mumbai, Chennai, Kolkata, Bangalore and Hyderabad shall be considered as Metro Cities.

(iii) The above schedule of fee and expenses shall be applicable on or after the date of issue of this circular.

(iv) The expenses are to be shared equally by the parties **i.e. Authority and Concessionaire.**

S. No.	PARTICULAR	AMOUNT PAYBLE
1	Retainer-ship fee, secretarial assistance and incidental charges (telephone, fax, postage etc.)	Rs. 50,000/- per month for one package, **Rs. 25,000/- per month for 2nd package, Rs. 15,000/- per month for 3rd package and Rs. 10,000/- per month each for 4th, 5th and 6th package (maximum of Rs. 1,20,000/- per month).**
2(i)	Fee for site visit or meetings at site	Rs. 25,000/- per day **maximum to Rs. 50,000/- irrespective to number of days of stay at site.**
(ii)	Fee for meetings/hearings not at site	Rs. 10,000/- per day
3	Traveling expenses	Economy class by air, AC first class by train and AC taxi**/ own car by road (mileage allowance @ Rs. 24/- per km for travel by taxi/ own car)**
4	Lodging & Boarding	Rs. 15,000/- per day (Metro Cities); or Rs. 10,000/- per day (in other cities); or Rs. 5,000/- per day (own arrangement)
5	Extra charges for days other than hearing/meeting days (travel days maximum of 2 days on each occasion)	Rs. 5,000/- **per day**
6	Local conveyance	Rs. 2,000/- **per day**

Notes:

(i) Lodging, boarding and travelling expenses will be allowed only for those members who are residing 100 kms away from the place of meeting.

(ii) Delhi, Mumbai, Chennai, Kolkata, Bangalore and Hyderabad shall be considered as Metro Cities.

(iii) The above schedule of fees and expenses shall be applicable on or after the date of issue of this circular.

Signature Not Verified
Digitally Signed by
Name: HYDERABAD MYPADMA CSP
India 2.0.3-
HSS20073305b1b79(Pradeep)
Signature Not Verified
Digitally Signed by
Name: HYDERABAD MYPADMA CSP
India 2.0.3-
HSS20073305b1b79(Pradeep)

<table>
<tr><td></td><td></td><td></td><td>(iv) The consent of the concessionaire may be obtained on the above schedule before releasing the payments to the Member(s) as the expenses are to be shared equally by the parties.</td></tr>
<tr><td>23</td><td>Clause 1 (l) project facilities of Schedule-C & Annexure-I of Schedule C</td><td>Advanced Traffic Management System (ATMS)</td><td>Deleted.</td></tr>
<tr><td>24</td><td>Clause 12 Advanced traffic Management System (ATMS)</td><td>The contractor is required to design install, operate and maintain ATMS as part of project facilities.....</td><td>Deleted.</td></tr>
<tr><td>25</td><td>Clause 7.3.1 of Annexure-I of Schedule-B</td><td>1. Existing bridges proposed for reconstructions as new structures:
<table>
<tr><th rowspan="2">Sr. No</th><th rowspan="2">Design Chainage (Km)</th><th rowspan="2">Total Proposed length (m)</th><th rowspan="2">Type of Crossing</th><th colspan="2">Total Proposed width (m)</th><th rowspan="2">Typical Cross Section of Manual</th><th rowspan="2">Skew Angle</th></tr>
<tr><th>MCW</th><th>SR</th></tr>
<tr><td>1</td><td>105+740</td><td>3x6.5</td><td>Stream</td><td>2x12.5</td><td>2x10.80</td><td></td><td></td></tr>
<tr><td>2</td><td>107+195</td><td>3x6.5</td><td>Stream</td><td>10.5+12.5</td><td>2x9.0</td><td></td><td></td></tr>
<tr><td>3</td><td>108+760</td><td>1X7</td><td>Stream</td><td>2x12.5</td><td>2x10.80</td><td></td><td></td></tr>
<tr><td>4</td><td>109+400</td><td>3x10</td><td>Stream</td><td>2x12.5</td><td>-</td><td></td><td></td></tr>
<tr><td>5</td><td>109+550</td><td>4x30</td><td>Stream</td><td>2x12.5</td><td>-</td><td></td><td></td></tr>
<tr><td>6</td><td>114+365</td><td>1x6</td><td>Stream</td><td>2x12.5</td><td>-</td><td></td><td></td></tr>
<tr><td>7</td><td>119+700</td><td>2x6.5</td><td>Stream</td><td>2x12.5</td><td>-</td><td></td><td></td></tr>
<tr><td>8</td><td>123+235</td><td>1x6</td><td>Stream</td><td>2x12.5</td><td>2x10.80</td><td></td><td></td></tr>
<tr><td>9</td><td>135+950</td><td>1X7</td><td>CANAL</td><td>2x12.5</td><td>2x10.80</td><td></td><td></td></tr>
<tr><td>10</td><td>137+175</td><td>3x5</td><td>Stream</td><td>2x12.5</td><td>2x10.80</td><td></td><td></td></tr>
</table></td><td>1. Existing bridges proposed for reconstructions as new structures:
<table>
<tr><th rowspan="2">Sr. No</th><th rowspan="2">Design Chainage (Km)</th><th rowspan="2">Total Proposed length (m)</th><th rowspan="2">Type of Crossing</th><th colspan="2">Total Proposed width (m)</th><th rowspan="2">Typical Cross Section of Manual</th><th rowspan="2">Skew Angle</th></tr>
<tr><th>MCW</th><th>SR</th></tr>
<tr><td>1</td><td>105+740</td><td>3x6.5</td><td>Stream</td><td>2x10.5</td><td>2x10.80</td><td>Fig. 7.2A & 7.2B</td><td></td></tr>
<tr><td>2</td><td>107+195</td><td>3x6.5</td><td>Stream</td><td>10.5+12.5</td><td>2x10.80</td><td>Fig. 7.2A & 7.2B</td><td></td></tr>
<tr><td>3</td><td>108+760</td><td>1X7</td><td>Stream</td><td>2x10.5</td><td>2x10.80</td><td>Fig. 7.2A & 7.2B</td><td></td></tr>
<tr><td>4</td><td>109+400</td><td>3x10</td><td>Stream</td><td>2x12.5</td><td>-</td><td>Fig. 7.2A</td><td></td></tr>
<tr><td>5</td><td>109+550</td><td>4x30</td><td>Stream</td><td>2x12.5</td><td>-</td><td>Fig. 7.2A</td><td></td></tr>
<tr><td>6</td><td>114+365</td><td>1x6</td><td>Stream</td><td>2x12.5</td><td>-</td><td>Fig. 7.2A</td><td></td></tr>
<tr><td>7</td><td>119+700</td><td>2x6.5</td><td>Stream</td><td>2x12.5</td><td>-</td><td>Fig. 7.2A</td><td></td></tr>
<tr><td>8</td><td>123+235</td><td>1x6</td><td>Stream</td><td>2x10.5</td><td>2x10.80</td><td>Fig. 7.2A & 7.2B</td><td></td></tr>
<tr><td>9</td><td>135+950</td><td>1X7</td><td>CANAL</td><td>2x10.5</td><td>2x10.80</td><td>Fig. 7.2A & 7.2B</td><td></td></tr>
<tr><td>10</td><td>137+175</td><td>3x5</td><td>Stream</td><td>2x10.5</td><td>2x10.80</td><td>Fig. 7.2A & 7.2B</td><td></td></tr>
</table></td></tr>
<tr><td>26</td><td>Clause 7.3.1 of Annexure-I of Schedule-B</td><td>2. Existing Narrow Bridges proposed to be retained and widened.
<table>
<tr><th>Sr. No</th><th>Design Chainage (Km)</th><th>Total Proposed length (m)</th><th>Type of Crossing</th><th>Total Proposed width (m)</th><th>Typical Cross Section</th><th>Skew Angle</th></tr>
</table></td><td>2. Existing Narrow Bridges proposed to be retained and widened.
<table>
<tr><th rowspan="2">Sr. No</th><th rowspan="2">Design Chainage (Km)</th><th rowspan="2">Total Proposed length (m)</th><th rowspan="2">Type of Crossing</th><th colspan="2">Total Proposed width (m)</th><th rowspan="2">Typical Cross Section of Manual</th><th rowspan="2">Skew Angle</th></tr>
<tr><th>MCW</th><th>SR</th></tr>
</table></td></tr>
</table>

Signature Not Verified
Digitally Signed by HSS2307230526PRODPeople3
Name: HyperPKI VP2003 CA VP2003 India1x3.0-
Signature Not Verified
Digitally Signed by WDV0501149301 PROW Key
Name: PROW Key 3.0-
Date: 29-Aug-2023

					MCW	SR	of Manual		
		1	116+440	2x5	Stream	2x12.5	-	As per GAD	as per GAD
		2	120+735	4x6.4	Stream	2x12.5	-		
27	Clause 7.3.2 of Annexure-I of Schedule-B	Additional New Bridges: New bridges at the following locations on the Project Highway shall be constructed. GADs for the new bridges are attached in the drawings folder.							
		Sr. No	Design Chainage (Km)	Total Proposed length (m)	Type of Crossing	Total Proposed width (m)		Typical Cross Section	Skew Angle
						MCW	SR	of Manual	
		1	126+630	2x5	Stream	10.5+12.5	2x9.0		
28	General								

1	116+440	2x5	Stream	1x12.5	-	Fig. 7.2A	as per GAD
2	120+735	4x6.4	Stream	1x12.5	-		

Additional New Bridges: New bridges at the following locations on the Project Highway shall be constructed. GADs for the new bridges are attached in the drawings folder.

Sr. No	Design Chainage (Km)	Total Proposed length (m)	Type of Crossing	Total Proposed width (m)		Typical Cross Section	Skew Angle
				MCW	SR	of Manual	
1	126+630	2x5	Stream	10.5+12.5	9.7+10.80	Fig. 7.2A & 7.2B	25

Following Additional documents as requested by the bidders during pre-bid query are uploaded with this corrigendum:

(a) Revised Plan & Profile (MCW & Slip Roads)
(b) Revised GADs of Structures
(c) Revised Utility Plan
(d) Hydraulic Report
(e) Geo-technical Report
(f) Material Report
(g) Revised TCS Schedules
(h) Pavement Design Report
(i) KMZ File
(j) Typical Junction Layouts

Note: Notwithstanding anything contained in this RFP, the Bank guarantee for Bid Security/Performance security, etc. shall also be acceptable as physical Bank Guarantee till 30th June 2024.

09/12/24

Siddhant Singhai
Dy. General Manager (Tech.) - MP

Signature Not Verified
Digitally Signed
Name: HyperPKI V1P2003 CSP India1x3.0-HS2230713305b1b91b9(Pradeep)

Signature Not Verified
Digitally Signed
Name: PROW Key V 3.0-WDI3601149(MD PROW Key)
Date: 29-Aug-2024 20:06:49

National Highways Authority of India
Madhya Pradesh Division
G - 5 & 6, Sector-10, Dwarka, New Delhi-110075.

NHAI-HQ/MP/Bhudhni-Badi/ pkg-4/HAM/2023 **Date: 14.02.2024**

Corrigendum-IV

Sub: Construction work of 4-laning of Shahganj bypass end to Badi (Package-IV) of NH-146B from design km 102.000 to design km 142.357 (Design length 40.357 km) under NH (O) in the State of Madhya Pradesh on Hybrid Annuity Mode: **(Tender ID: 2023_NHAI_178062_1) - Extension of bid due date - Reg.**

-

Sr.No.	Clause No.	Existing Clause	Modified Clause
1.	Last date of Tender Sale/ online submission closing date of RFP	15.02.2024 (Up to 1100 Hrs)	22.02.2024 (Up to 1100 Hrs)
2.	Opening of Technical Bids	16.02.2024 (Up to 1130 Hrs)	23.02.2024 (Up to 1130 Hrs)

14/02/2024

(Balbir Singh Yadav)
General Manager, (T)-MP

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

National Highways Authority of India
Madhya Pradesh Division
G - 5 & 6, Sector-10, Dwarka, New Delhi-110075

NHAI-HQ/MP/Bhudhni-Badi/ pkg-4/HAM/2023

Date: 20.02.2024

Corrigendum-V

Sub: Construction work of 4-laning of Shahganj bypass end to Badi (Package-IV) of NH-146B from design km 102.000 to design km 142.357 (Design length 40.357 km) under NH (O) in the State of Madhya Pradesh on Hybrid Annuity Mode: **(Tender ID: 2023_NHAI_178062_1) - Extension of bid due date - Reg.**

Sr.No.	Clause No.	Existing Clause	Modified Clause
1.	Last date of Tender Sale/ online submission closing date of RFP	22.02.2024 (Up to 1100 Hrs)	27.02.2024 (Up to 1100 Hrs)
2.	Opening of Technical Bids	23.02.2024 (Up to 1130 Hrs)	28.02.2024 (Up to 1130 Hrs)

20/02/2024

(Balbir Singh Yadav)
General Manager (Tech.) - MP

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

National Highways Authority of India
Madhya Pradesh Division
G - 5 & 6, Sector-10, Dwarka, New Delhi-110075

NHAI-HQ/MP/Bhudhni-Badi/ pkg-4/HAM/2023 Date: 20.02.2024

Corrigendum-VI

Sub: Construction work of 4-laning of Shahganj bypass end to Badi (Package-IV) of NH-146B from design km 102.000 to design km 142.357 (Design length 40.357 km) under NH (O) in the State of Madhya Pradesh on Hybrid Annuity Mode: **(Tender ID: 2023_NHAI_178062_1) - Extension of bid due date - Reg.**

Sr.No.	Clause No.	Existing Clause	Modified Clause
1.	Last date of Tender Sale/ online submission closing date of RFP	22.02.2024 (Up to 1100 Hrs)	27.02.2024 (Up to 1100 Hrs)
2.	Opening of Technical Bids	23.02.2024 (Up to 1130 Hrs)	28.02.2024 (Up to 1130 Hrs)
3.	Technical Schedules		Revised Technical Schedules A to D.
4	S. no. 17 (Pre-bid query from M/s G R Infraprojects Pvt Ltd.)	**DCA clause:** Clause 16.2.2 (b), Procedure for Change of Scope The options for implementing the proposed Change of Scope and the effect, if any, each such option would have on the costs and time thereof, including a detailed breakdown by work classifications specifying the material and labour costs calculated in accordance with the schedule of rates applicable to the works assigned by the Authority to its contractors, along with the proposed premium/discount on such rates; provided that the cost incurred by the Concessionaire in providing such information shall be reimbursed by the Authority to the extent such cost is certified by the Independent Engineer as reasonable. **Earlier reply of Pre-bid query:** The latest SOR for the state of MP may be downloaded from the MP PWD official website. As per RFP. The Premium/Discount shall be computed based on comparison with the estimated bid project cost of the authority and as offered by Concessionaire in Financial proposal.	The latest SOR for the state of MP may be downloaded from the MP PWD official website. As per RFP. Current SOR with application of premium/discount offered by Concessionaire at the time of bidding w.r.t. BPC of NHAI. To arrive at BPC of NHAI, EPC given in RFP shall be multiplied by a factor of **1.27**.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey (v3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 10:06:40

(Babir Singh Yadav)
General Manager (Tech.) - MP

National Highways Authority of India
Madhya Pradesh Division
G- 5 & 6, Sector-10, Dwarka, New Delhi-110075

NHAI-HQ/MP/Bhudhni-Badi/ pkg-4/HAM/2023 Date: 23.02.2024

Addendum-II

Sub: Construction work of 4-laning of Shahganj bypass end to Badi section of NH-146B from design km 102.000 to design km 142.357 (Design Length 40.357 km) under NH(O) in the State of Madhya Pradesh on Hybrid Annuity Mode (Tender ID: **2023_NHAI_178062_1)- Reply to the Additional Pre-Bid Queries.**

Pursuant to section-1 clause 1.3 of RFP, the Authority hereby submits the reply to the pre-bid queries of the prospective bidders as per Annexure-1.

23/02/2024

Balbir Singh Yadav
General Manager (T)-MP

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Annexure-I

<table>
<tr><th>S. No.</th><th>Clause No.</th><th>Existing Clause/ Description</th><th>Query</th><th>Reply</th></tr>
<tr><td colspan="5">M/s Dilip Buildcon Limited</td></tr>
<tr><td>1</td><td>Clause 2.7 Schedule C</td><td>Boundary wall and fencing</td><td>Boundary wall shall be provided along the entire length on either side (including transverse requirements at structure locations) as per the detail given below in accordance with IRC: SP: 84/87. Road boundary walls shall be provided at the boundary on both sides of the right of way available under the control of the Authority, except at ingress and egress points. The boundary walls shall be of reinforced cement concrete as per figure enclosed as Annexure A.

Kindly Provide us Annexure A (Drawing of Boundary wall).</td><td>Please refer Standard drawing given in revised Schedule-C already uploaded.</td></tr>
<tr><td>2.</td><td>2.11.1 Sr. no. (O)</td><td>Financial Bid (o) Appendix-IB (Letter comprising the Financial Bid)</td><td>Kindly provide the Bidding excel sheet to quote the Bid price</td><td>Uploaded.</td></tr>
<tr><td>3.</td><td>Clause 11 (A) Schedule B</td><td>Reinforced earth wall</td><td>RE wall stretches do not match with TCS table.</td><td>Please refer revised Schedules already uploaded.</td></tr>
<tr><td>4.</td><td>Clause 2.10 Schedule B</td><td>Typical Cross Section (TCS) of the Project Highway</td><td><table><tr><th>From</th><th>To</th><th>Length</th><th>TCS</th></tr><tr><td>106300</td><td>107360</td><td>1060</td><td>TCS-6</td></tr><tr><td>123940</td><td>124860</td><td>920</td><td>TCS-6</td></tr><tr><td>126060</td><td>127040</td><td>980</td><td>TCS-6</td></tr></table>
Above mentioned stretches TCS-6 given in TCS table which is LHS main carriageway RE wall and RHS main carriageway at grade, but those mentioned stretches RHS FRL not provided by authority.

Kindly provide the RHS Side main carriageway FRL.</td><td>Kindly refer revised Plan & Profile of Service Road (already uploaded) for the RHS FRL of Main Carriageway of mentioned locations.</td></tr>
<tr><td>5.</td><td>Plan and Profile General</td><td>Reconstruction of Stretches with New pavement</td><td>Jabalpur-Bhopal LHS Road FRL and OGL are not correct with graph shown in the plan & profile provided by authority.

Kindly clarify it and provide revised levels.</td><td>Uploaded.</td></tr>
<tr><td>6.</td><td>Clause 5.4 Schedule B</td><td>Reconstruction of Stretches with New pavement</td><td>Kindly provide typical cross section of 0+000 to 1+000 Jabalpur-Bhopal Road.</td><td>Uploaded</td></tr>
<tr><td>7.</td><td>General</td><td></td><td>kindly extend the bid due date because recently Authority uploaded latest documents-Plan & Profile, GAD, Geotech, Hydraulics etc on dated 09th Feb 2024, the bidders need some more time period to work on the updated documents in detailed, hence requesting the Authority to kindly extend the bid due date by at least 2 weeks i.e., 1st March, 2024 from the present bid due date.</td><td>As per last corrigendum.</td></tr>
</table>

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Financial Bid
(Appendix IB)

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

MUNDAN CONSTRUCTION COMPANY
Opp. Nasrani Petrol Pump, Village-Pal, JODHPUR-342001 (Rajasthan)
Mobile : 94141-95366, 94141-92092 E-mail : mundancr@gmail.com

APPENDIX - IB

Letter comprising the Financial BID
(Refer Clauses 2.1.5, 2.11.1 and 3.2)

The General Manager (T)
National Highways Authority of India
G-5&6, Sector 10, Dwarka,
New Delhi - 110 075

Dated:24.02.2024

Sub: BID for Construction work of 4-laning of Shahganj bypass end to Badi (Package-IV) of NH-146B from design km 102.000 to design km 142.357 (Design Length 40.357 km) under NH(O) in the State of Madhya Pradesh on Hybrid Annuity Mode Project

Dear Sir,

With reference to your RFP document dated 13.12.2023, I/we, having examined the Bidding Documents and understood their contents, hereby submit my/our Bid for the aforesaid Project. The Bid is unconditional and unqualified.

2. I/ We acknowledge that the Authority will be relying on the information provided in the Bid and the documents accompanying the Bid for selection of the Concessionaire for the aforesaid Project, and we certify that all information provided in the Bid are true and correct; nothing has been omitted which renders such information misleading; and all documents accompanying the Bid are true copies of their respective originals.

3. The Bid has been quoted by me/us after taking into consideration all the terms and conditions stated in the RFP, Draft Concession Agreement and its Schedules, our own estimates of costs and after a careful assessment of the site and all own the conditions that may affect the Project cost and implementation of the Project.

4. I/ We acknowledge the right of the Authority to reject our Bid without assigning any reason or otherwise and hereby waive, to the fullest extent permitted by applicable law, our right to challenge the same on any account whatsoever.

5. In the event of my/ our being declared as the Selected Bidder, I/we agree to enter into a Concession Agreement in accordance with the draft that has been provided to me/us prior to the Bid Due Date. We agree not to seek any changes in the aforesaid draft and agree to abide by the same.

For M/s Mundan Construction Company

Partner

Signature Not Verified
Digitally Signed
Name: HyperPKI HYP2003 CSP India v3.0-HS3230713051619(Pradeep
Signature Not Verified
Digitally Signed
Name: PROXKey (V3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

6. I/ We shall keep this offer valid for 120 (one hundred and twenty) days from theBid Due Date specified in the RFP.

7. I/ We hereby submit our Bid consisting of Bid Project Cost[2] of Rs. **5190000000** (Rs . **FIVE HUNDRED NINETEEN CRORE ONLY**in words) **excluding GST** for undertaking the aforesaid Project in accordancewith the Bidding Documents and the Concession Agreement.

Yours faithfully,
Thana ram partner of M/s Mundan Construction Company
Date:24.02.2024 (Signature, name and designation of the
Place:jodhpur Authorised Signatory)
Name & seal of Bidder
Class III DSC ID of Authorised Signatory
thana ram

For M/s Mundan Construction Company

Partner

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

NHAI/HQ/MP/Budhni-Badi/Pkg-4/HAM/2023 dated: 15.12.2023	
Name of Work	Construction work of 4-laning of Shahganj bypass end to Badi (Package-IV) of NH-146B from design km 102.000 to design km 142.357 (Design Length 40.357 km) under NH(O) in the State of Madhya Pradesh on Hybrid Annuity Mode
Name of the Bidder	MUNDAN CONSTRUCTION COMPANY
Bid Project Cost in Figures (excluding GST) (In Rs.)	**Bid Project Cost in Words (excluding GST) (In Rs.)**
5190000000	FIVE HUNDRED NINETEEN CRORE ONLY

कोई भी शर्त स्वीकार नही की जायेगी.
No condition shall be accepted.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

Letter of Award (LOA)

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

सत्यमेव जयते

भारतीय राष्ट्रीय राजमार्ग प्राधिकरण
(सड़क परिवहन और राजमार्ग मंत्रालय, भारत सरकार)
National Highways Authority of India
(Ministry of Road Transport and Highways, Government of India)
जी-5 एवं 6, सेक्टर-10, द्वारका, नई दिल्ली - 110 075 ● G-5 & 6, Sector-10, Dwarka, New Delhi-110075
दूरभाष/Phone : 91-11-25074100 / 25074200

Original

NHAI-HQ/MP/Bhudhni-Badi/ pkg-4/HAM/2023 Date: 15.03.2024

To,
M/s Mundan Construction Company,
Opposite Nasrani Petrol Pump,
Village-pal, Jodhpur -342001.
Email: mundancr@gmail.com;

Sub: Construction work of 4-laning of Shahganj bypass end to Badi (Package-IV) of NH-146B from design km 102.000 to design km 142.357 (Design length 40.357 km) under NH (O) in the State of Madhya Pradesh on Hybrid Annuity Mode - **Letter of Acceptance (LOA) - Reg.**

Ref: Your bid submission online on 27.02.2024

Sir,

With reference to NHAI's Request for Proposal for the project cited under subject and considering your proposal in this regard submitted on 27.02.2024 cited under Ref. above, NHAI hereby accepts your proposal with quoted Bid Project Cost of **Rs. 519,00,00,000/-(Rupees Five Hundred Nineteen Crore Only) which is 32.96% lower** than the Estimated Bid Project Cost of **Rs. 774.15 Cr (assessed by NHAI),** as included in Appendix-IB of your bid document, and declares you as the "Selected Bidder" as per the provisions of clause 3.8.1 of the RFP documents.

2. In accordance with the Clause 3.8.4 of the RFP document and clause 1.3 of RFP, you are requested to sign the duplicate copy of LOA and return the same as your acknowledgement on next day of issuance of LOA. Thereafter, pursuant to clause 1.3 of RFP, you are required to execute the Concession Agreement within 45 (forty five) days from the date of issue of LOA.

3. Further, as per RFP documents, you are required to form an appropriate Special Purpose Vehicle, incorporated under the Indian Companies Act 2013 (the "SPV"), to execute the Concession Agreement and implement the Project. The Concessionaire for due and faithful performance of its obligations during the Concession Period shall furnish a Performance Security by way of irrevocable and unconditional bank guarantee of Rs. **15.57 Crore (Rupees Fifteen Crore and Fifty Seven Lakhs) along with additional performance guarantee in accordance with clause 1.2.8 of RFP amounting to** Rs. 8.925 crore (Rupees eight crore ninety two lakh and fifty thousand only) within the period of 30 days from the date of signing of the Concession Agreement, in the form set forth in Schedule-F (the "Performance Security"). Until such time the Performance Security is provided by the Concessionaire, the Bid Security shall remain in full force and effect.

4. You are required to comply with all the terms and conditions set forth in the RFP documents. In case of any default on your part, you shall be liable for action as stated in the bid documents.

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516179(Pradeep

Yours faithfully,

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

15/3/24

(Balbir Singh Yadav)
General Manager (Tech.) - MP

Copy to:

i. RO Bhopal
ii. PD PIU Bhopal

Acceptance of Letter of Award by Selected Bidder

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS23071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey V 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

MUNDAN CONSTRUCTION COMPANY
Opp. Nasrani Petrol Pump, Village-Pal, JODHPUR-342001 (Rajasthan)
Mobile : 94141-95366, 94141-92092 E-mail : mundancr@gmail.com

NHAI-HQ/MP/BUDHNI-BADI/PKG-4/HAM/2023 Dated: - 16.03.2024

To,
National Highways Authority of India
General Manager (Tech) – MP
G - 5 & 6, Sector-10, Dwarka, New Delhi 110075

Ref. : Construction work of 4- laning of Shahganj bypass end to Badi (Package-IV) of NH-146B from design km 102.000 to design km 142.357 (Design Length 40.357 km) under NH(O) in the State of Madhya Pradesh on Hybrid Annuity Mode Project

Your letter ref No. NHAI-HQ/MP/BUDHNI-BADI/PKG-4/HAM/2023 DATED 15.03.2024

Subject :- Regarding Acceptance of LOA Letter

Dear Sir,

In the reference of above mentioned work , it is submitted that we accept your LOA received dated 15.03.2024 having letter ref no. NHAI-HQ/MP/BUDHNI-BADI/PKG-4/HAM/2023 for Construction work of 4- laning of Shahganj bypass end to Badi (Package-IV) of NH-146B from design km 102.000 to design km 142.357 (Design Length 40.357 km) under NH(O) in the State of Madhya Pradesh on Hybrid Annuity Mode Project

Yours faithfully

For Mundan Construction Company

For M/s Mundan Construction Company

Authorized Signatory Partner

Signature Not Verified
Digitally Signed.
Name: HyperPKI HYP2003 CSP India v3.0-HS323071305161179(Pradeep

Signature Not Verified
Digitally Signed.
Name: PROXKey IV 3.0-WD05611496(WD PROXKey)
Date: 29-Aug-2024 20:06:49

सत्यमेव जयते

भारतीय राष्ट्रीय राजमार्ग प्राधिकरण
(सड़क परिवहन और राजमार्ग मंत्रालय, भारत सरकार)
National Highways Authority of India
(Ministry of Road Transport and Highways, Government of India)
जी-5 एवं 6, सेक्टर-10, द्वारका, नई दिल्ली - 110 075 • G-5 & 6, Sector-10, Dwarka, New Delhi-110075
दूरभाष/Phone : 91-11-25074100 / 25074200

Duplicate

NHAI-HQ/MP/Bhudhni-Badi/ pkg-4/HAM/2023

Date: 15.03.2024

To,
M/s Mundan Construction Company,
Opposite Nasrani Petrol Pump,
Village-pal, Jodhpur -342001.
Email: mundancr@gmail.com;

Sub: Construction work of 4-laning of Shahganj bypass end to Badi (Package-IV) of NH-146B from design km 102.000 to design km 142.357 (Design length 40.357 km) under NH (O) in the State of Madhya Pradesh on Hybrid Annuity Mode - **Letter of Acceptance (LOA) - Reg.**

Ref: Your bid submission online on 27.02.2024

Sir,

With reference to NHAI's Request for Proposal for the project cited under subject and considering your proposal in this regard submitted on 27.02.2024 cited under Ref. above, NHAI hereby accepts your proposal with quoted Bid Project Cost of **Rs. 519,00,00,000/-(Rupees Five Hundred Nineteen Crore Only) which is 32.96%** lower than the Estimated Bid Project Cost of **Rs. 774.15 Cr (assessed by NHAI)**, as included in Appendix-IB of your bid document, and declares you as the "Selected Bidder" as per the provisions of clause 3.8.1 of the RFP documents.

2. In accordance with the Clause 3.8.4 of the RFP document and clause 1.3 of RFP, you are requested to sign the duplicate copy of LOA and return the same as your acknowledgement on next day of issuance of LOA. Thereafter, pursuant to clause 1.3 of RFP, you are required to execute the Concession Agreement within 45 (forty five) days from the date of issue of LOA.

3. Further, as per RFP documents, you are required to form an appropriate Special Purpose Vehicle, incorporated under the Indian Companies Act 2013 (the "SPV"), to execute the Concession Agreement and implement the Project. The Concessionaire for due and faithful performance of its obligations during the Concession Period shall furnish a Performance Security by way of irrevocable and unconditional bank guarantee of Rs. **15.57 Crore (Rupees Fifteen Crore and Fifty Seven Lakhs) along with additional performance guarantee in accordance with clause 1.2.8 of RFP amounting to** Rs. 8.925 crore (Rupees eight crore ninety two lakh and fifty thousand only) within the period of 30 days from the date of signing of the Concession Agreement, in the form set forth in Schedule-F (the "Performance Security"). Until such time the Performance Security is provided by the Concessionaire, the Bid Security shall remain in full force and effect.

4. You are required to comply with all the terms and conditions set forth in the RFP documents. In case of any default on your part, you shall be liable for action as stated in the bid documents.

Signature Not Verified

Digitally Signed,
Name: HyperPKI HYP2003 CSP India v3.0-HS2307130516179(Pradeep

Yours faithfully,

Signature Not Verified

Digitally Signed
Name: PROXKey (v 3.0-WD05611496(WD PROXKey)
Date: 29-Apr-2024 20:06:49

(Balbir Singh Yadav)
General Manager (Tech.) - MP

Copy to:

i. RO Bhopal
ii. PD PIU Bhopal

For M/s Mundan Construction Company

Partner